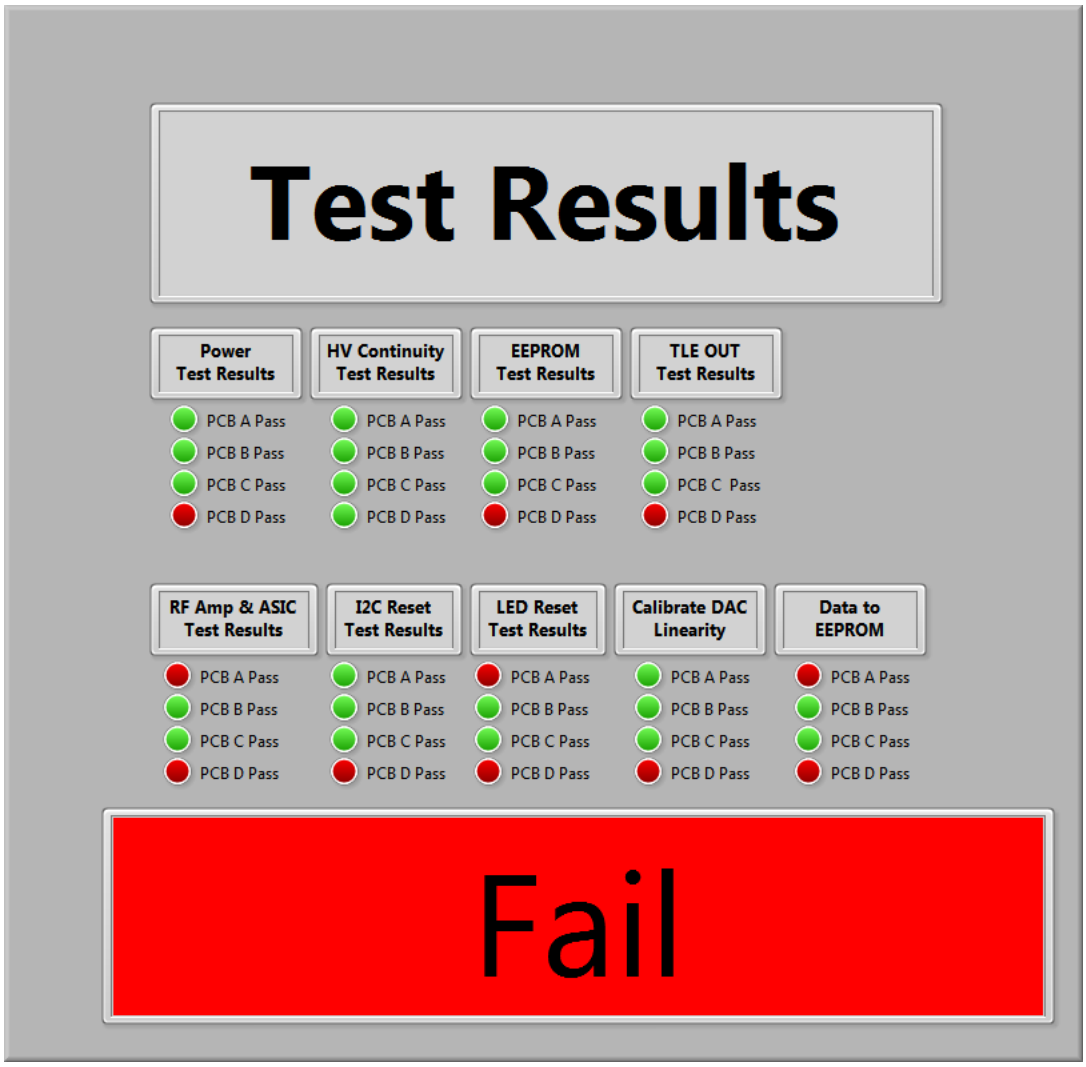

Vision Detector PCB Panel Assembly Functional Test
Test Date: 2025-05-09 15:03:05
Supplier: Jabil
Technician: User1
Customer: Siemens
Test Station: OSP_PCB_FT_01
Test Software Revision: 04
Test Parameters Match Initialization File: TRUE
Year of Manufacture: 2020
Siemens PCBA Part Number: 10752680
Siemens PCBA Revision: 03
Panel Serial Number: RBL03W16188 - Fail
PCB D Serial Number: RBL03W16188D - Fail
PCB C Serial Number: RBL03W16188C - Pass
PCB B Serial Number: RBL03W16188B - Pass
PCB A Serial Number: RBL03W16188A - Fail

Test Description:
Test 1 - Voltage Detector On, Range (VDC)
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
4.90
Test Upper Limit:
5.10
Test Measurement:
0.00
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.250, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 2 - Current Detector On, Range (A)
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.45
Test Upper Limit:
2.65
Test Measurement:
0.01
Units:
Amps
Starting Temperature (Max 50.00 C):
IC1: 24.250, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 3 - Voltage ASIC Registers Loaded, Range (VDC)
PCB Serial Number:
RBL03W16188D

Test Lower Limit:
4.90
Test Upper Limit:
5.10
Test Measurement:
5.00
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.250, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 4 - Current ASIC Registers Loaded, Range (A)
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.70
Test Upper Limit:
3.00
Test Measurement:
2.89
Units:
Amps
Starting Temperature (Max 50.00 C):
IC1: 24.250, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 5 - Voltage Detector On, Range (VDC)
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
4.90
Test Upper Limit:
5.10

Test Measurement:
5.00
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.062, IC2: 23.937; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.437; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 6 - Current Detector On, Range (A)
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
2.45
Test Upper Limit:
2.65
Test Measurement:
2.56
Units:
Amps
Starting Temperature (Max 50.00 C):
IC1: 24.062, IC2: 23.937; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.437; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 7 - Voltage ASIC Registers Loaded, Range (VDC)
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
4.90
Test Upper Limit:
5.10
Test Measurement:
5.00
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.062, IC2: 23.937; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.437; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 8 - Current ASIC Registers Loaded, Range (A)
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
2.70
Test Upper Limit:
3.00
Test Measurement:
2.89
Units:
Amps
Starting Temperature (Max 50.00 C):
IC1: 24.062, IC2: 23.937; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.437; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 9 - Voltage Detector On, Range (VDC)
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
4.90
Test Upper Limit:
5.10
Test Measurement:
5.00
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.125, IC2: 23.875; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 24.562, IC2: 24.250; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 10 - Current Detector On, Range (A)
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
2.45
Test Upper Limit:
2.65
Test Measurement:

2.56
Units:
Amps
Starting Temperature (Max 50.00 C):
IC1: 24.125, IC2: 23.875; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 24.562, IC2: 24.250; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 11 - Voltage ASIC Registers Loaded, Range (VDC)
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
4.90
Test Upper Limit:
5.10
Test Measurement:
5.00
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.125, IC2: 23.875; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 24.562, IC2: 24.250; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 12 - Current ASIC Registers Loaded, Range (A)
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
2.70
Test Upper Limit:
3.00
Test Measurement:
2.89
Units:
Amps
Starting Temperature (Max 50.00 C):
IC1: 24.125, IC2: 23.875; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 24.562, IC2: 24.250; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 13 - Voltage Detector On, Range (VDC)
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
4.90
Test Upper Limit:
5.10
Test Measurement:
5.00
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.062, IC2: 23.937; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 24.500, IC2: 24.250; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 14 - Current Detector On, Range (A)
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
2.45
Test Upper Limit:
2.65
Test Measurement:
2.55
Units:
Amps
Starting Temperature (Max 50.00 C):
IC1: 24.062, IC2: 23.937; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 24.500, IC2: 24.250; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 15 - Voltage ASIC Registers Loaded, Range (VDC)
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
4.90
Test Upper Limit:
5.10
Test Measurement:
5.00

Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.062, IC2: 23.937; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 24.500, IC2: 24.250; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 16 - Current ASIC Registers Loaded, Range (A)
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
2.70
Test Upper Limit:
3.00
Test Measurement:
2.89
Units:
Amps
Starting Temperature (Max 50.00 C):
IC1: 24.062, IC2: 23.937; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 24.500, IC2: 24.250; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 17 - High Voltage Continuity Test
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low
High
Units:
N/A
Starting Temperature N/A
Ending Temperature N/A
Test Result:
Pass
Notes:
N/A

Test Description:
Test 18 - High Voltage Continuity Test
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low
High
Units:
N/A
Starting Temperature N/A
Ending Temperature N/A
Test Result:
Pass
Notes:
N/A

Test Description:
Test 19 - High Voltage Continuity Test
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low
High
Units:
N/A
Starting Temperature N/A
Ending Temperature N/A
Test Result:
Pass
Notes:
N/A

Test Description:
Test 20 - High Voltage Continuity Test
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A

Test Measurement:
Low
High
Units:
N/A
Starting Temperature N/A
Ending Temperature N/A
Test Result:
Pass
Notes:
N/A

Test Description:
Test 21 - EEPROM Test
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
N/A
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 24.562, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.437, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48
PCB EEPROM Check Fail
Failed Read/Write Check at memory location 0X

Test Description:
Test 22 - EEPROM Test
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
N/A
Units:
N/A
Starting Temperature (Max 50.00 C):

IC1: 24.375, IC2: 24.250; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 25.000; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 23 - EEPROM Test
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
N/A
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 24.375, IC2: 24.125; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.375, IC2: 24.875; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 24 - EEPROM Test
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
N/A
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 24.312, IC2: 24.125; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.437, IC2: 24.875; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 25 - TLE Out - IOUTA_Y_P Off
PCB Serial Number:
RBL03W16188D

Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000603
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 26 - TLE Out - IOUTA_Y_P On
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.696789
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 27 - TLE Out - IOUTA_Y_N Off
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000

Test Measurement:
-0.000042
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 28 - TLE Out - IOUTA_Y_N On
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.737704
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 29 - TLE Out - IOUTA_X_P Off
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
-0.000042
Units:
VDC

Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 30 - TLE Out - IOUTA_X_P On
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.703233
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 31 - TLE Out - IOUTA_X_N Off
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
-0.000042
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test

Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 32 - TLE Out - IOUTA_X_N On
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.734483
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 33 - TLE Out - IOUTA_E0_P Off
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
-0.000364
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 34 - TLE Out - IOUTA_E0_P On
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.693568
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 35 - TLE Out - IOUTA_E0_N Off
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
-0.000042
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 36 - TLE Out - IOUTA_E0_N On

PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.695823
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 37 - TLE Out - IOUTA_E1_P Off
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
-0.000042
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 38 - TLE Out - IOUTA_E1_P On
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.500000

Test Upper Limit:
2.800000
Test Measurement:
2.713864
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 39 - TLE Out - IOUTA_E1_N Off
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000281
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 40 - TLE Out - IOUTA_E1_N On
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.728039

Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 41 - TLE Out - IOUTB_Y_P Off
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000281
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 42 - TLE Out - IOUTB_Y_P On
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.704844
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test

Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 43 - TLE Out - IOUTB_Y_N Off
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000603
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 44 - TLE Out - IOUTB_Y_N On
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.723529
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail

Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 45 - TLE Out - IOUTB_X_P Off
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000281
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 46 - TLE Out - IOUTB_X_P On
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.701300
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 47 - TLE Out - IOUTB_X_N Off
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
-0.000042
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 48 - TLE Out - IOUTB_X_N On
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.714831
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 49 - TLE Out - IOUTB_E0_P Off
PCB Serial Number:
RBL03W16188D

Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000281
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 50 - TLE Out - IOUTB_E0_P On
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.695823
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 51 - TLE Out - IOUTB_E0_N Off
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000

Test Measurement:
0.000281
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 52 - TLE Out - IOUTB_E0_N On
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.717730
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 53 - TLE Out - IOUTB_E1_P Off
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
-0.000042
Units:
VDC

Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 54 - TLE Out - IOUTB_E1_P On
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.721596
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 55 - TLE Out - IOUTB_E1_N Off
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
-0.000042
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test

Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 56 - TLE Out - IOUTB_E1_N On
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.731261
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.750, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 57 - TLE Out - IOUTA_Y_P Off
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000448
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:

Test 58 - TLE Out - IOUTA_Y_P On
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.721289
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 59 - TLE Out - IOUTA_Y_N Off
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000770
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 60 - TLE Out - IOUTA_Y_N On
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.752212
Units:

VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 61 - TLE Out - IOUTA_X_P Off
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000126
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 62 - TLE Out - IOUTA_X_P On
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.716135
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 63 - TLE Out - IOUTA_X_N Off

PCB Serial Number:
RBL03W16188C
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000126
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 64 - TLE Out - IOUTA_X_N On
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.716457
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 65 - TLE Out - IOUTA_E0_P Off
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000126
Units:
VDC

Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 66 - TLE Out - IOUTA_E0_P On
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.722900
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 67 - TLE Out - IOUTA_E0_N Off
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000448
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 68 - TLE Out - IOUTA_E0_N On
PCB Serial Number:

RBL03W16188C
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.731919
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 69 - TLE Out - IOUTA_E1_P Off
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000770
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 70 - TLE Out - IOUTA_E1_P On
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.723544
Units:
VDC
Starting Temperature (Max 50.00 C):

IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 71 - TLE Out - IOUTA_E1_N Off
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
-0.000196
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 72 - TLE Out - IOUTA_E1_N On
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.744803
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 73 - TLE Out - IOUTB_Y_P Off
PCB Serial Number:
RBL03W16188C

Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000770
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 74 - TLE Out - IOUTB_Y_P On
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.716780
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 75 - TLE Out - IOUTB_Y_N Off
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000448
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass

Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 76 - TLE Out - IOUTB_Y_N On
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.731919
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 77 - TLE Out - IOUTB_X_P Off
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000126
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 78 - TLE Out - IOUTB_X_P On
PCB Serial Number:
RBL03W16188C
Test Lower Limit:

2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.711626
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 79 - TLE Out - IOUTB_X_N Off
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000126
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 80 - TLE Out - IOUTB_X_N On
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.729986
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):

IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 81 - TLE Out - IOUTB_E0_P Off
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000770
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 82 - TLE Out - IOUTB_E0_P On
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.716135
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 83 - TLE Out - IOUTB_E0_N Off
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
-0.100000

Test Upper Limit:
0.100000
Test Measurement:
0.000126
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 84 - TLE Out - IOUTB_E0_N On
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.725477
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 85 - TLE Out - IOUTB_E1_P Off
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000126
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass

Test Result:
Pass

Test Description:
Test 86 - TLE Out - IOUTB_E1_P On
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.731274
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 87 - TLE Out - IOUTB_E1_N Off
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000126
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 88 - TLE Out - IOUTB_E1_N On
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
2.500000
Test Upper Limit:

2.800000
Test Measurement:
2.711304
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.625, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.062, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 89 - TLE Out - IOUTA_Y_P Off
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000326
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 90 - TLE Out - IOUTA_Y_P On
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.731491
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:

Pass

Test Description:
Test 91 - TLE Out - IOUTA_Y_N Off
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000004
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 92 - TLE Out - IOUTA_Y_N On
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.735035
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 93 - TLE Out - IOUTA_X_P Off
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000

Test Measurement:
0.000004
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 94 - TLE Out - IOUTA_X_P On
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.709583
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 95 - TLE Out - IOUTA_X_N Off
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
-0.000318
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 96 - TLE Out - IOUTA_X_N On
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.717315
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 97 - TLE Out - IOUTA_E0_P Off
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
-0.000318
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 98 - TLE Out - IOUTA_E0_P On
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:

2.698306
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 99 - TLE Out - IOUTA_E0_N Off
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000004
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 100 - TLE Out - IOUTA_E0_N On
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.729880
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 101 - TLE Out - IOUTA_E1_P Off
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000004
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 102 - TLE Out - IOUTA_E1_P On
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.713449
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 103 - TLE Out - IOUTA_E1_N Off
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000326

Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 104 - TLE Out - IOUTA_E1_N On
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.726981
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 105 - TLE Out - IOUTB_Y_P Off
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000648
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:

Test 106 - TLE Out - IOUTB_Y_P On
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.711194
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 107 - TLE Out - IOUTB_Y_N Off
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000648
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 108 - TLE Out - IOUTB_Y_N On
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.739546
Units:

VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 109 - TLE Out - IOUTB_X_P Off
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000648
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 110 - TLE Out - IOUTB_X_P On
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.695407
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 111 - TLE Out - IOUTB_X_N Off

PCB Serial Number:
RBL03W16188B
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
-0.000318
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 112 - TLE Out - IOUTB_X_N On
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.724081
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 113 - TLE Out - IOUTB_E0_P Off
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
-0.000640
Units:
VDC

Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 114 - TLE Out - IOUTB_E0_P On
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.704106
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 115 - TLE Out - IOUTB_E0_N Off
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000004
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 116 - TLE Out - IOUTB_E0_N On
PCB Serial Number:

RBL03W16188B
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.747279
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 117 - TLE Out - IOUTB_E1_P Off
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000326
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 118 - TLE Out - IOUTB_E1_P On
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.706039
Units:
VDC
Starting Temperature (Max 50.00 C):

IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 119 - TLE Out - IOUTB_E1_N Off
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000004
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 120 - TLE Out - IOUTB_E1_N On
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.722148
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.250, IC2: 24.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 121 - TLE Out - IOUTA_Y_P Off
PCB Serial Number:
RBL03W16188A

Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.001293
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 122 - TLE Out - IOUTA_Y_P On
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.714126
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 123 - TLE Out - IOUTA_Y_N Off
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.001293
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass

Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 124 - TLE Out - IOUTA_Y_N On
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.726377
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 125 - TLE Out - IOUTA_X_P Off
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.001615
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 126 - TLE Out - IOUTA_X_P On
PCB Serial Number:
RBL03W16188A
Test Lower Limit:

2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.711869
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 127 - TLE Out - IOUTA_X_N Off
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.001293
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 128 - TLE Out - IOUTA_X_N On
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.732502
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):

IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 129 - TLE Out - IOUTA_E0_P Off
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.001293
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 130 - TLE Out - IOUTA_E0_P On
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.711547
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 131 - TLE Out - IOUTA_E0_N Off
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
-0.100000

Test Upper Limit:
0.100000
Test Measurement:
0.001293
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 132 - TLE Out - IOUTA_E0_N On
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.704777
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 133 - TLE Out - IOUTA_E1_P Off
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.001615
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass

Test Result:
Pass

Test Description:
Test 134 - TLE Out - IOUTA_E1_P On
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.721218
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 135 - TLE Out - IOUTA_E1_N Off
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.001615
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 136 - TLE Out - IOUTA_E1_N On
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
2.500000
Test Upper Limit:

2.800000
Test Measurement:
2.734114
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 137 - TLE Out - IOUTB_Y_P Off
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.001938
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 138 - TLE Out - IOUTB_Y_P On
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.693171
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:

Pass

Test Description:
Test 139 - TLE Out - IOUTB_Y_N Off
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.001615
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 140 - TLE Out - IOUTB_Y_N On
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.693171
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 141 - TLE Out - IOUTB_X_P Off
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000

Test Measurement:
0.001938
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 142 - TLE Out - IOUTB_X_P On
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.687368
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 143 - TLE Out - IOUTB_X_N Off
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.001615
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 144 - TLE Out - IOUTB_X_N On
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.704132
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 145 - TLE Out - IOUTB_E0_P Off
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.000971
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 146 - TLE Out - IOUTB_E0_P On
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:

2.717027
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 147 - TLE Out - IOUTB_E0_N Off
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.001615
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 148 - TLE Out - IOUTB_E0_N On
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.735081
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 149 - TLE Out - IOUTB_E1_P Off
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.001293
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 150 - TLE Out - IOUTB_E1_P On
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.717350
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 151 - TLE Out - IOUTB_E1_N Off
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
-0.100000
Test Upper Limit:
0.100000
Test Measurement:
0.001938

Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 152 - TLE Out - IOUTB_E1_N On
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
2.500000
Test Upper Limit:
2.800000
Test Measurement:
2.727344
Units:
VDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.187, IC2: 24.937; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 153 - RF Amp & ASIC Trigger Test, ASIC 0
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.937, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 26.625, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 154 - RF Amp & ASIC Trigger Test, ASIC 1
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.937, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 26.625, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 155 - RF Amp & ASIC Trigger Test, ASIC 2
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.937, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 26.625, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 156 - RF Amp & ASIC Trigger Test, ASIC 3

PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.937, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 26.625, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 157 - RF Amp & ASIC Trigger Test, ASIC 4
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.937, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 26.625, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 158 - RF Amp & ASIC Trigger Test, ASIC 5
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A

Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.937, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 26.625, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 159 - RF Amp & ASIC Trigger Test, ASIC 6
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.937, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 26.625, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 160 - RF Amp & ASIC Trigger Test, ASIC 7
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments

Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.937, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 26.625, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 161 - RF Amp & ASIC Trigger Test, ASIC 0
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.437, IC2: 26.125; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 162 - RF Amp & ASIC Trigger Test, ASIC 1
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.437, IC2: 26.125; Temp OK - Pass
Test Result:

Pass

Test Description:
Test 163 - RF Amp & ASIC Trigger Test, ASIC 2
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.437, IC2: 26.125; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 164 - RF Amp & ASIC Trigger Test, ASIC 3
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.437, IC2: 26.125; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 165 - RF Amp & ASIC Trigger Test, ASIC 4
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)

Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.437, IC2: 26.125; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 166 - RF Amp & ASIC Trigger Test, ASIC 5
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.437, IC2: 26.125; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 167 - RF Amp & ASIC Trigger Test, ASIC 6
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.437, IC2: 26.125; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 168 - RF Amp & ASIC Trigger Test, ASIC 7
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.812, IC2: 24.687; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.437, IC2: 26.125; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 169 - RF Amp & ASIC Trigger Test, ASIC 0
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.500, IC2: 26.000; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 170 - RF Amp & ASIC Trigger Test, ASIC 1
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:

Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.500, IC2: 26.000; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 171 - RF Amp & ASIC Trigger Test, ASIC 2
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.500, IC2: 26.000; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 172 - RF Amp & ASIC Trigger Test, ASIC 3
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.500, IC2: 26.000; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 173 - RF Amp & ASIC Trigger Test, ASIC 4
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.500, IC2: 26.000; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 174 - RF Amp & ASIC Trigger Test, ASIC 5
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.500, IC2: 26.000; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 175 - RF Amp & ASIC Trigger Test, ASIC 6
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments

Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.500, IC2: 26.000; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 176 - RF Amp & ASIC Trigger Test, ASIC 7
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.875, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.500, IC2: 26.000; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 177 - RF Amp & ASIC Trigger Test, ASIC 0
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.687, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.187, IC2: 25.875; Temp OK - Pass
Test Result:
Pass

Test Description:

Test 178 - RF Amp & ASIC Trigger Test, ASIC 1
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.687, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.187, IC2: 25.875; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 179 - RF Amp & ASIC Trigger Test, ASIC 2
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 0.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.687, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.187, IC2: 25.875; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 180 - RF Amp & ASIC Trigger Test, ASIC 3
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Fail
Units:

mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.687, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.187, IC2: 25.875; Temp OK - Pass
Test Result:
Fail
Notes:
0 Pulse(s), Pulse Width (ns): 0

Test Description:
Test 181 - RF Amp & ASIC Trigger Test, ASIC 4
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.687, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.187, IC2: 25.875; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 182 - RF Amp & ASIC Trigger Test, ASIC 5
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.687, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.187, IC2: 25.875; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 183 - RF Amp & ASIC Trigger Test, ASIC 6
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.687, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.187, IC2: 25.875; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 184 - RF Amp & ASIC Trigger Test, ASIC 7
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
100.000000 (mV)
Test Measurement:
Pass - Successfully triggered from 100.000000 to 10.000000 (mV) in 10.000000 (mV) Increments
Units:
mVDC
Starting Temperature (Max 50.00 C):
IC1: 24.687, IC2: 24.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.187, IC2: 25.875; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 185 - I2C Reset Test
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:

I2C Reset failed on
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.250, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.812, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 186 - I2C Reset Test
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
I2C Reset Successful
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.250, IC2: 25.125; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.687, IC2: 25.500; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 187 - I2C Reset Test
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
I2C Reset Successful
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.437, IC2: 25.187; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.875, IC2: 25.500; Temp OK - Pass

Test Result:
Pass

Test Description:
Test 188 - I2C Reset Test
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
I2C Reset Successful
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.312, IC2: 25.187; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 25.687, IC2: 25.500; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 189 - External LED Reset Test, ASIC 0
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Fail
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.375, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 26.937, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s),   Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:

Test 190 - External LED Reset Test, ASIC 1
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Fail
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.375, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 26.937, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 191 - External LED Reset Test, ASIC 2
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Fail
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.375, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 26.937, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 192 - External LED Reset Test, ASIC 3
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Fail
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.375, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 26.937, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 193 - External LED Reset Test, ASIC 4
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Fail
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.375, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 26.937, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 194 - External LED Reset Test, ASIC 5
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Fail
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.375, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 26.937, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s),   Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 195 - External LED Reset Test, ASIC 6
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Fail
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.375, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 26.937, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
Initial Trigger: ASIC Successfully Triggered

Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 196 - External LED Reset Test, ASIC 7
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Fail
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.375, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 26.937, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 197 - External LED Reset Test, ASIC 0
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.187, IC2: 25.062; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.812, IC2: 26.437; Temp OK - Pass
Test Result:
Pass

Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 198 - External LED Reset Test, ASIC 1
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.187, IC2: 25.062; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.812, IC2: 26.437; Temp OK - Pass
Test Result:
Pass
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 199 - External LED Reset Test, ASIC 2
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.187, IC2: 25.062; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.812, IC2: 26.437; Temp OK - Pass
Test Result:
Pass

Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 200 - External LED Reset Test, ASIC 3
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.187, IC2: 25.062; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.812, IC2: 26.437; Temp OK - Pass
Test Result:
Pass
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 201 - External LED Reset Test, ASIC 4
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.187, IC2: 25.062; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.812, IC2: 26.437; Temp OK - Pass
Test Result:
Pass

Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 202 - External LED Reset Test, ASIC 5
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.187, IC2: 25.062; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.812, IC2: 26.437; Temp OK - Pass
Test Result:
Pass
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 203 - External LED Reset Test, ASIC 6
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.187, IC2: 25.062; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.812, IC2: 26.437; Temp OK - Pass
Test Result:
Pass

Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 204 - External LED Reset Test, ASIC 7
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.187, IC2: 25.062; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.812, IC2: 26.437; Temp OK - Pass
Test Result:
Pass
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 205 - External LED Reset Test, ASIC 0
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.250, IC2: 25.000; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.937, IC2: 26.500; Temp OK - Pass
Test Result:
Pass

Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 206 - External LED Reset Test, ASIC 1
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.250, IC2: 25.000; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.937, IC2: 26.500; Temp OK - Pass
Test Result:
Pass
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 207 - External LED Reset Test, ASIC 2
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.250, IC2: 25.000; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.937, IC2: 26.500; Temp OK - Pass
Test Result:
Pass

Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 208 - External LED Reset Test, ASIC 3
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.250, IC2: 25.000; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.937, IC2: 26.500; Temp OK - Pass
Test Result:
Pass
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 209 - External LED Reset Test, ASIC 4
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.250, IC2: 25.000; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.937, IC2: 26.500; Temp OK - Pass
Test Result:
Pass

Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 210 - External LED Reset Test, ASIC 5
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.250, IC2: 25.000; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.937, IC2: 26.500; Temp OK - Pass
Test Result:
Pass
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 211 - External LED Reset Test, ASIC 6
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.250, IC2: 25.000; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.937, IC2: 26.500; Temp OK - Pass
Test Result:
Pass

Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 212 - External LED Reset Test, ASIC 7
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.250, IC2: 25.000; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.937, IC2: 26.500; Temp OK - Pass
Test Result:
Pass
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 213 - External LED Reset Test, ASIC 0
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.000, IC2: 24.875; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.187, IC2: 26.875; Temp OK - Pass
Test Result:
Pass

Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 214 - External LED Reset Test, ASIC 1
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.000, IC2: 24.875; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.187, IC2: 26.875; Temp OK - Pass
Test Result:
Pass
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 215 - External LED Reset Test, ASIC 2
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.000, IC2: 24.875; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.187, IC2: 26.875; Temp OK - Pass
Test Result:
Pass

Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 216 - External LED Reset Test, ASIC 3
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Fail
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.000, IC2: 24.875; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.187, IC2: 26.875; Temp OK - Pass
Test Result:
Fail
Notes:
Initial Trigger: 0 Pulse(s), Pulse Width (ns): 0
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): 0 Pulse(s), Pulse Width (ns): 0

Test Description:
Test 217 - External LED Reset Test, ASIC 4
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.000, IC2: 24.875; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.187, IC2: 26.875; Temp OK - Pass
Test Result:
Pass

Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 218 - External LED Reset Test, ASIC 5
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.000, IC2: 24.875; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.187, IC2: 26.875; Temp OK - Pass
Test Result:
Pass
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 219 - External LED Reset Test, ASIC 6
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.000, IC2: 24.875; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.187, IC2: 26.875; Temp OK - Pass
Test Result:
Pass

Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 220 - External LED Reset Test, ASIC 7
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Pass
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.000, IC2: 24.875; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.187, IC2: 26.875; Temp OK - Pass
Test Result:
Pass
Notes:
Initial Trigger: ASIC Successfully Triggered
Second Trigger (Not Reset): 0 Pulse(s), Pulse Width (ns): 0
Third Trigger (Reset): ASIC Successfully Triggered

Test Description:
Test 221 - ASIC 0 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x41, Mid 0x93, High 0xC7
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.500, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.875, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail

Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 222 - ASIC 1 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x40, Mid 0x91, High 0xC6
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.500, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.875, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 223 - ASIC 2 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x40, Mid 0x92, High 0xC8
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.500, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.875, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 224 - ASIC 3 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x41, Mid 0x92, High 0xC7
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.500, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.875, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 225 - ASIC 4 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x41, Mid 0x91, High 0xC6
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.500, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.875, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 226 - ASIC 5 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188D

Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x3F, Mid 0x8F, High 0xC3
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.500, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.875, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 227 - ASIC 6 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x40, Mid 0x90, High 0xC4
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.500, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.875, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 228 - ASIC 7 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A

Test Measurement:
Low 0x41, Mid 0x94, High 0xCA
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.500, IC2: 0.000; Temp Check Fail - Abort Test
Ending Temperature (Max 50.00 C):
IC1: 25.875, IC2: 0.000; Temp Check Fail - Abort Test
Test Result:
Fail
Notes:
I2C Communication Error: PCB1 Temp Sensor 0x48

Test Description:
Test 229 - ASIC 0 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x41, Mid 0x94, High 0xC9
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.687, IC2: 25.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.000, IC2: 25.687; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 230 - ASIC 1 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x40, Mid 0x90, High 0xC4
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.687, IC2: 25.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):

IC1: 26.000, IC2: 25.687; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 231 - ASIC 2 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x40, Mid 0x8F, High 0xC3
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.687, IC2: 25.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.000, IC2: 25.687; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 232 - ASIC 3 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x3F, Mid 0x90, High 0xC3
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.687, IC2: 25.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.000, IC2: 25.687; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 233 - ASIC 4 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A

Test Upper Limit:
N/A
Test Measurement:
Low 0x41, Mid 0x92, High 0xC7
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.687, IC2: 25.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.000, IC2: 25.687; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 234 - ASIC 5 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x40, Mid 0x93, High 0xC8
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.687, IC2: 25.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.000, IC2: 25.687; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 235 - ASIC 6 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x40, Mid 0x91, High 0xC6
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.687, IC2: 25.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.000, IC2: 25.687; Temp OK - Pass

Test Result:
Pass

Test Description:
Test 236 - ASIC 7 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x40, Mid 0x90, High 0xC5
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 25.687, IC2: 25.562; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 26.000, IC2: 25.687; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 237 - ASIC 0 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x40, Mid 0x90, High 0xC5
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 26.750, IC2: 26.500; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.000, IC2: 26.625; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 238 - ASIC 1 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:

N/A
Test Measurement:
Low 0x40, Mid 0x92, High 0xC7
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 26.750, IC2: 26.500; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.000, IC2: 26.625; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 239 - ASIC 2 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x40, Mid 0x91, High 0xC5
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 26.750, IC2: 26.500; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.000, IC2: 26.625; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 240 - ASIC 3 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x40, Mid 0x90, High 0xC3
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 26.750, IC2: 26.500; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.000, IC2: 26.625; Temp OK - Pass
Test Result:

Pass

Test Description:
Test 241 - ASIC 4 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x41, Mid 0x94, High 0xC9
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 26.750, IC2: 26.500; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.000, IC2: 26.625; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 242 - ASIC 5 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x3F, Mid 0x96, High 0xCE
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 26.750, IC2: 26.500; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.000, IC2: 26.625; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 243 - ASIC 6 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A

Test Measurement:
Low 0x41, Mid 0x93, High 0xC8
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 26.750, IC2: 26.500; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.000, IC2: 26.625; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 244 - ASIC 7 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x3D, Mid 0x8A, High 0xBD
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 26.750, IC2: 26.500; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.000, IC2: 26.625; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 245 - ASIC 0 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x41, Mid 0x95, High 0xCB
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 27.687, IC2: 27.812; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.812, IC2: 27.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 246 - ASIC 1 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x40, Mid 0x8F, High 0xC3
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 27.687, IC2: 27.812; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.812, IC2: 27.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 247 - ASIC 2 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x43, Mid 0x96, High 0xCF
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 27.687, IC2: 27.812; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.812, IC2: 27.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 248 - ASIC 3 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:

Low 0x40, Mid 0x8E, High 0xC3
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 27.687, IC2: 27.812; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.812, IC2: 27.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 249 - ASIC 4 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x41, Mid 0x94, High 0xC9
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 27.687, IC2: 27.812; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.812, IC2: 27.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 250 - ASIC 5 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x40, Mid 0x92, High 0xC6
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 27.687, IC2: 27.812; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.812, IC2: 27.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 251 - ASIC 6 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x40, Mid 0x91, High 0xC4
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 27.687, IC2: 27.812; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.812, IC2: 27.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 252 - ASIC 7 Calibrate Register Values at 1.0VDC, 2.0VDC, 2.6VDC
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Low 0x40, Mid 0x8E, High 0xC1
Units:
N/A
Starting Temperature (Max 50.00 C):
IC1: 27.687, IC2: 27.812; Temp OK - Pass
Ending Temperature (Max 50.00 C):
IC1: 27.812, IC2: 27.812; Temp OK - Pass
Test Result:
Pass

Test Description:
Test 253 - Write Data to EEPROM
PCB Serial Number:
RBL03W16188D
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Data Write to EEPROM Failed

Units:
N/A
Starting Temperature : N/A
Ending Temperature : N/A
Test Result:
Fail

Test Description:
Test 254 - Write Data to EEPROM
PCB Serial Number:
RBL03W16188C
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Data Write to EEPROM Successful
Units:
N/A
Starting Temperature : N/A
Ending Temperature : N/A
Test Result:
Pass

Test Description:
Test 255 - Write Data to EEPROM
PCB Serial Number:
RBL03W16188B
Test Lower Limit:
N/A
Test Upper Limit:
N/A
Test Measurement:
Data Write to EEPROM Successful
Units:
N/A
Starting Temperature : N/A
Ending Temperature : N/A
Test Result:
Pass

Test Description:
Test 256 - Write Data to EEPROM
PCB Serial Number:
RBL03W16188A
Test Lower Limit:
N/A
Test Upper Limit:

N/A
Test Measurement:
Data Write to EEPROM Failed
Units:
N/A
Starting Temperature : N/A
Ending Temperature : N/A
Test Result:
Fail

Test Parameters:
Test Station="OSP_PCB_FT_01"

[PCB Current]
Set DC Voltage (V)="5.000"
Set DC Current Limit (A)="4.000"
Upper Voltage Limit="5.100"
Lower Voltage Limit="4.900"
Power Off Upper Current Limit="2.300"
Power Off Lower Current Limit="2.100"
Power On Upper Current Limit="2.650"
Power On Lower Current Limit="2.450"
ASIC Loaded Upper Current Limit="3.000"
ASIC Loaded Lower Current Limit="2.700"

[DAC Calibration]
DAC Calibration Tolerance="0.015"
Low Voltage Value="1.000"
Mid Voltage Value="2.000"
High Voltage Value="2.600"

Overtemp Threshold="50.000"

Detector Power On Delay="0.100"

[TLE In/Out]
ASIC Off High Limit="0.100"
ASIC Off Low Limit="-0.100"
ASIC On High Limit="0.700"
ASIC On Low Limit="0.480"
ASIC Bias High Limit="2.800"
ASIC Bias Low Limit="2.500"

[RF Amp & ASIC Test & LED Reset]
Starting Pulse Amplitude (mV)="100.000"
Decreasing Trigger Delta (mV)="10.000"
Pulse Width (ns)="10.000"
Trigger Width Lower Limit (ns)="40.000"
Trigger Width Upper Limit (ns)="60.000"
Number of Acceptable Pulses="1.000"

[File Locations]
Test Report Folder Location="C:\Test Reports"
.tar File Folder Location="C:\Tars"

[Tests to Perform]
PCB Current Test="TRUE"
EEPROM Test="TRUE"

TLE In Test="FALSE"
TLE Out Test="TRUE"
RF Amps & ASICs Test="TRUE"
Reset Test="TRUE"
Calibrate DACs Test="TRUE"

[PCBs to Test]
Test PCB1="TRUE"
Test PCB2="TRUE"
Test PCB3="TRUE"
Test PCB4="TRUE"

[Part Number]
O="10748016"
R="10752680"

[Manufacturer]
A="IES"
B="Jabil"
C="Epic"
D="CV"
Z="Prototype"

[Year]
A="2009"
B="2010"
C="2011"
D="2012"
E="2013"
F="2014"
G="2015"
H="2016"
I="2017"
J="2018"
K="2019"
L="2020"
M="2021"
N="2022"
O="2023"
P="2024"
Q="2025"

[Dogbone]
10748016="standard"
10752680="dogbone"