

飞控板与电机电调

飞控板

1. 微空743V2-AIO-35A

All-in-one飞控，H743VIH6主控，双IMU，2~6S供电，淘宝428元

[微空H743V2 AIO 35A 2-6S蓝鸟 飞控电调一体 支持APM PX4 INAV](#)

2. 微空飞塔

[微空MicoAir H743 Lite H7飞控蓝牙调参支持Ardupilot PX4 BF固件](#)

3. Aitbot H743 AIO 飞控

AIO 飞控，H743，和微空类似，但是价格300元，便宜100多，听说后面会适配PX4固件，可以蹲一下

[Aitbot H743 飞控&45A 电调一体 AIO FPV穿越机飞塔，带蓝牙调参](#)

电机

参考DJI NEO的数据，电池为2S锂电池，桨叶为2.2寸桨叶

目前了解到可能适合的型号有1104，1103，1102，1003，0802，08028等

1. BetaFPV

1.1 BetaFPV LAVA 1104

[淘宝店铺](#) 70~90元左右一个，有7200KV和5500KV两个版本

推荐7200KV版本，3S，适配桨叶为[乾丰2.2寸3叶桨](#)，50%油门单轴升力74g

2.2寸桨叶直径56mm

[淘宝店铺](#)参数

型号	螺旋桨	电压 (V)	油门 (%)	电流 (A)	功率 (W)	推力 (g)	力效 (g/W)
P1104 7200KV	GF 2.2英寸 -3B	12	30	0.51	6.10	29	4.71
		12	40	1.25	15.04	58	3.85
		12	50	2.29	27.51	82	2.99
		12	60	3.49	41.88	105	2.52
		12	70	4.36	52.32	137	2.63
		12	80	5.91	70.88	163	2.30
		12	90	8.17	97.99	192	1.96
		12	100	10.20	122.45	234	1.91

1.2 BetaFPV 1103 (for Aquila20)

[淘宝店铺](#) 单个价60左右，10500KV，推荐桨叶为[GF2218-3桨叶](#) ,和1104是一样的，50%油门单轴升力60g

[官网](#)参数

Model	Propeller	Voltage (V)	Throttle (%)	Current (A)	Thrust (g)	Efficiency (g/w)	Input (W)	Speed (RPM)
C23 P1103-1 0500KV	GF 2218-3	7.94	20	0.29	11	4.86	2.26	11191
		7.93	30	0.80	26	4.03	6.33	16957
		7.92	40	1.62	42	3.31	12.80	21901
		7.91	50	2.66	60	2.85	21.04	26154
		7.90	60	3.85	80	2.63	30.43	30416
		7.88	70	5.16	97	2.39	40.63	33674
		7.87	80	6.57	113	2.19	51.66	36610
		7.85	90	8.10	128	2.01	63.57	39019
		7.82	100	9.90	142	1.83	77.47	41219

还有另外一款，[链接](#)，参数没找到，感觉差不多

1.3 BetaFPV LAVA 1102


[淘宝店铺](#) 单个价格80左右，14000KV，推荐桨叶为[1611-3](#)（50%油门单轴升力47.76g）或[1608-3](#)（50%油门升力46.31g），1.6寸桨叶直径40mm

带着全包桨保的大小大约100mm* 100mm

[官网](#) 参数

Load Performance									
Model	Propeller	Voltage (V)	Throttle (%)	Current (A)	Speed (RPM)	Thrust (g)	Efficiency (g/w)	Input (W)	Coil temp (°C)
LAVA 1102 14000KV	GF 1611 -3P	8	10	0.17		3.15	2.33	1.35	
		8	20	0.55		11.04	2.53	4.36	
		8	30	1.16		21.58	2.34	9.24	
		8	40	2.02		33.92	2.10	16.18	
		8	50	3.01		47.76	1.98	24.09	
		8	60	4.17		62.98	1.89	33.36	
		8	70	5.35		78.30	1.83	42.80	
		8	80	6.79		95.20	1.75	54.34	
		8	90	8.55		113.30	1.66	68.36	
		8	100	10.51		129.52	1.54	84.10	
	GF 1608 -3P	8	10	0.16		2.70	2.18	1.24	
		8	20	0.52		9.83	2.38	4.14	
		8	30	1.08		20.03	2.32	8.63	
		8	40	1.91		32.31	2.12	15.25	
		8	50	2.86		46.31	2.02	22.89	
		8	60	3.99		62.05	1.94	31.94	
		8	70	5.22		78.24	1.87	41.78	
		8	80	6.65		95.21	1.79	53.18	
		8	90	8.42		113.08	1.68	67.36	
		8	100	10.43		129.69	1.55	83.43	
Remark	The above data represents the test samples only.								

[淘宝店铺](#) 参数

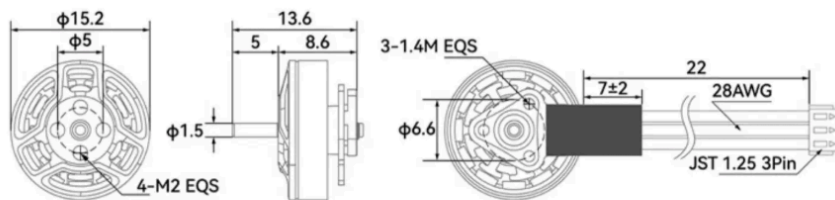

型号	螺旋桨	电压 (V)	油门 (%)	电流 (A)	功率 (W)	推力 (g)	力效 (g/W)
LAVA 1102 14000KV	GF 1611-3	8	10	0.17	1.35	3.15	2.33
			20	0.55	4.36	11.04	2.53
			30	1.16	9.24	21.58	2.34
			40	2.02	16.18	33.92	2.10
			50	3.01	24.09	47.76	1.98
			60	4.17	33.36	62.98	1.89
			70	5.35	42.80	78.30	1.83
			80	6.79	54.34	95.20	1.75
			90	8.55	68.36	113.30	1.66
			100	10.51	84.10	129.52	1.54
	GF 1608-3		10	0.16	1.24	2.70	2.18
			20	0.52	4.14	9.83	2.38
			30	1.08	8.63	20.03	2.32
			40	1.91	15.25	32.31	2.12
			50	2.86	22.89	46.31	2.02
			60	3.99	31.94	62.05	1.94
			70	5.22	41.78	78.24	1.87
			80	6.65	53.18	95.21	1.79
			90	8.42	67.36	113.08	1.68
			100	10.43	83.43	129.69	1.55

1.4 BetaFPV 0802

3个版本，均推荐1.6寸桨叶，50%油门单轴升力分别为18g，22.9g，24.2g
(拉力好低，感觉只能当玩具)



Load Performance								
Model	Propeller	Voltage (V)	Throttle (%)	Current (A)	Thrust (g)	Efficiency (g/w)	Input (W)	Speed (RPM)
Champion 0802 - 28000KV	GF 1614 -3P	3.93	20	0.45	4.1	2.33	1.76	12533
		3.92	30	1.17	10	2.19	4.58	19627
		3.90	40	2.11	17.2	2.08	8.25	25700
		3.89	50	3.06	24.2	2.03	11.91	30500
		3.88	60	4.04	31	1.98	15.67	34632
		3.86	70	5.16	38.5	1.93	19.94	38552
		3.85	80	6.35	45.7	1.87	24.42	42097
		3.83	90	7.52	51.8	1.80	28.82	45134
		3.81	100	9.00	58.2	1.70	34.30	47888
Racing 0802 - 25000KV	GF 1614 -3P	3.93	20	0.40	3.4	2.19	1.55	11977
		3.92	30	1.03	9.5	2.35	4.04	19704
		3.91	40	1.86	16.3	2.25	7.26	25026
		3.90	50	2.70	22.9	2.17	10.53	29812
		3.88	60	3.58	29.6	2.13	13.89	33859
		3.87	70	4.56	36.8	2.08	17.65	37678
		3.86	80	5.66	43.3	1.98	21.84	41072
		3.84	90	6.75	49.2	1.89	25.98	43874
		3.82	100	8.15	55	1.77	31.15	46481
Freestyle 0802 - 22000KV	GF 1614 -3P	3.93	20	0.27	2.3	2.21	1.04	10080
		3.92	30	0.69	7.1	2.63	2.70	16629
		3.92	40	1.25	12.4	2.53	4.90	22122
		3.91	50	1.87	18	2.46	7.31	26640
		3.90	60	2.48	24	2.48	9.67	30692
		3.89	70	3.18	29.9	2.42	12.36	34253
		3.88	80	3.96	36.3	2.36	15.36	37649
		3.87	90	4.76	41.7	2.26	18.43	40563
		3.86	100	5.90	47.7	2.10	22.73	43292
Remark	The above data represents the test samples only.							

致盈动力 RC-IN-Power

致盈 1003

GTS V3 1003-10000KV



Technical Datas	
KV	10000
Configu-ration	9N12P
Stator Diamter	10mm
Stator Length	3mm
Shaft Diameter	1.5mm
Motor Dimension(Dia.*Len)	Φ 13.5*9.2mm
Weight(g)	3.45(5cm wire)
Idle current(5)@5V(A)	0.8
No.of Cells(Lipo)	1~2S
Max Continuous Power(W)3S	85
Internal Resistance	162mΩ
Max Current(3S)	11.5A
Max.Efficiency Current	(1-3A)>85%



Prop (inch)	Voltages (V)	Throttle (%)	Load Currenry (A)	Pull(g)	Power(W)	Efficiency(g/W)	Temperature(in full throttle load 3's)
GF1608R*3	7.4	50%	1.4	44	10.4	4.247	58℃
		100%	5.7	103	42.2	2.442	
GF1609R*4	7.4	50%	1.5	48	11.1	4.324	63℃
		100%	6.3	113	46.6	2.424	
GF1635R*3	7.4	50%	1.4	45	10.4	4.344	58℃
		100%	5.7	105	42.2	2.489	
GF1635R*4	7.4	50%	1.7	52	12.6	4.134	63℃
		100%	6.3	113	46.6	2.424	
GF2015R*2	7.4	50%	1.7	60	12.6	4.769	67℃
		100%	7	135	51.8	2.606	
GF2023R*3	7.4	50%	2.5	63	18.5	3.405	80℃
		100%	10.2	127	75.5	1.683	
EMAX2035*4	7.4	50%	3.2	67	23.7	2.829	81℃
		100%	10.8	132	79.9	1.652	
GF45mm*2	7.4	50%	1.4	47	10.4	4.537	60℃
		100%	5.8	114	42.9	2.656	
GF45mm*3	7.4	50%	1.7	56	12.6	4.452	67℃
		100%	7	125	51.8	2.413	
GF65mm*2	7.4	50%	2.3	65	17.0	3.819	77℃
		100%	9	153	66.6	2.297	
■ Airplane			□ Helicopter			■ Vtol	

GTS V3 1003-14000KV


Technical Datas	
KV	14000
Configu-ration	9N12P
Stator Diamter	10mm
Stator Length	3mm
Shaft Diameter	1.5mm
Motor Dimension(Dia.*Len)	Φ 13.5*9.2mm
Weight(g)	3.45(5cm wire)
Idle current(5)@5V(A)	0.9
No.of Cells(Lipo)	1~2S
Max Continuous Power(W)3S	76.2
Internal Resistance	99mΩ
Max Current(3S)	10.3A
Max.Efficiency Current	(1-3A)>85%



Prop (inch)	Voltages (V)	Throttle (%)	Load Currency (A)	Pull(g)	Power(W)	Efficiency(g/W)	Temperature(in full throttle load 3's)
GF1608R*3	7.4	50%	2.2	59	16.3	3.624	58℃
		100%	8.4	139	62.2	2.236	
GF1609R*4	7.4	50%	2.3	65	17.0	3.819	63℃
		100%	9.3	152	68.8	2.209	
GF1635R*3	7.4	50%	2.2	60	16.3	3.686	58℃
		100%	8.5	141	62.9	2.242	
GF1635R*4	7.4	50%	2.6	70	19.2	3.638	63℃
		100%	9.4	152	69.6	2.185	
GF45mm*2	7.4	50%	2.2	63	16.3	3.870	60℃
		100%	8.6	153	63.6	2.404	
GF45mm*3	7.4	50%	2.6	75	19.2	3.898	67℃
		100%	10.3	168	76.2	2.204	
■ Airplane			□ Helicopter			■ Vtol	

GTS V3 1003-18000KV

Technical Datas	
KV	18000
Configu-ration	9N12P
Stator Diamter	10mm
Stator Length	3mm
Shaft Diameter	1.5mm
Motor Dimension(Dia.*Len)	Φ 13.5*9.2mm
Weight(g)	3.45(5cm wire)
Idle current(5)@5V(A)	1.3
No.of Cells(Lipo)	1S
Max Continuous Power(W)3S	54
Internal Resistance	68mΩ
Max Current(3S)	14.6A
Max.Efficiency Current	(1-3A)>85%

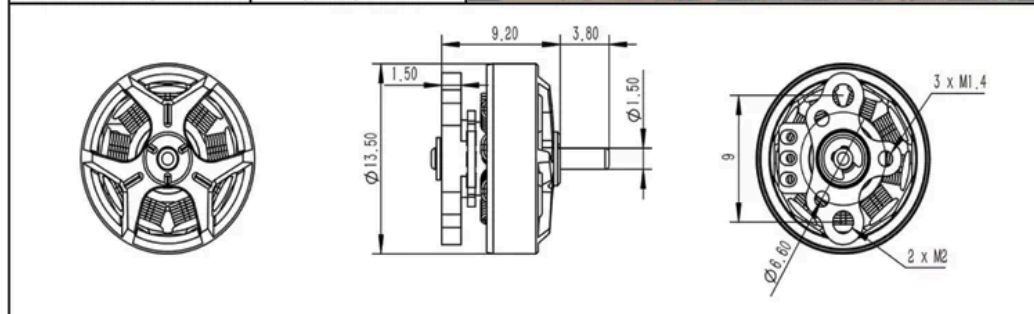


Prop (inch)	Voltages (V)	Throttle (%)	Load Currency (A)	Pull(g)	Power(W)	Efficiency(g/W)	Temperature(in full throttle load 3's)
GF1608R*3	3.7	50%	2.5	36	9.3	3.892	63℃
		100%	8.7	87	32.2	2.703	
GF1609R*4	3.7	50%	2.3	41	8.5	4.818	67℃
		100%	9.7	94	35.9	2.619	
GF1635R*3	3.7	50%	2.3	37	8.5	4.348	63℃
		100%	8.7	87	32.2	2.703	
GF1635R*4	3.7	50%	2.6	43	9.6	4.470	67℃
		100%	9.7	95	35.9	2.647	
GF2015R*2	3.7	50%	3	50	11.1	4.505	70℃
		100%	10.8	107	40.0	2.678	
GF2023R*3	3.7	50%	3.9	53	14.4	3.673	82℃
		100%	14.6	98	54.0	1.814	
GF45mm*2	3.7	50%	2.5	40	9.3	4.324	64℃
		100%	8.9	95	32.9	2.885	
GF45mm*3	3.7	50%	2.9	47	10.7	4.380	70℃
		100%	10.8	104	40.0	2.603	
■ Airplane			□ Helicopter			■ Vtol	

GTS V3 1003-22000KV

Technical Datas	
KV	22000
Configu-ration	9N12P
Stator Diamter	10mm
Stator Length	3mm
Shaft Diameter	1.5mm
Motor Dimension(Dia.*Len)	Φ 13.5*9.2mm
Weight(g)	3.45(5cm wire)
Idle current(5)@5V(A)	1.5
No.of Cells(Lipo)	1S
Max Continuous Power(W)3S	67
Internal Resistance	46mΩ
Max Current(3S)	18.1A
Max.Efficiency Current	(1-3A)>84%



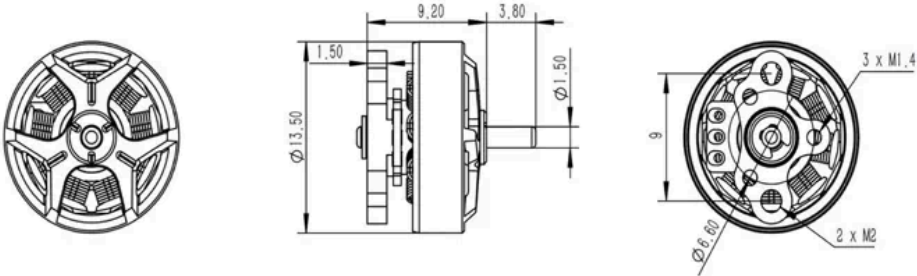

Prop (inch)	Voltages (V)	Throttle (%)	Load Currency (A)	Pull(g)	Power(W)	Efficiency(g/W)	Temperature(in full throttle load 3's)
GF1608R*3	3.7	50%	3.1	43	11.5	3.749	66℃
		100%	10.8	102	40.0	2.553	
GF1609R*4	3.7	50%	2.8	48	10.4	4.633	70℃
		100%	12	111	44.4	2.500	
GF1635R*3	3.7	50%	2.8	44	10.4	4.247	66℃
		100%	10.8	103	40.0	2.578	
GF1635R*4	3.7	50%	3.3	51	12.2	4.177	70℃
		100%	12	112	44.4	2.523	
GF2015R*2	3.7	50%	3.8	59	14.1	4.196	73℃
		100%	13.3	126	49.2	2.560	
GF2023R*3	3.7	50%	4.8	62	17.8	3.491	85℃(HOT)
		100%	18.1	115	67.0	1.717	
GF45mm*2	3.7	50%	3.1	47	11.5	4.098	67℃
		100%	11	112	40.7	2.752	
GF45mm*3	3.7	50%	3.6	56	13.3	4.204	73℃
		100%	13.3	123	49.2	2.499	
■ Airplane			□ Helicopter			■ Vtol	

Crazyflie

开源科研无人机

Crazyflie 08028 1000KV

浙大高飞实验室和鸡蛋一样大小的无人机所使用的电机

找不到参数，[官网](#) 说单轴最大拉力40g，超级贵，[淘宝购买链接](#)
使用2.2寸两叶桨