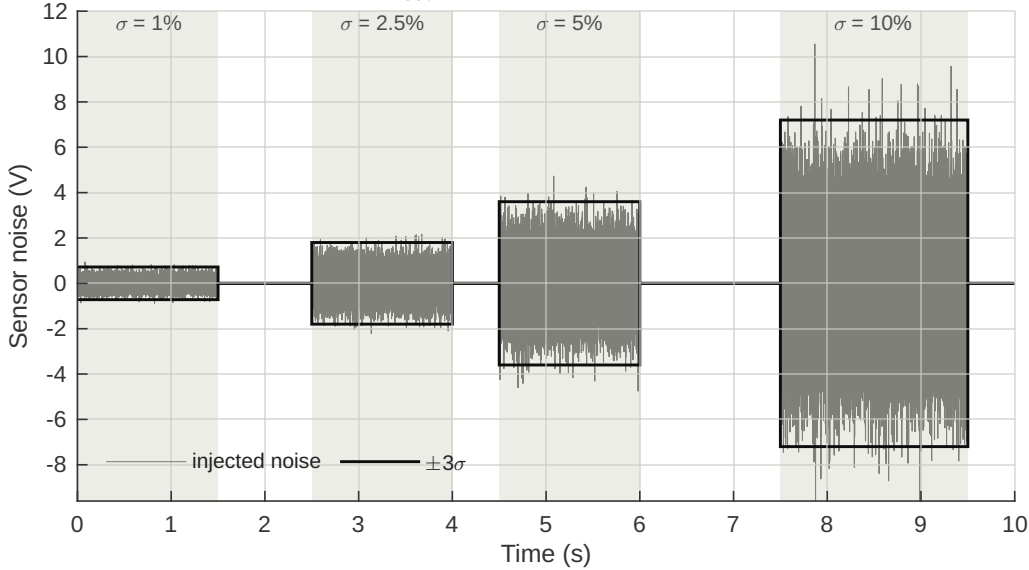

Sensor noise added to the measured V_{out} (Gaussian, new sample every 0.1 ms, same for all controllers)
σ = 1%
σ = 2.5%
σ = 5%
σ = 10%
injected noise
±3σ
Sensor noise (V)
Time (s)
12
10
8
6
4
2
0
-2
-4
-6
-8
0
1
2
3
4
5
6
7
8
9
10