

FOLS Guangzhou Fols Valve Technology Co., Ltd.

Add: No.53 Ruihua first road, 89-109 Chebei Street, Dongpu, Tianhe District, 511660 Guangzhou City, China

Email: sales1@folshk.com Mobile: 86-18244906163 Web: <http://www.folsv.com/>

Quotaion

Item	Product Picture	DN (mm)	Electric Actuator	Main Specification	Quantity (PCS)	EXW USD Unit Price	EXW USD Total Price
FLD971XS-10		2" DN50	FOSD-05E	220VAC 4-20mA RS485 Modulating type UPVC electric butterfly valve (Material: Body:UPVC, Disc:UPVC, Seal:EPDM PN:16)	1	\$134.00	\$134.00
/		2" DN50 63mm	/	UPVC flange and gaskets	2	\$8.00	\$16.00
Total cost in USD					3	\$150.00	

Detail specification:

FLD971XS-10

Electric plastic butterfly valve

	NO.	Part Names	Material
	1	Valve body	UPVC
	2	Seat sealing	EPDM、FPM
	3	Valve Disc	UPVC
	4	Bolted	STEEL
	5	Stem	STEEL、304
	6	Spacer	1Cr18Ni9Ti
	7	O sealing ring	EPDM、FPM
	8	Actuator	FOSD series

Product description

Electric plastic butterfly valve is characterized by light weight, easy installation, strong corrosion resistance, it is widely used in water supply industry. it earns good reputation in market.

PVC electric butterfly valve, light weight, corrosion resistance which is used in many fields, such as general water and raw piping systems, drainage and sewage piping systems, salt water and sea water piping system, pH and chemical solution system and other industries. The quality is approved the majority of users.


Features

1. Operating temperature range: -40°C-+95°C.
2. With excellent strength and toughness.
3. With excellent chemical resistance capabilities.
4. Retardant properties is the self-extinguishing.
5. Low thermal conductivity, about 1/200 of the steel.
6. The content of heavy ion in the medium up to the ultrapure water standards.
7. Health indicators in line with national health standards
8. Clean and smooth of the Tube wall, which can generate a smaller friction and adhesion when transferring fluid.
9. Light weight, the equivalent of 1/5 of steel, 1/6 of Brass.
10. Easy to install.
11. Excellent anti-aging and UV resistance, so that there is a great extension of the normal useful life than other piping systems.

Technical parameters

Nominal diameter DN(mm)	DN50-DN300
End connection	Water
Body material	PVC(-10°C-+70°C)
Spool material	PVC(-10°C-+70°C)
Sealing material	PTFE、EPDM、 NBR
Applicable medium	PVC chemical solvent compatible food industry

PVC electric butterfly valve connecting dimension

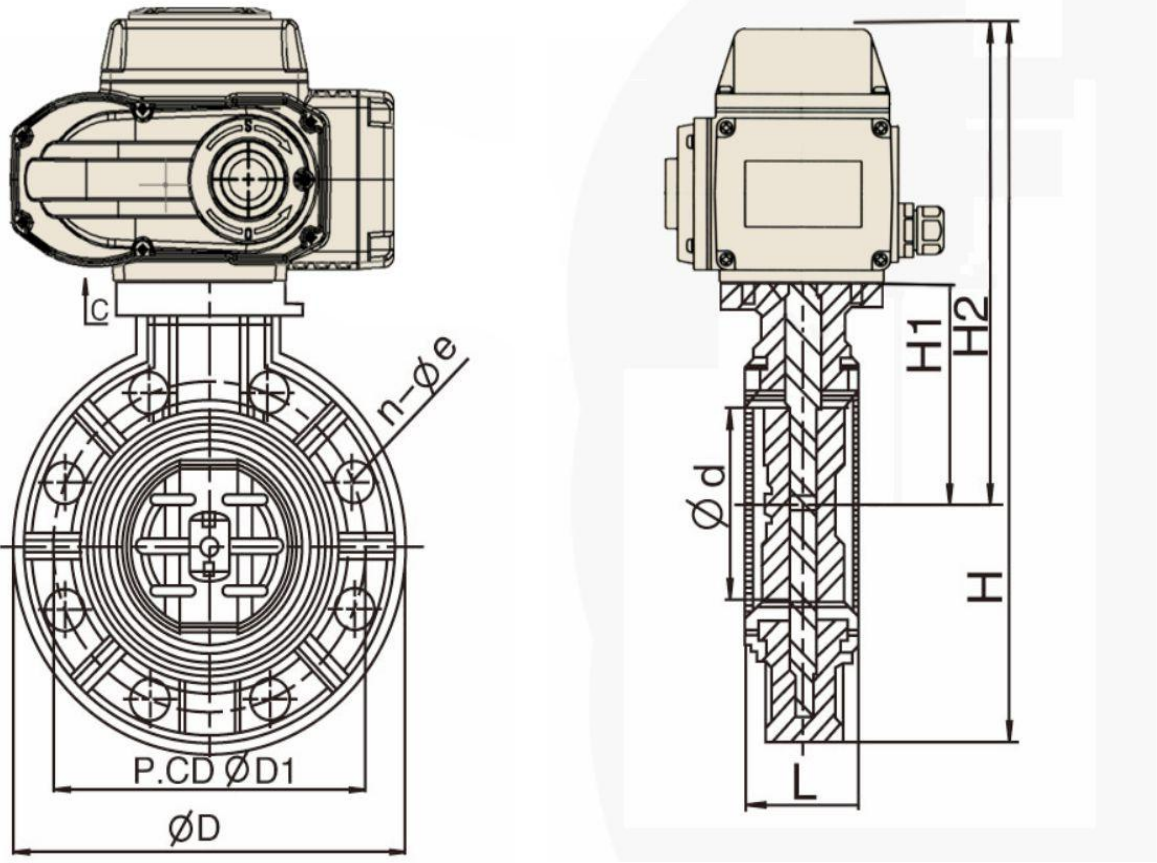


SIZE	"	2"	2 1/2"	3"	4"	5"	6"	8"
	DN	65	65	80	100	125	150	200
$\varnothing D$		160	180	196	228	258	287	344
P.C.D. $\varnothing D1$	DIN	125	145	160	180	210	240	295
	ANSI	121	140	152	191	216	241	298
	JIS	120	140	150	175	210	240	290
$\varnothing d$		48	63	78	98	122	146	199
L		43	46	49	54	64	70	88
$\varnothing 1$		124	124	124	124	170	170	170
L1		190	190	240	240	310	310	310
W		55	55	55	55	72	72	72
H1		100	112	120	140	168	181	215
H2		186	198	215	237	266	282	323
H		266	278	295	380	352	382	452
n- $\varnothing e$	DIN	4-19	4-19	8-19	8-19	8-19	8-23	8-23
	JNS	4-19	4-19	4-19	8-19	8-19	8-23	8-23
	JIS	4-19	4-19	8-19	8-19	8-19	8-23	8-23
PIS		150	150	150	150	150	150	100
Mpa		1	1	1	1	1	1	0.6

Performance electric actuator

Items Parameter	FOSD-05E	FOSD-10E	FOSD-16E	FOSD-30E	FOSD-60E	FOSD-125E	FOSD-250E	FOSD-400E
Output torque	50Nm	100Nm	160Nm	300Nm	600Nm	1250Nm	2500Nm	4000Nm
Rated travel time	20S	15S/30S			30S	100S	100S	100S
Rotation angle	0°-90°	0°-90°	0°-90°	0°-90°	0°-90°	0°-90°	0°-90°	0°-90°
Working current	0.25A	0.48A	0.68A	0.8A	1.2A	2A	2A	2.7A
Starting power	0.25A	0.48A	0.72A	0.86A	1.38A	2.3A	2.3A	3A
Motor power	10W/F	25W/F	30W/F	40W/F	90W/F	100W/F	120W/F	140W/F
Weight	3kg	5kg	5.5kg	8kg	8.5kg	15kg	15.5kg	16kg
Power	AC220V, AC24V, AC110V , AC380, DC24V , DC12V (choose options)							
Input signal	4-20mADC		1-5VDC		0-10 VDC			
Output signal	4-20mADC		1-5VDC		0-10 VDC			
Intrinsic error	At most ±0.5%							
Return difference	less than 0.3%							
Dead band	0.1%-1.6 adjustable							
Damping characteristics	Zero							
Repeatability error	0%							

Remarks: operating time means the travel time of adjusting the adjustable range
rotation angle means from 0° to 90°

Pilot circuit

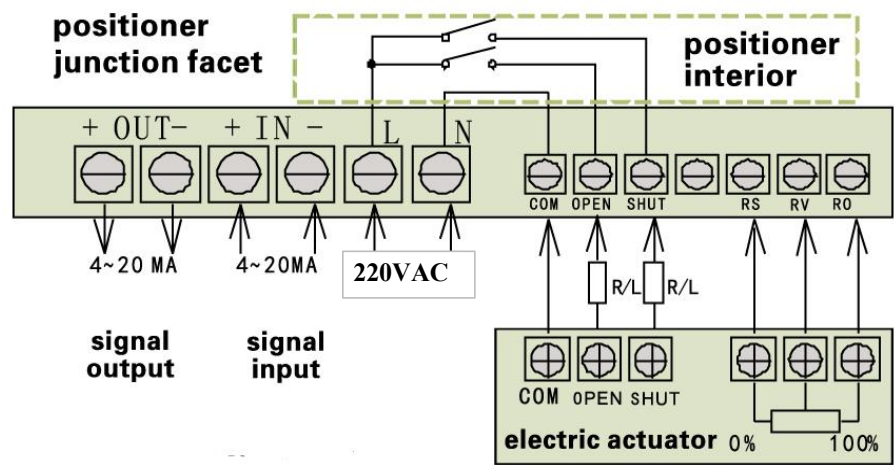



Pictures

