



HOME

ABOUT

PRODUCTS

APPLICATION

PRODUCTION

SUPPORT

NEWS

CONTACT

Language



Wholesale Regular Model 3-Way Solenoid Actuator

We are committed to providing our customers with high-quality products and services that will fulfill your business, going on rich together!

Home / Products / Solenoid Actuator / 3-Way Solenoid Actuator / Regular Model 3-Way Solenoid Actuator





3-Way Solenoid Actuator

Regular Model 3-Way Solenoid Actuator

General Description

IrriRich 3 way solenoid is used to control the open and close of the various low flow irrigation water valves.

When assembled with the irrigation controller, it can achieve the automatic control of the waterworks system with timing and rationing.

An efficient design makes it possible to achieve high pressures with a low inrush and holding current and wide voltage range.

Specification

Voltage: 24VAC, 24VDC, 12VDC

Allowed deviation from voltage: ±10%

Insulation Grade: 500V/min.

Pressure testing: 0-10BAR,one minute, no leakage

Base connection: 3/4"20 UNEF male threaded

Protection: IP66

Temperature range

Ambient Temp: Max 60 °C

Fluid Temp: Max 80 °C

Material: Housing: Coated Metal

Plunger and Pole: Passivated Stainless iron

Rubber Seal: NBR or EPDM

Encapsulate: Epoxy

[Get A Free Quote](#)

PREV: LATCH 3-Way Solenoid Actuator LATCH

NEXT: No next article

Technical Specifications


Operator Type	Wires Color	Model Number	Frequency	Current (A)	
				Inrush	Holding
3w N.O. 24VAC	Red / Brown	3W-D-NO-24VAC	50 Hz	0.15	1.15
			60 Hz	0.14	1.14
3w N.C. 24VAC	Red/ Blue	3W-D-NC-24VAC	50 Hz	0.17	1.17
			60 Hz	0.16	1.16

3w-R-N.O. 24VAC	Red	3W-R-NO-24VAC	50 Hz	0.5	0.25
			60 Hz	0.42	0.18
3w N.O. 24VDC	Black	3W-D-NO-24VDC		0.12	0.12
3w N.O. 12VDC	Blue	3W-D-NO-12VDC		0.28	0.28

Application



Dimensions

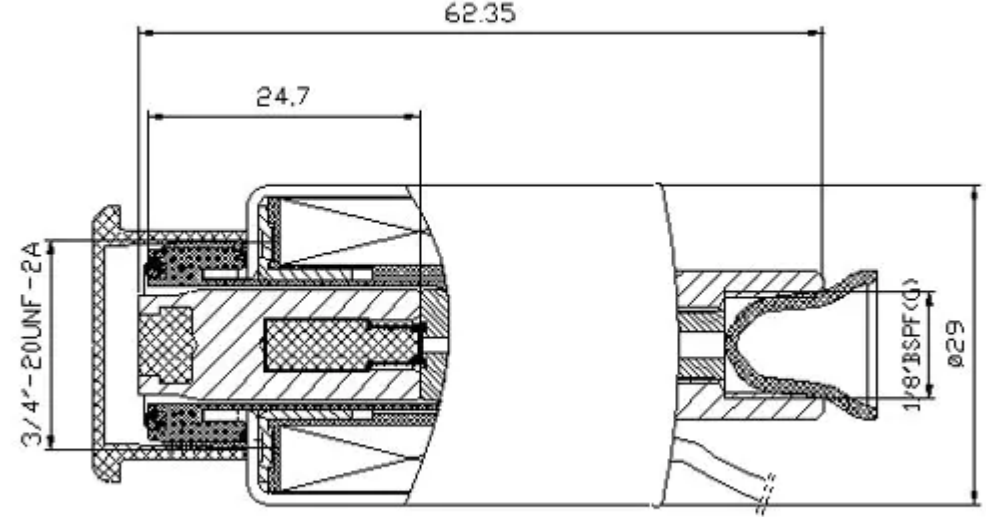

81mm

1/8\" data-bbox="885 270 915 295"/>

Related Series



Solenoid series LATCH 2-Way Solenoid Actuator LATCH



Regular Model 3-Way Solenoid Actuator



LATCH 3-Way Solenoid Actuator LATCH

About