

1. Description


1.1. Project

Project Name	BlinkTest
Board Name	No information
Generated with:	STM8CubeMX 1.5.0
Date	06/28/2025

1.2. MCU

MCU Series	STM8S
MCU Line	STM8S103/105
MCU name	STM8S103F3Px
MCU Package	TSSOP20
MCU Pin number	20

2. Pinout Configuration

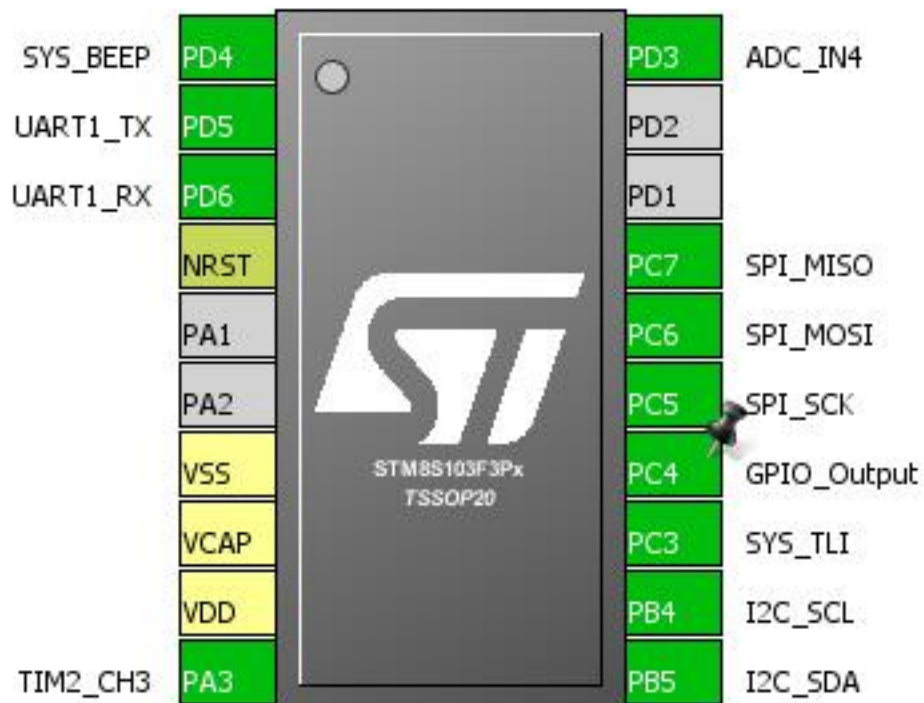


3. Pins Configuration

Pin Number TSSOP20	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	PD4	I/O	SYS_BEEP	
2	PD5	I/O	UART1_TX	
3	PD6	I/O	UART1_RX	
4	NRST	Reset		
7	VSS	Power		
8	VCAP	Power		
9	VDD	Power		
10	PA3	I/O	TIM2_CH3	
11	PB5	I/O	I2C_SDA	
12	PB4	I/O	I2C_SCL	
13	PC3	I/O	SYS_TLI	
14	PC4 *	I/O	GPIO_Output	
15	PC5	I/O	SPI_SCK	
16	PC6	I/O	SPI_MOSI	
17	PC7	I/O	SPI_MISO	
20	PD3	I/O	ADC_IN4	

* The pin is affected with an I/O function

4. Clock Tree Configuration

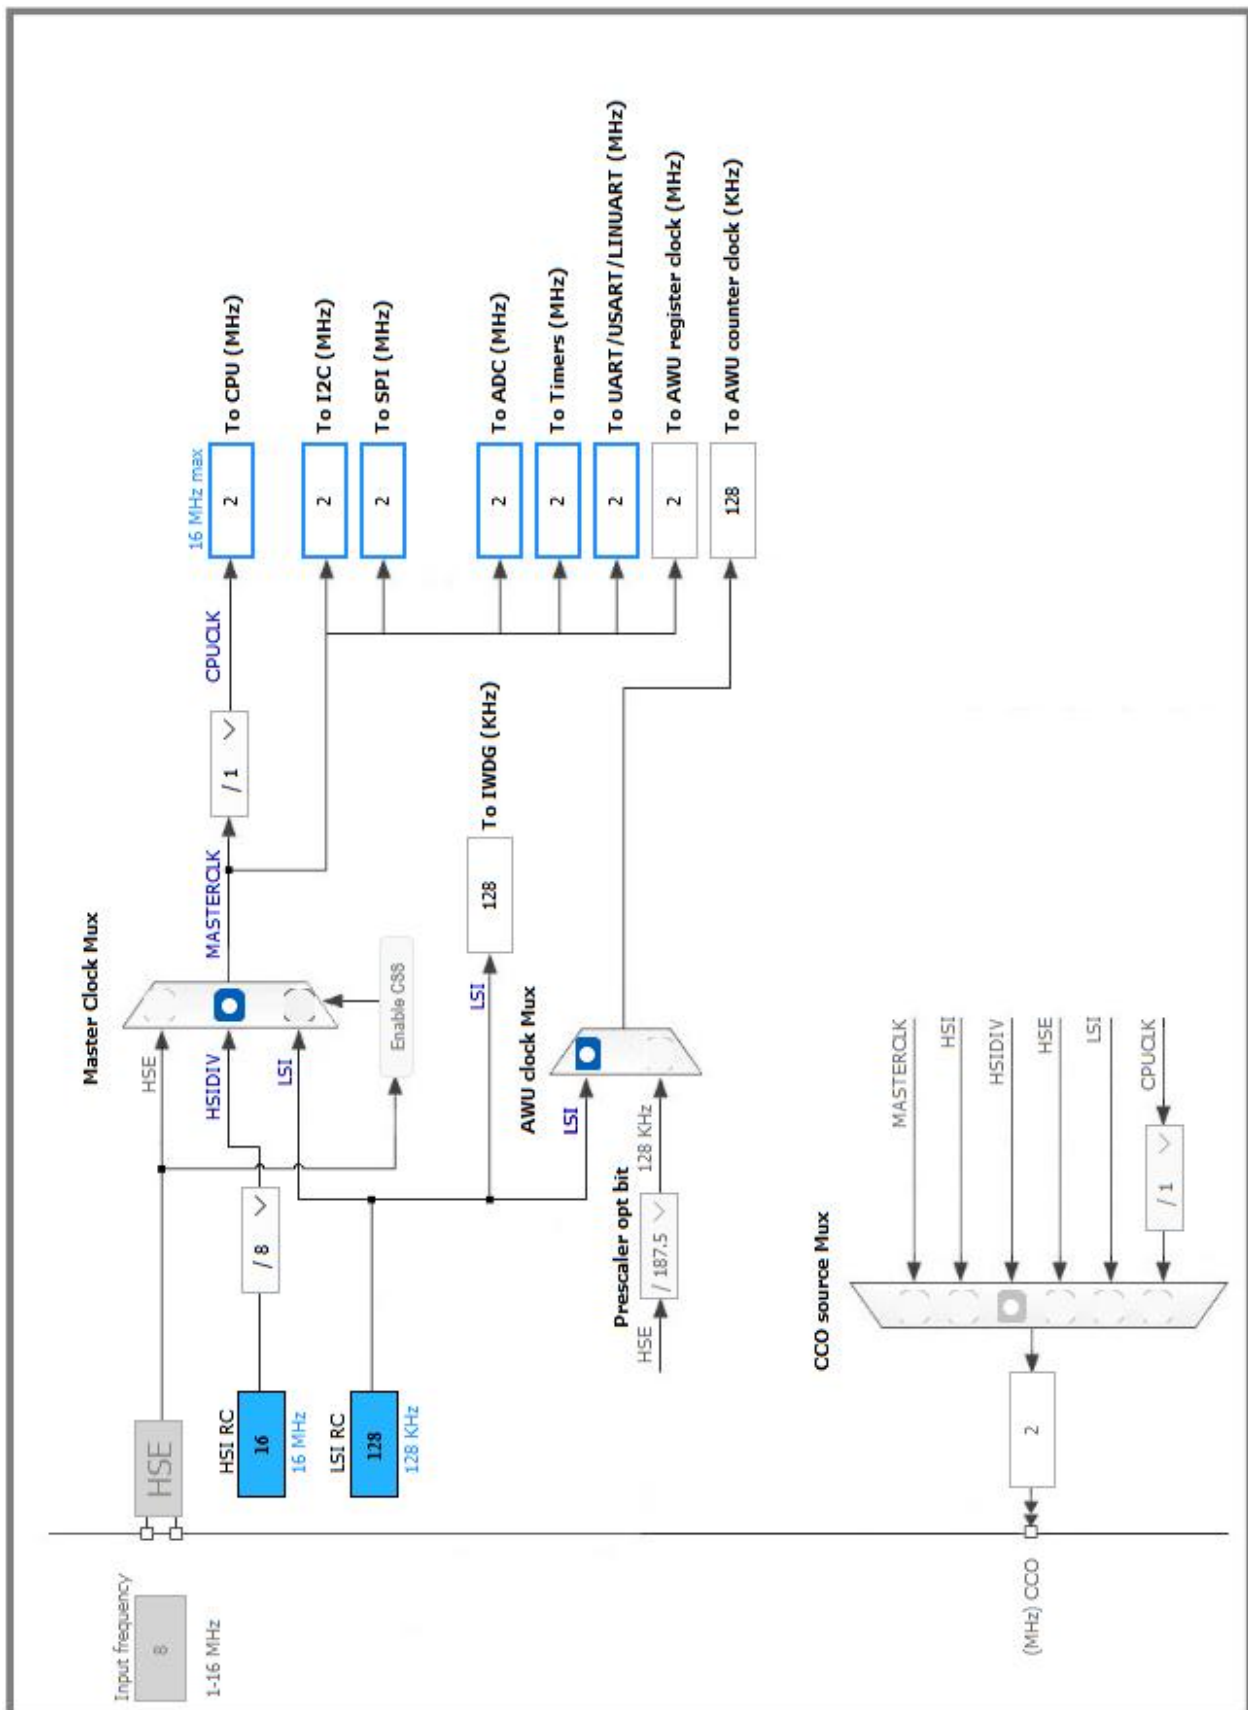

5. Power Consumption Calculator report

5.1. Microcontroller Selection

Series	STM8S
Line	STM8S103/105
MCU	STM8S103F3Px
Datasheet	15441 Rev13

5.2. Parameter Selection

Temperature	25
Vdd	null