TADIRAN NEW ENERGY

DMxxxM10T-B72HSW

Module Specification

Cell Type	N type Mono-crystalline, 144(6×24)
Dimensions (mm)	2278×1134×30
Weight (kg)	31.8
Front Cover	2mm heat strengthened glass, Anti-reflective coating
Rear Cover	2mm heat strengthened glass
Junction Box	3 Diodes, IP68 according to IEC 62790
Output Cables (Including Connector)	4mm²/Portrait: 300mm (+)/200mm(-) Landscape: 1350mm(+)/1350mm(-) Length can be customized
Connector Type	PV-ZH202B or MC4-EVO 2A(1500V)

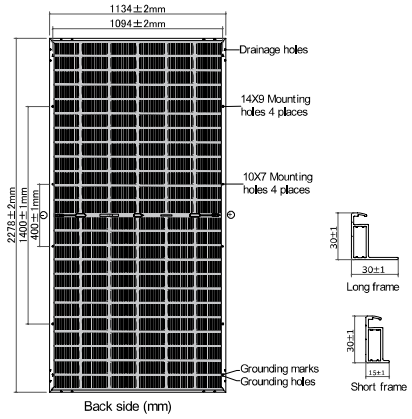

Electrical Specifications[1]

Module Type	DM580M10T-B72HSW		DM585M10T-B72HSW		DM590M10T-B72HSW		DM595M10T-B72HSW		DM600M10T-B72HSW	
Testing Condition	STC[2]	NMOT[3]	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (Pmax/W)	580	436	585	440	590	444	595	448	600	452
Maximum Power Current (Imp/A)	13.24	10.64	13.30	10.69	13.36	10.74	13.42	10.79	13.47	10.83
Maximum Power Voltage (Vmp/V)	43.85	41.00	44.04	41.18	44.23	41.36	44.42	41.54	44.61	41.72
Short-circuit Current (Isc/A)	13.99	11.33	14.05	11.38	14.11	11.43	14.17	11.48	14.23	11.53
Open-circuit Voltage (Voc/V)	52.50	49.43	52.70	49.62	52.90	49.81	53.10	50.00	53.30	50.19
Module Efficiency STC (%)	22.5		22.6		22.8		23.0		23.2	

[1] Measurements according to IEC 60904-3, Measurement tolerance: Isc: ±4%, Voc: ±3%, Test uncertainty for Pmax: ±3%, Bifaciality: 80%±5%
[2] STC (Standard Test Condition): Radiation 1000W/m², Module temperature 25°C, AM=1.5
[3] NMOT: Radiation 800W/m², Ambient temperature 20°C, AM=1.5, Wind Speed 1m/s

Electrical Specifications[1](BNPI[2])

Nameplate Power (W)	580	585	590	595	600
Maximum Power (Pmax/W)	641	647	652	658	663
Maximum Power Current (Imp/A)	14.61	14.67	14.74	14.81	14.86
Maximum Power Voltage (Vmp/V)	43.90	44.09	44.28	44.47	44.66
Short-circuit Current (Isc/A)	15.39	15.46	15.52	15.59	15.66
Open-circuit Voltage (Voc/V)	52.51	52.71	52.91	53.11	53.31

[1] Measurements according to IEC 60904-3, Measurement tolerance: Isc: ±4%, Voc: ±3%, Test uncertainty for Pmax: ±3%
[2] BNPI: Front radiation 1000W/m², Rear radiation 135W/m², Module temperature 25°C, AM=1.5

Operating Conditions

Operating Temperature (°C)	-40 to +85
Maximum System Voltage (V)	1500 DC(IEC)
Overcurrent Protection Rating (A)	30
Power Output Tolerance (%)	0~3
Protection Class	Class II
Max. Test Load, Push/Pull (Pa)	Front 5400 / Back 2400
Max. Design Load, Push/Pull (Pa)	Front 3600 / Back 1600

Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42±2°C
Temperature Coefficient of Pmax (%/°C)	-0.29
Temperature Coefficient of Voc (%/°C)	-0.25
Temperature Coefficient of Isc (%/°C)	+0.048

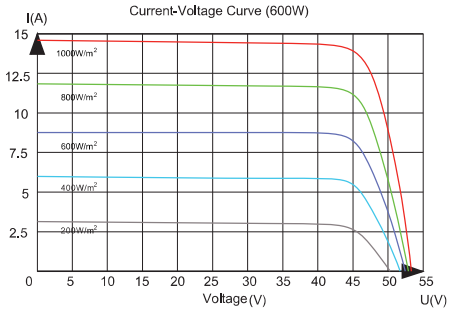

Packaging

Container	40HQ
Pallet Dimensions (mm)	2320×1140×1250
Pieces per Pallet	36
Pieces per Container	720

New Life. New Energy.

office@tadiran-solar.co.il | 08-9715235 תדיראן סולאר