

TECHNICAL SPECIFICATIONS

Input	Satellite	Terrestrial
Modulation	DVB-S/S2	DVB-T/T2/C
Frequency range	950...2150 MHz	42...1002 MHz
Level	50...90 dBμV	55...95 dBμV
Compliance	DVB-S (EN 300 421) DVB-S2 (EN 302 307-1)	DVB-T/T2 (EN 300 744) DVB-C (EN 300 429)

CI processing	
PCMCIA slots	8 / 0

TS processing	
TS stuffing, SI-Table/NIT handling, PID remapping	

RF-Output	
Output frequency increments	110 ... 862 MHz(COOFDM); 50 ... 862 MHz(QAM)
Output level	70...100 dBμV
Number of channels	16 (4 blocks of 4 channels)
Return loss	14 dB (45 MHz), 1,5 dB/octave > 10 dB)
Output attenuation	0...15 dB (1 db increments)

General data	
Supply voltage	110...240 V (50/60 Hz)
Dimensions (WxHxD)	483 x 451 x 44 mm
Power consumption	max. 35W
Operating temperature range	5...45 °C

QAM processing	
Konstellation	64-, 256- QAM
Symbolrate	4,45...7,20 Mbaud
MER	>40 db

COFDM processing	
Constellation	QPSK, 16-, 64-QAM
FEC	1/2, 2/3, 3/4, 5/6, 7/8
Guard interval	1/8, 1/16, 1/32
FFT mode	2k, 8k
MER	>40 db

Streaming Output	
IP-Outputs	up to 256x SPTS
IP-Output Protocol	UDP/RTP/Unicast & Multicast
IP-TS-Format	SPTS VBR1
IP-Pakage Format	MPEG via UDP/IP & RTP/IP
IP-Package Size	188*7 Byte
SAP (Session Announcement Protocol)	Yes
Data rate	1Gbps (Net 768 Mbps)

Model	Reception standard	Inputs		Input Channels		CI Slots	Output Signals	
		SAT	TERR	SAT	TERR		DVB-C/T	SPTS
GF10 12816	DVB-S/S2	8	-	12	-	8	16	-
GF10 12016	DVB-S/S2	8	-	12	-	-	16	-
GF10 06408	DVB-S/S2	4	-	6	-	4	8	-
GF10 06008	DVB-S/S2	4	-	6	-	-	8	-
GF20 128S	DVB-S/S2	8	-	12	-	8	-	256
GF20 120S	DVB-S/S2	8	-	12	-	-	-	256
GF21 128S	DVB-T/T2/C	-	3	-	12	8	-	256
GF21 120S	DVB-T/T2/C	-	3	-	12	-	-	256

WISI is entitled to modify the products or specifications contained in this document at any time and without prior notice. WISI is a brand of WISI Communications GmbH & Co. KG in Germany and other countries, and the WISI logo is a registered trademark of WISI Communications GmbH & Co. KG in Germany and other countries. You can find a full list of WISI brands and trademarks at www.wisigroup.com. Brands and trademarks of third-party suppliers are the property of their respective owner and do not imply any form of partnership between WISI and other companies. Copyright © 2024 WISI Communications GmbH & Co. KG. All rights reserved. 2026/03



All rights reserved. WISI cannot be held responsible for any printing errors. 2026/03

PROSE FALCON 085303

Compact Video Headend
Receive. Process. Distribute.



GF product range



Compact video headend

The new FALCON headend product range features well known and established WISI signal processing technology which is used in various new and future-proof model versions and can be adapted to meet specific market needs by means of flexible configurations.


Applications

- ✓ Hotels and B&Bs
- ✓ Leisure centres and campsites
- ✓ Hospitals and rehab clinics
- ✓ Cruise and merchant ships
- ✓ Care and retirement homes
- ✓ Offices and shared flats

Properties



- ✓ Transmodulation of 6/12 input channels in up to 16 DVB-C/T output channels or 256 SPTS Streams
- ✓ Choice of models with DVB-S/S2 or DVB-T/T2/C input tuner
- ✓ Integrated switching matrix and DiSEqC 1.0 control
- ✓ Multiplexing at the input (upstream of CI) and the output
- ✓ Models without or up to 8 CI Slots
- ✓ Up to 2 USB interfaces for Media-Player applications
- ✓ LCN/NIT table processing
- ✓ Hotel mode with PID remapping
- ✓ Channel list over SAP or as M3U data for the streamer models
- ✓ Straightforward, intuitive programming via web browser
- ✓ DHCP server functionality
- ✓ Test output socket (-20 dB) for interruption-free measurements
- ✓ Built-in high-efficiency switching power supply unit

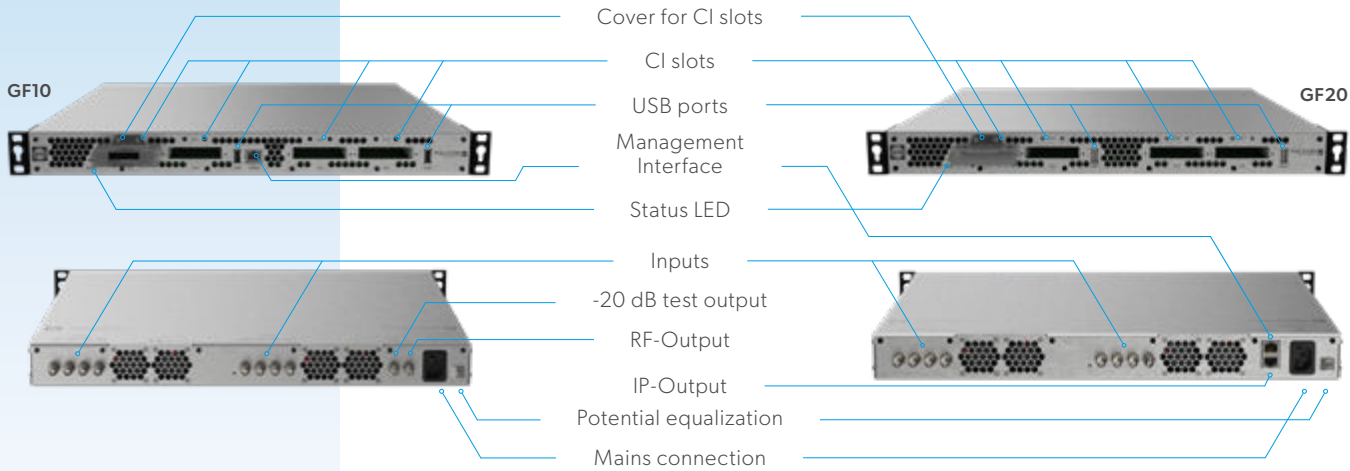

Function

Transmodulation of up to 12 satellite transponders (DVB-S/S2) or terrestrial DVB-T/T2 or CATV DVB-C receiver channels to up to 16 DVB-C or DVB-T output channels or up to 256 SPTS IP-Streams.

The integrated switching matrix means that it is incredibly simple to assign the various connected polarisation levels to each receiver tuner and does away with the need for additional external devices. This saves space, material costs and installation time.

The models with CI slots can be equipped with up to eight CAM modules which can be used for the central decryption of programmes. The multiplexing functionality at the input of the CI interfaces helps ensure that the CAM capacity is used in the most effective way with regard to the number of programmes which can be decrypted simultaneously. This way, programmes from different SAT input transponders or terrestrial channels can be combined to form a CAM module.

Thanks to the additional multiplexing function at the output, output channels can also be processed in any combination of programmes. The maximum available bandwidths and data rates of the applicable broadcast transmission standard – DVB-C or DVB-T – are taken into consideration.

IP-Streamer models can process up to 256 SPTS streams as UDP/RTP Unicast oder Multicast Streams. Corresponding channel lists can be generate and provide using the SAP protocol or by M3U data, depending on the connected IP receiver devices.

External content, such as video sequences, can be added to the data flows via the USB ports.

