


AIRPORTS (Continued)

Airport Data Grouping

(Pvt): Non-public use having emergency or landmark value.

“OBJECTIONABLE”: This airport may adversely affect airspace use.

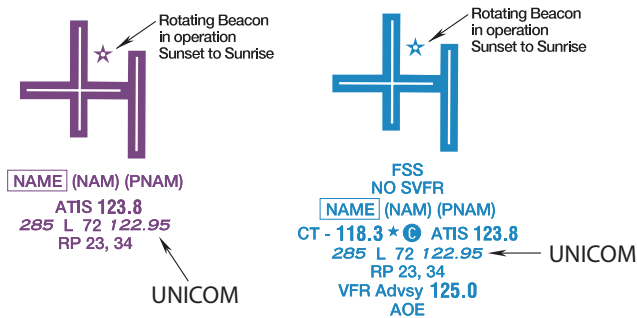

Flight Service Station on field	FSS	Elevation in feet	285
Airports where fixed wing special VFR operations are prohibited (shown above airport name) FAR 91	NO SVFR	Lighting in operation Sunset to Sunrise	L
Indicates FAR 93 Special Air Traffic Rules and Airport Traffic Pattern		Lighting limitations exist; refer to Chart Supplement	*L
Location Identifier	(NAM)	Length of longest runway in hundreds of feet; usable length may be less.	72
ICAO Location Identifier	(PNAM)	Aeronautical advisory station	122.95
Control Tower (CT) - primary frequency	CT - 118.3	Runways with Right Traffic Patterns (public use)	RP 23,34
Star indicates operation part-time. See tower frequencies tabulation for hours of operation	*	See Chart Supplement	*RP
Follows the Common Traffic Advisory Frequency (CTAF)	C	VFR Advisory Service Shown when ATIS is not available and frequency is other than the primary CT frequency.	VFR Advsy 125.0
Automatic Terminal Information Services	ATIS 123.8	Weather Camera (Alaska)	WX CAM
Automatic Flight Information Service	AFIS 135.2	Airport of Entry	AOE
Automated Surface Weather Observing Systems; shown when full-time ATIS is not available.	ASOS/AWOS 135.42	When information is lacking, the respective character is replaced by a dash. Lighting codes refer to runway edge lights and may not represent the longest runway or full length lighting.	