

XP105P







IK05

#### **FEATURES**



• CRI: 82+, 90+, 95+

• Nominal Wattage: 50W, 80W. 120W

• CCT:3000K, 4000K, 5000K, 6000K

• Finish: White Black Silver Custom

• Dimming: On/off, 1-10V, DALI Color

• Changing Emergency: None 1.5 hours, half power

120W

20400Lm

• Sensor: None Motion and daylight sensor

• Life Time: 50,000h

CO-Pro-XB50X120W

• 5 years warranty

#### **Data Sheet**





1200x105mm

IK05

IP20

Model N°	Pover	Lumen	Lumen Flux	Function	Dimension	IP	IK
CO-Pro-XB50X50W	50W	9300Lm	6600Lm		600x105mm		
CO-Pro-XB50X80W	80W	13600Lm	9600Lm	DALI	900x105mm	IP20	IK05

14400Lm

Model N°	Pover	Lumen	Lumen Flux	Function	Dimension	IP	IK
CO-Pro-XB50X75W	50W	12750Lm	7500Lm		600x105mm		
CO-Pro-XB50X80W	120W	20400Lm	12000Lm	DALI	900x105mm	IP20	IK05
CO-Pro-XB50X120W	180W	30600Lm	18000Lm		1200x105mm		

#### **PRODUCT**






Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in diff erent versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that diff erent room concepts can be implemented cost eff ectively and energy efficiently, while maintaining a clean and uniform design style.


## DIMENSION




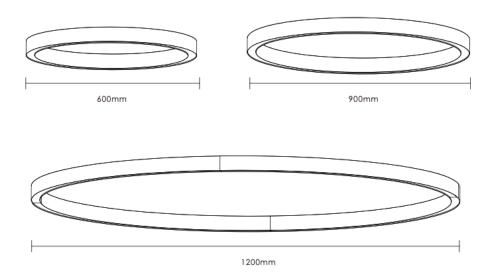

### INSTALLATION









Indoor



General lighting



High efficiency



Anti glare



Accurate light distribution




flickering



Long life

## **APPLICATION**



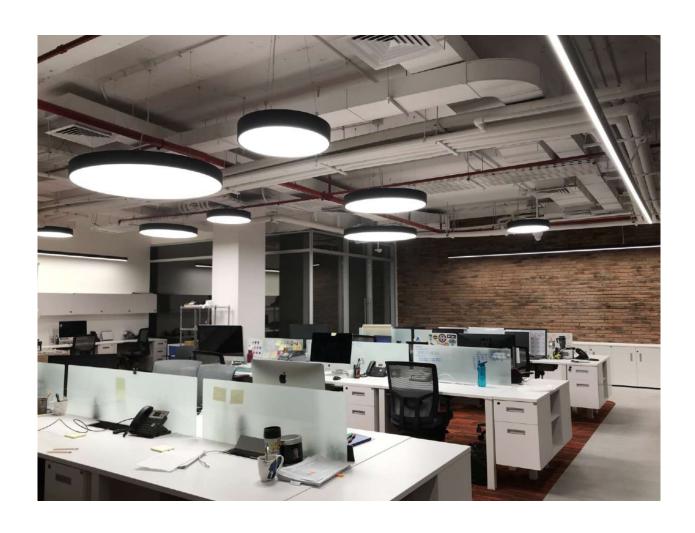

# Faron.PRO

Ctra. Bilbao-Plentzia, 31 inbisa, modulo 003 48950 Asua, Erandio (Bizkai)

Tel. 946 460 160 / info@ferongroup.eu / www.ferongroup.eu / FERON EUROPE GROUP