



XGM Lite frame - floor plan 1:1

Box outside 270.7 × 244 mm, seen from above with the board's components facing up. Print at 100 % (actual size), never "fit to page".

Sheet 1 of 2. Cut along the dashed line, lay this sheet on sheet 2 with the cut edge on its dashed line and the crosses lined up, then tape.

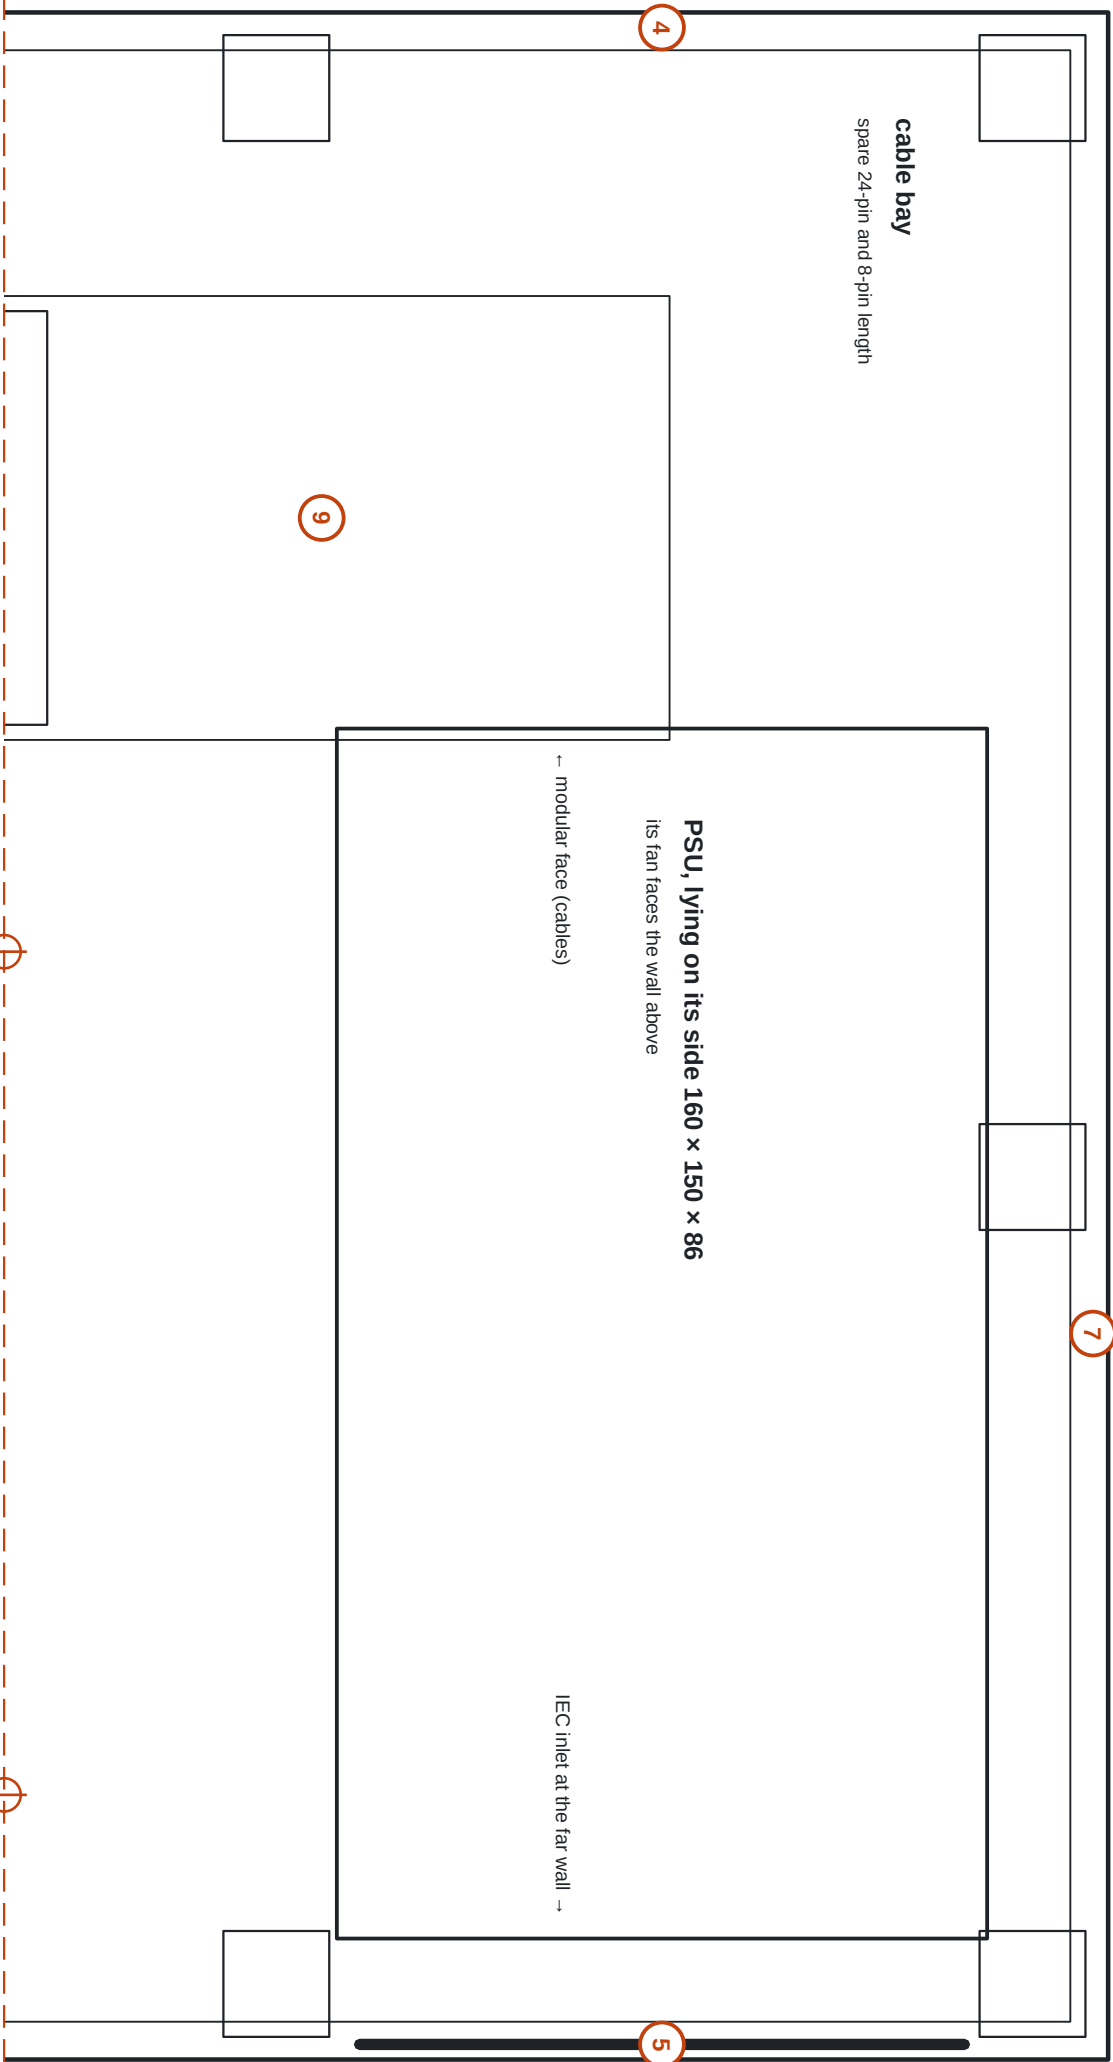

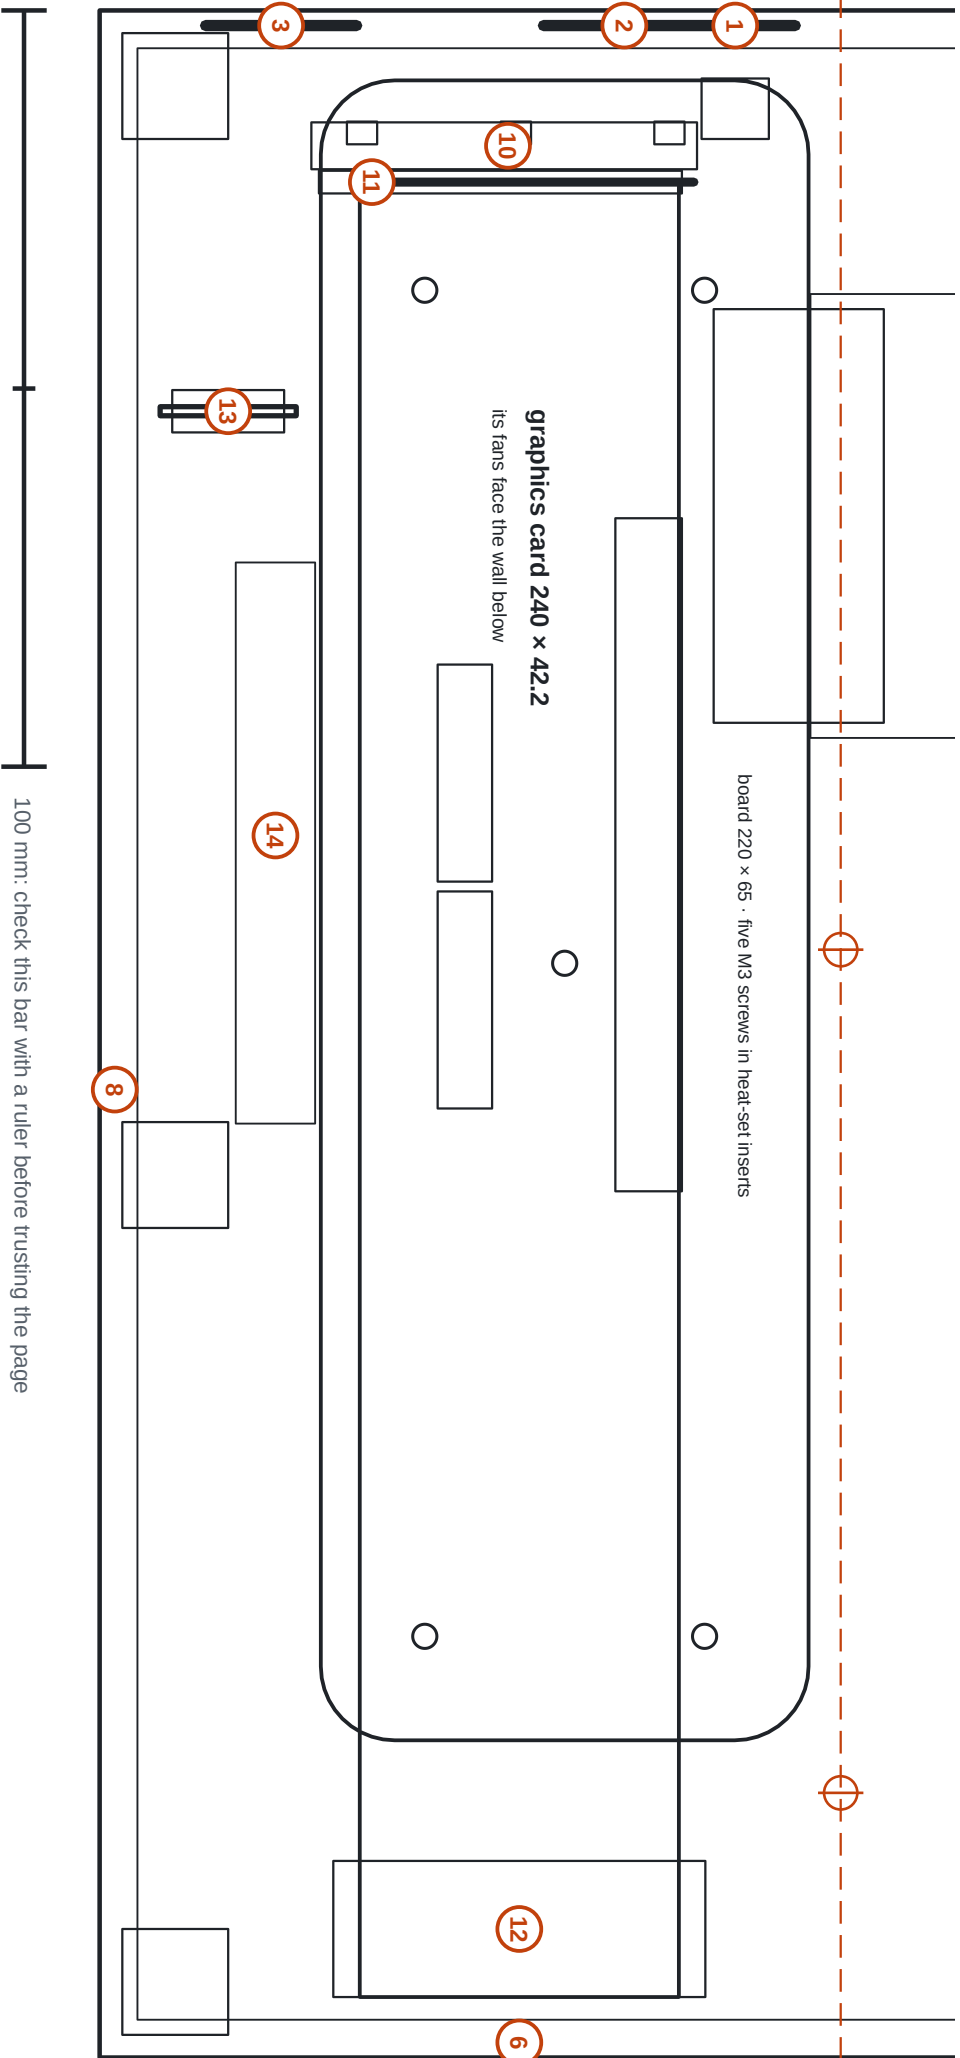

Numbered markers

- | | | | |
|----------|---|-----------|--|
| 1 | USB-C opening in the rear wall | 8 | wall below the card: intake grille for the card's fans |
| 2 | window in the rear wall for the card's display ports | 9 | 24-pin plug and its sleeved bend: keep this area clear |
| 3 | notch for the laptop cable, open at the bottom of the rear wall | 10 | bracket holder, standing in the board's three small holes |
| 4 | rear wall: vents over the cable bay | 11 | bracket line: the bracket's foot drops into the board's slot |
| 5 | far wall: opening for the PSU's power inlet and switch | 12 | cradle under the card's far end |
| 6 | far wall: exhaust grille for the card | 13 | clip for the laptop cable's rubber grommet |
| 7 | wall above the PSU: PSU intake grille | 14 | the laptop cable's taped harness runs along this edge |