


Features:

- 1: Operating Voltage : DC 6-24V(DC 9V 12V 15V 24V)
- 2: Operating Current :8-13MA(It is related to the number of external DS18B20)
- 3: MODBUS RTU Command support 03 06 function code
- 4:Temperature sensor is DS18B20, Up to 8 DS18B20 temperature sensors can be connected at the same time
- 5 Measures Temperatures from -55°C to +125°C(-67°F to +257°F)
±0.5°C Accuracy from -10°C to +85°C
- 6 :MODBUS commands can be made serial HyperTerminal (serial assistant) OR PLC Enter;
- 7 :Under the MODBUS command mode, it can support up to 247 devices in parallel
- 8 :Size: 70 * 46 * 18mm
- 9 :Weight: 40 g

Modbus RTU Command Please refer to : "R4DCB08 modbus rtu protocol"

Wiring diagram:

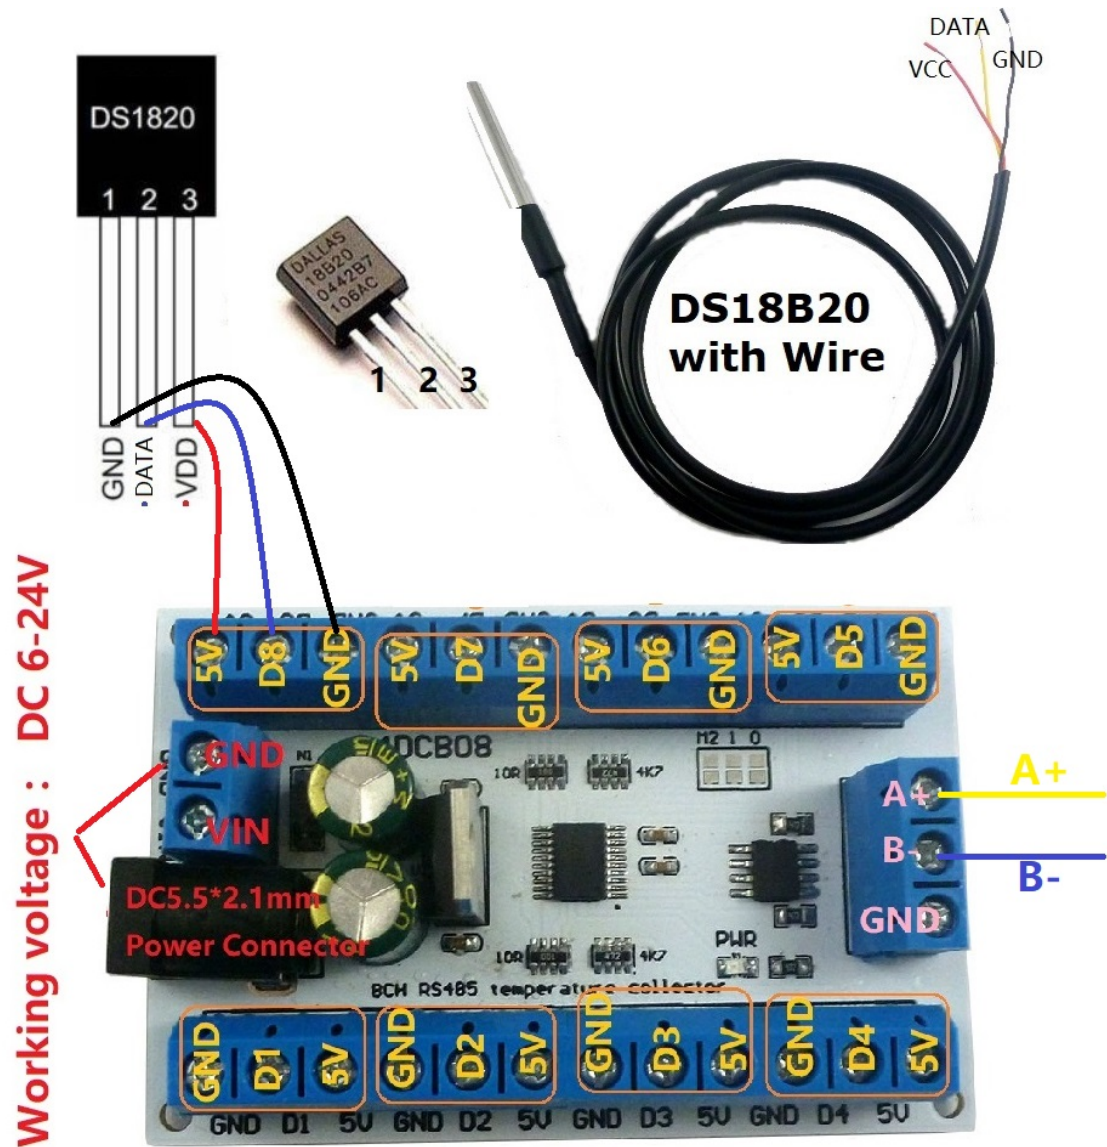

Slave ID: Different "Sliver ID" can be set by command, the maximum number is 247

Under the MODBUS command mode,the slave ID must be correct

Command Description, Please refer to "R4DCB08 modbus rtu protocol "

