

CS-XTEE-01

working code 暂定款号

Oversized boxy tee: reverse-appliqué X + checker shoulder tape

宽松落肩短袖T恤：前胸反面贴布绣X + 肩缝棋盘格织带

Description 款式描述	Oversized drop-shoulder tee. Front: X made by reverse appliqué: the cream top layer is cut away inside the stitch line to show a chocolate-brown jersey under-patch; raw cut edges. Shoulders: woven checker tape centred over both shoulder seams. 宽松落肩短袖T恤。前胸X为反面贴布绣：车线内剪开米白面布，露出咖啡色汗布底布，剪口毛边。两边肩缝居中压棋盘格提花织带。
Factory 工厂	Dongguan Xinhui Garments Co., Ltd, Humen, Dongguan, Guangdong, China
Factory style no. 工厂款号	TBD Factory to assign; reference base below. 请工厂编号
Base block 原版	XH25-IM1222-M (DROP 001). Use the same pattern, grading, neck rib, stitch types and label position. Body fabric per the rule on page 7. Change ONLY the items in this tech pack. 沿用XH25-IM1222-M原版纸样、放码、领罗纹、做工及唛位；大身面料按第7页规定。仅修改本工艺单列明项目。
Sizes 尺码	S / M / L / XL. Sample size: M 基码：M
Quantity 数量	TBD Bulk quantity and size split (DROP 001 was 100 + 10 extra). 大货数量及尺码配比待定
Price 价格	TBD Factory to quote; X operation, under-patch fabric and tape attach as separate lines, with and without garment wash. 请报价：X工艺、底布、织带及上织带工序分开报价；含水洗与不含水洗分别报价
Status 状态	v0.1 DRAFT for Cultsiders review. v1 goes to the factory for the technique swatch + proto (2 pcs). v0.1草稿供客户审阅；v1发工厂打工艺小样及头办（2件）。
Contacts 联系人	TBD Cultsiders: Ivan Montenegro, email / WeChat to be added. Factory merchandiser: name to be added. 双方联系人及微信待补充

Pages: 1 Cover 2 Flats 3 X geometry + template 4 X construction 5 Shoulder tape 6 Measurements 7 BOM 8 Labels, QC, samples. Files: CS-XTEE-01-X-template-1to1-PROPOSAL.pdf, CS-XTEE-01-X-template-200mm.dxf, CS-XTEE-01-X-template-150mm.dxf (+ R2000 copies).
页码：1封面 2款式图 3 X尺寸及模板 4 X工艺 5 肩部织带 6 尺寸表 7 物料表 8 唛头、验货、样衣。附件：1:1模板PDF及DXF文件（R12及R2000）。

CHANGES VS BASE XH25-IM1222-M 相对原版的修改

#	Area 部位	Change 修改内容	Page 页
1	Front 前片	DROP 001 printed X removed. New reverse-appliqué X (1:1 template files). 取消DROP 001印花X，改为反面贴布绣X（附1:1模板）	3, 4
2	Shoulders 肩部	Add checker tape over both shoulder seams. 两边肩缝加棋盘格织带	5
3	Labels 唛头	Add size + origin label at CB neck and care / content label in side seam. 后中领加尺码及产地唛，侧骨加洗水成分唛	7, 8
4	Size spec 尺寸	TBD Per-POM tolerances; half bottom and XL half cuff to confirm. 逐项公差；下摆及XL袖口待确认	6
5	Back 后片	TBD Back: none (recommended), or a new Cultsiders graphic with no straw hat, character or series reference. 后片：无图案（建议），或新图案（不得有草帽、人物、作品元素）	2

CRITICAL QUALITY POINTS 重点品质要求

- 1


Brown must not stain the cream: colourfastness tests and a whole-garment wash test before bulk.
咖啡色不得沾染米白：大货前须做色牢度测试及成衣洗水测试。
- 2

Body and under-patch in the same fabric article, both pre-shrunk; otherwise the X puckers.
大身与底布用同款面料并预缩，否则X起皱。
- 3


Never cut the brown. Cut-to-stitch nominal 4-7 mm (B: at the valleys); accept ≥ 3 mm; reject < 3 mm or any cut stitch.
不可剪到底布。剪口距车线标准4-7mm（B方案按齿谷）；≥3mm可接受；<3mm或剪断车线为次品。
- 4

Tape pre-shrunk, sewn flat without stretching, ends covered at the neck, same phase both shoulders.
织带预缩，平车不拉伸，领口端盖好，两肩花位一致。

FRONT

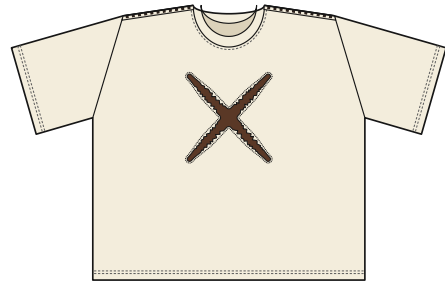

BACK

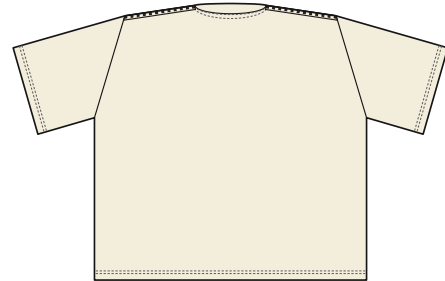

COLOURWAY 配色


	Body 大身	TBD Cream = DROP 001 bulk shade (approved standard). Body colour itself is still open; cream proposed. 米白，以DROP 001大货布为标准；大身颜色待定（建议米白）
	Under-patch 底布	TBD Chocolate brown jersey, Pantone TCX code open; lab dip required. 咖啡色汗布，潘通TCX色号待定，须调色样
	Checker tape 织带	Cream + brown-black. Founder's physical roll is the standard. 米白 + 深棕黑，以客供实物为准
	X thread X车线	TBD Proto A: cream (tonal). Proto B: brown-black (contrast). Choose one for bulk after the protos. 头办A件米白同色线，B件深棕黑撞色线；看头办后大货二选一

REVISION LOG 修改记录

Rev	Date 日期	Change 内容	By 修改人
v0	2026-09-28	First draft from technique research. Open points marked TBD. 初稿，待定项已标黄	Cultsiders
v0.1	2026-09-29	Review fixes: protos A/B, edge variants, staggered teeth + min. brown, X orientation marks, tape stitch, neck-end cover, stitch-crack fallback, corner radii, back artwork, fabric rule, US import documents. 审核修改：头办A/B、边缘方案、锯齿错开及最小咖啡色宽度、X方向标记、织带车线、领口端覆盖、断线对策、内角半径、后片图案、面料规定、美国进口文件	Cultsiders
v1	TBD	TBDs answered; release to factory for swatch + proto. 确认待定项后发工厂打小样及头办	Cultsiders

Brand rule: no character artwork, character names or third-party logos on the garment, labels, packaging or files. The X is a plain graphic.
品牌规定：服装、唛头、包装及文件上不得出现动漫人物、角色名称或他人商标。X为普通图形。

FRONT VIEW 正面

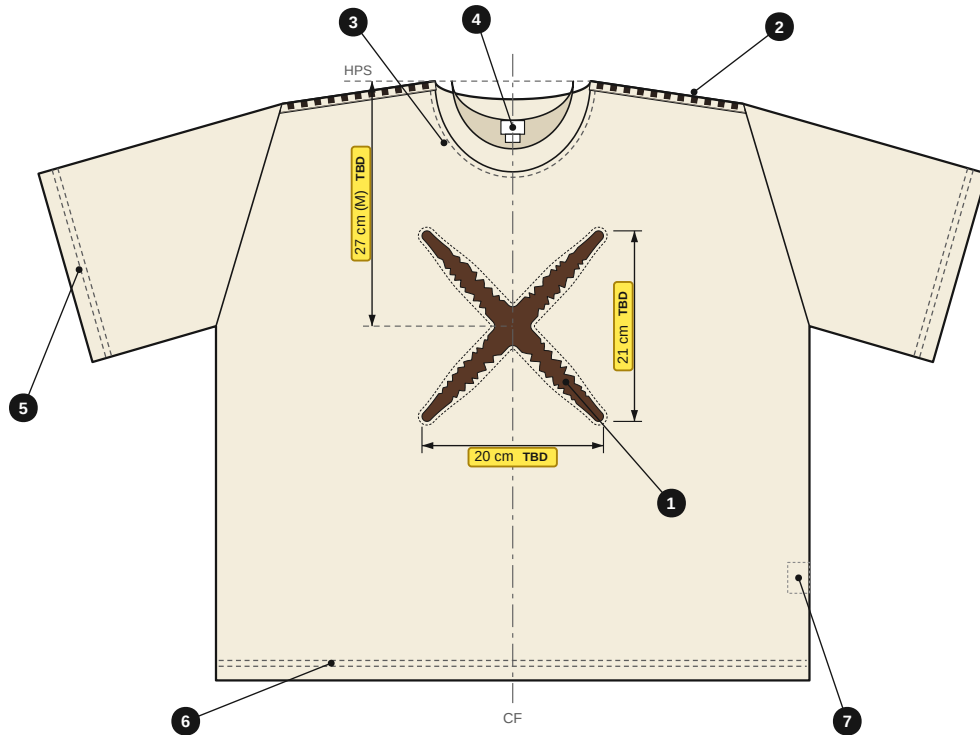

BACK VIEW 背面



Size M, approx. 1:9

CALLOUTS 说明


- Reverse-appliqué X: cream top layer cut away to show brown under-patch. 1:1 template files; see pages 3 and 4.
反面贴布绣X: 剪开米白面布露出咖啡色底布; 附1:1模板文件, 见第3、4页。
- Checker tape centred on shoulder seam, neck seam to sleeve seam. Each view shows half the tape width. See page 5.
棋盘格织带居中压肩缝, 由领骨至袖窿骨; 每个视图只见一半宽度。见第5页。
- Neck rib 1" (2.5 cm) finished, as base.
领罗纹成品高2.5cm, 同原版。
- TBD Inside CB neck: CS main label, artwork TBD (page 7) + NEW size / origin label (page 8).
后中领内: 主唛稿待定 (见第7页) + 新增尺码及产地唛 (第8页)。
- Sleeve hem coverstitch, as base.
袖口包车, 同原版。
- Body hem coverstitch, as base.
下摆包车, 同原版。

- TBD NEW care / content label in wearer's left side seam, inside; height above hem open.
新增洗水成分唛, 车于穿着者左侧骨内, 离下摆高度待定。
- Tape back half. Neck end caught in the neck seam and covered by the back neck tape; sleeve end caught in the armhole seam.
织带后半部分; 领口端夹入领骨并由后领贴盖住, 袖窿端夹入上袖骨。
- Back neck tape inside, as base, but extended 2 cm past each shoulder seam onto the front neckline to fully cover the checker tape ends (page 5).
后领贴同原版, 但两端各过肩缝2cm至前领, 完全盖住织带端口 (第5页)。
- Labels at CB neck, inside (hidden line).
后中领内唛头 (虚线)。
- Armhole seam as base; tape end enclosed.
上袖骨同原版, 织带端藏入缝内。


TBD Drawing only: armhole, neck drops and hem heights are drawn as assumptions; values come from the factory's DROP 001 pattern (page 6, POM I / P / Q). X size and position shown are proposals (Proto A 200 mm; Proto B 150 mm, same X centre).
仅为示意: 袖窿、前后领深、下摆高按假设绘制, 数值以工厂DROP 001纸样为准 (第6页I/P/Q)。X尺寸及位置为建议值 (头办A件200mm; B件150mm, X中心相同)。

OUTSIDE VIEW (FACE), SCALE 1:2 正面视图 1:2

1:1 template (PROPOSAL): CS-XTEE-01-X-template-1to1-PROPOSAL.pdf (page 1, A3: 200 mm X; page 2, A4: 150 mm X) and CS-XTEE-01-X-template-200mm.dxf / CS-XTEE-01-X-template-150mm.dxf (R12; R2000 copies ~R2000.dxf). Layers STITCH, BASE, CUT_JAG, PATCH, CHECK, GUIDE, ORIENT (150 mm file also STITCH_FOLLOW). Units mm, origin = X centre. CHECK = 50 x 50 mm square: measure it after import. Face view: never mirror or rotate the template, guide or program.
1:1模板（建议稿）：PDF第1页A3为200mm X，第2页A4为150mm X；DXF为R12格式（另附R2000副本）。图层：车线STITCH、基准线BASE、剪口CUT_JAG、底布PATCH、校准CHECK、GUIDE、ORIENT（150mm另有STITCH_FOLLOW）。单位mm，原点为X中心；CHECK为50 x 50mm方块，导入后先量。正面视图：模板、剪口模板及绣花程序不可翻转或旋转。

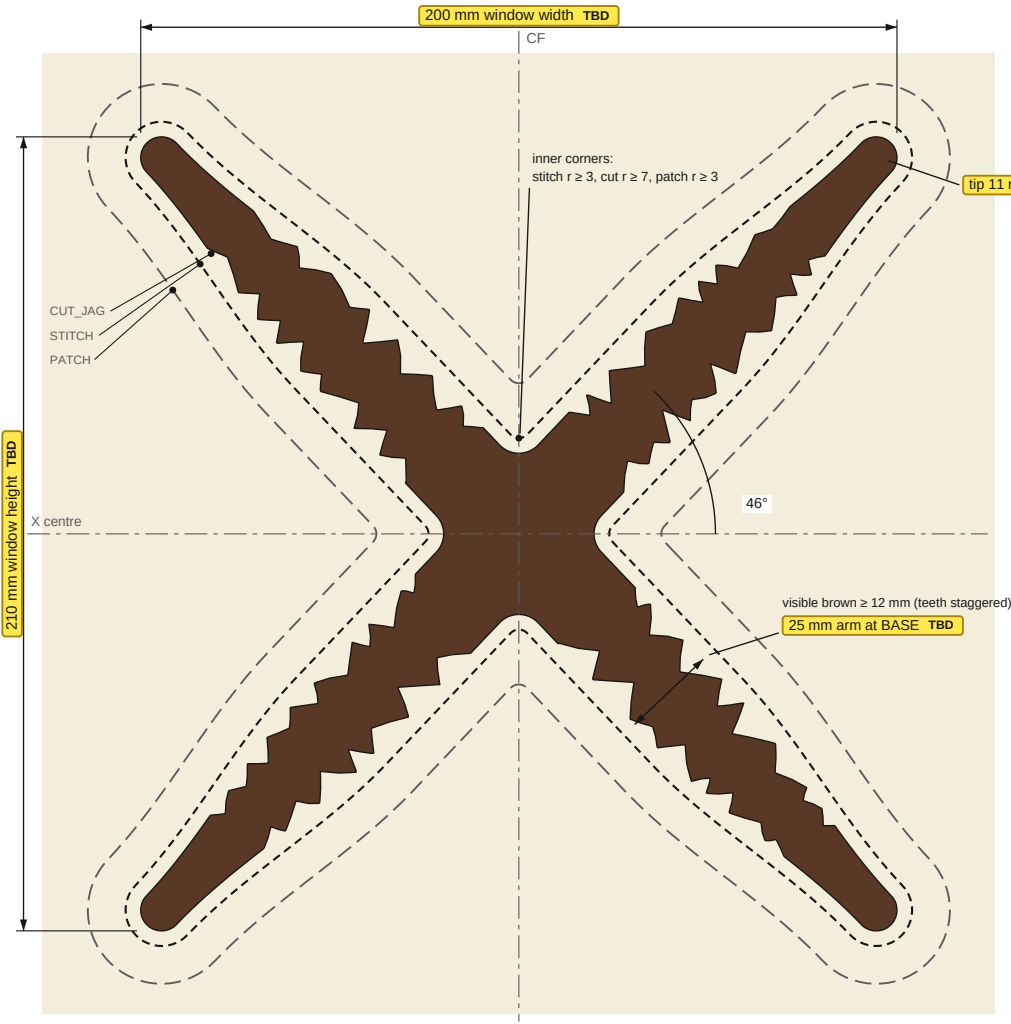

EDGE VARIANTS, SCALE 1.5:1 边缘方案 1.5:1（小样对比）

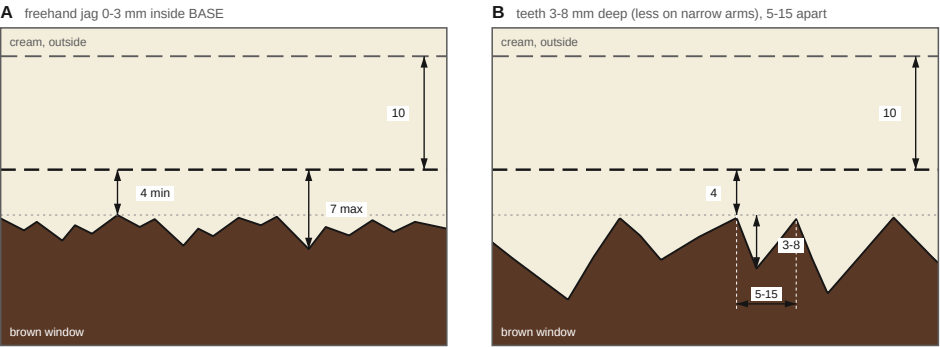


C = B + hand-brushed or sanded raw edge. Make A, B and C on the technique swatch, photograph all three after 3 washes, then choose. In B the stitch stays smooth and at least 3 mm from the deepest valley (drawn at 4 mm). All dimensions in mm.
C = B + 手工磨毛边。工艺小样上A、B、C三种都做，洗3次后拍照再定。B方案车线平顺，距最深齿谷≥3mm（图示4mm）。单位mm。

- CUT_JAG: cut the CREAM layer only; the cream inside is removed.
剪口线：只剪米白面布，线内面布剪掉。
- STITCH: through both layers, 4 mm outside the base line (solid line on the 1:1 template).
车线：穿过两层，距剪口基准线4mm（1:1模板上为实线）。
- PATCH: cut the under-patch on this line = stitch + 10 mm. No trimming after sewing.
底布裁剪线：车线外10mm，车后不再修剪。
- BASE line (DXF layer BASE; fine dotted on the 1:1 template): STITCH offset 4 mm inward, inner corners $r \geq 7$ mm. A: cut freehand 0-3 mm inside it. B: the valleys of the jag sit on it.
剪口基准线BASE（DXF图层BASE，1:1模板上为细点线）：车线向内4mm，内角半径≥7mm。A方案：在此线内0-3mm徒手剪；B方案：锯齿谷底在此线上。

Item 项目	Proposed for swatch / proto 打样建议值
X size (window) X尺寸（开口外框）	TBD Proto A: 200 x 210 mm, all sizes the same. Proto B: approx. 150 mm (150 x 157.5), all sizes the same. 200 x 210 mm, 全码相同；另一方案：X约150mm（全码相同），用于对比打样。
Arm / tip 臂宽 / 尖端	TBD Proto A (200 mm): arm 25 mm at BASE (range 22-28); after the teeth at least 12 mm of brown shows; tapering to 10-12 mm round tips (drawn 11). Proto B (150 mm): arm 19 mm, brown ≥ 10 mm, tips 10 mm. Never narrower than the tip. Approve the tip after 3 washes. A件：BASE处臂宽25mm（22-28），锯齿后可见咖啡色≥12mm，尖端10-12mm圆头（图示11mm）；B件：臂宽19mm，咖啡色≥10mm，尖端10mm。任何位置不窄于尖端。洗3次后确认。
Teeth (edge B) 锯齿（B边）	3-8 mm deep, less where the arm narrows; 5-15 mm apart. Opposite sides staggered: together $\leq 40\%$ of the local arm width. None on corner arcs or in the last 15-20 mm before each tip cap (18 / 16 mm). 齿深3-8mm，臂变窄处更浅；齿距5-15mm。两侧锯齿错开：同一截面合计≤该处臂宽40%。内角圆弧及尖端前15-20mm（18/16mm）不做锯齿。
Inner corners 内角	STITCH $r \geq 3$ mm; CUT line $r \geq 7$ mm; PATCH $r \geq 3$ mm. 车线半径≥3mm；剪口≥7mm；底布≥3mm。
Cut to stitch 剪口至车线	Nominal 4-7 mm (B: at the valleys). Accept ≥ 3 mm. Reject < 3 mm or any cut stitch. 标准4-7mm（B方案按齿谷）；≥3mm可接受；<3mm或剪断车线为次品。
Placement 位置	TBD X centre on CF, 26 / 27 / 28 / 29 cm below HPS (S / M / L / XL). Same centre for Proto B. X中心在前中，距高肩点26/27/28/29cm；B件中心相同。
Edge style 边缘效果	TBD Swatch: A / B / C side by side; the bulk edge is chosen after 3 washes. Both protos: edge B, cut on CUT_JAG. Stitch smooth on STITCH (Proto A) or following the jag at 4 mm (Proto B, layer STITCH_FOLLOW). 小样：A/B/C并排，洗3次后定大货边。两件头办均用B边，按CUT_JAG剪。车线：A件沿STITCH平顺；B件沿锯齿4mm（STITCH_FOLLOW图层）。
Template 模板	Factory digitises the STITCH layer (Proto B: STITCH_FOLLOW; digitising fee quoted separately) and makes the cut guide, placement template and stitch-marking stencil (page 7, TOOLING). Face view: never mirror or rotate; CF notch, arrow and FACE UP / NECK on all tooling. 工厂按STITCH图层制版（B件用STITCH_FOLLOW；制版费另报），并制作剪口模板、定位板及车线号线板（第7页）。正面视图，不可翻转或旋转；所有工装均开前中缺口并箭头及FACE UP / NECK。

CROSS-SECTION THROUGH ONE ARM X臂横截面（示意，厚度放大）

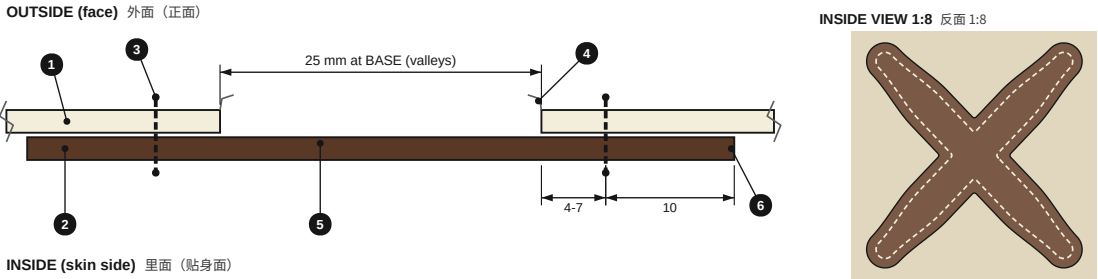

- 1

Cream body jersey (top layer), front panel.
米白大身汗布（面层），前片。
- 2

Brown under-patch on the wrong side; brown FACE side toward the outside.
咖啡色底布放前片反面，正面朝外。
- 3

Stitch through both layers on the STITCH line (ISO 301 or embroidery run).
沿STITCH线穿两层车线（301平车或电脑绣花跑针）。
- 4

Raw cut edge of cream, 4-7 mm from stitch. It rolls into a soft lip after washing; it does not fuzz like fleece.
米白剪口毛边，距车线4-7mm；洗后卷成软边，不会像卫衣布起毛。
- 5

Window: brown face visible from outside.
开口：从外面看见咖啡色正面。
- 6

Under-patch cut at stitch + 10 mm (PATCH layer), raw, not overlocked, no trimming.
底布按PATCH图层截至车线外10mm，毛边不拷边，不修剪。
- Inside view: back of the under-patch with the bobbin line. Thread tails 3-5 mm; no knots against the skin.
反面：底布反面可见底线；线头剪至3-5mm，内侧不得有线结。

STITCH SPECIFICATION 针步规格

Operation 工序	Stitch 线迹	SPI 针距	Thread 用线	Needle 机针
X outline, flatbed X轮廓（平车）	ISO 301 lockstitch on the STITCH line (Proto B: STITCH_FOLLOW), marked on the face with the stitch-marking stencil + air-erasable pen 单针平车301，沿STITCH线（B件：STITCH_FOLLOW）；用车线画线板及气消笔在正面画线	10-12 SPI (2.1-2.5 mm) 每英寸10-12针	TBD 402 spun poly, needle + bobbin. A: cream, B: brown-black 402涤纶线，A件米白、B件深棕黑	Ballpoint Nm 75-80 圆头针75-80号
X outline, embroidery X轮廓（电脑绣花）	Running stitch, panel hooped; factory digitises from the DXF STITCH layer (fee quoted) 跑针，上绷；工厂按DXF制版并报制版费	2.5 mm run 跑针2.5mm	120D/2 polyester embroidery thread (40 wt) 120D/2涤纶绣花线	DBxK5 SES 75/11 ballpoint DBxK5圆头75/11针
Start / stop on a straight section mid-arm, overlap 3 stitches (embroidery: tie-in / tie-off); no back-tack pile at corners. Inner corners: one 10 mm repeat pass only; bartack only if the proto shows splitting. 起止针在臂中直线段，重叠3针，不在内角回针；内角只重复车10mm一次，头办有裂开才加打枣。				
If stitch cracks: (1) balance / reduce needle tension, keep 10-12 SPI (do not lengthen the stitch); (2) textured / wooly poly bobbin; (3) narrow 304 zigzag, 1.5 mm throw, 12 SPI. Triple / bean stitch only for coverage, not for stretch. 断线时：先调松面线张力，针距保持每英寸10-12针（不可加长针距）；底线改弹力线；仍断则改窄人字车1.5mm。三重跑针只增加覆盖，不增加弹性。				
All other seams 其他缝位	As base XH25-IM1222-M 同原版	as base 同原版	as base 同原版	as base 同原版

TBD Method to confirm on swatch / proto: stitch-then-cut (drawn) or cut-then-stitch; embroidery machine or flatbed; X done in-house or by a Humen embroidery subcontractor.
小样或头办确认做法：先车后剪（图示）或先剪后车；电脑绣花或平车；厂内或外发虎门绣花厂。



LOOK REFERENCE 效果参考

TBD

Mock-up close-up 1
after 3 washes
founder adds photo
客户补充照片

TBD

Mock-up close-up 2
inner corner
founder adds photo
客户补充照片

TBD

Mock-up close-up 3
tip
founder adds photo
客户补充照片

Target edge after wash: founder's home mock-up (cream tee + brown tee scrap, stitched, cut, washed 3 times).
洗后目标效果：客户手工样（米白T恤+咖啡色T恤布，车线剪开后洗3次）。

Physical items shipped with v1: (1) tape roll or 1 m swatch; (2) the approved DROP 001 piece as counter sample; (3) Pantone TCX brown swatch; (4) the mock-up.
v1随附实物：（1）织带整卷或1米样；（2）DROP 001确认样作封样；（3）潘通TCX咖啡色卡；（4）手工样。

SEQUENCE ON THE FLAT FRONT PANEL 前片裁片工序

- 1

Pre-test: shrinkage (length and width) of cream and brown; colourfastness of brown (page 8).
预测：米白及咖啡色布缩水率（长宽）；咖啡色布色牢度（第8页）。
- 2

Cut front panel as base. Mark CF and the X centre with the placement template (air-erasable pen only). Flatbed route: also mark the stitch path on the face with the stitch-marking stencil (STITCH layer; Proto B: STITCH_FOLLOW).
按原版裁前片；用定位板标前中及X中心（只供气消笔）。平车做法：再用车线画线板在正面画车线（STITCH图层；B件：STITCH_FOLLOW）。
- 3

Cut the under-patch X-shaped on the PATCH layer (stitch + 10 mm), same grain as body. Place it on the WRONG side of the front with the placement template, brown face toward the panel. Backing: (a) none, two layers hooped + light spray adhesive (test first), or (b) 1.5 oz fusible no-show mesh left in. Compare a and b on the swatch; no tear-away or wash-away unless the factory shows it on the swatch.
按PATCH图层裁X形底布（车线外10mm），布纹同大身；用定位板放前片反面，正面贴前片。衬：（a）不加衬，两层上绷+少量喷胶（先测试）；（b）1.5oz热熔网衬保留。小样对比a与b；除非工厂小样证明可行，不用撕纸或水溶纸。
- 4


Stitch the STITCH line (Proto B: STITCH_FOLLOW) through both layers (embroidery machine, panel hooped, preferred). Start / stop mid-arm, overlap 3 stitches, no back-tacks at corners; inner corners one 10 mm repeat pass. Arms run near 45 degrees: do not stretch the bias edges. Embroidery program in face view, arrow to the neck, the same orientation as the template (never mirrored).
沿STITCH线（B件：STITCH_FOLLOW）穿两层车线（首选电脑绣花上绷）。起止针在臂中，重叠3针，内角不回针，只重复车10mm一次。X臂接近45°斜向，不可拉扯。绣花程序按正面视图，箭头指领口，与模板方向一致（不可镜像）。
- 5

Both protos: edge B. Lay the cut guide (acrylic or cardboard, CUT_JAG layer) FACE UP, arrow to the neck, notch on CF, on the stitch line; never flipped or rotated. Proto B: before tracing, check that each tooth on the guide sits where the stitch steps in. Trace CUT_JAG onto the cream with an air-erasable pen. Cut the CREAM only, on the traced line, with duck-bill appliqué scissors. Any nick in the brown = reject. No laser or die cut unless approved. If tracing is not practical, cut freehand to the approved swatch: A = inside the 4-7 mm band from the stitch (0-3 mm inside BASE), 3-6 irregular teeth per 5 cm; B = teeth 3-8 mm deep (less where the arm narrows), 5-15 mm apart, staggered side to side, brown ≥ 12 mm (Proto B ≥ 10 mm), valleys never closer than 3 mm to the stitch.
两件头办均用B边。剪口模板（亚克力或硬纸板，按CUT_JAG图层）正面朝上、箭头指领口、缺口对前中。对准车线放好，不可翻转或旋转。B件：描线前核对模板上每个齿正对车线内折处。用气消笔画剪口线；用鸭嘴剪只剪米白面布。底布有剪口即次品。未经批准不可激光或刀模切割。如画线不可行，按确认小样徒手剪：A方案在距车线4-7mm范围内（BASE线内0-3mm），每5cm不规则齿3-6个；B方案齿深3-8mm（臂变窄处更浅），齿距5-15mm，两侧错开，可见咖啡色≥12mm（B件≥10mm），齿谷距车线不小于3mm。
- 6


No under-patch trimming (cut to size in step 3); trim to stitch + 7 mm only if the proto shows a flap flipping. Raw edges: no overlock, binding, satin, zigzag, glue, heat-seal or folding. Variant C only: brush the raw edge by hand.
底布已按尺寸裁好，车后不修剪；仅当头办底布外侧翻时修至车线外7mm。毛边外露：不锁边、不包边、不要缬面或人字包边、不上胶、不热封、不折边。仅C方案：手工磨毛边。
- 7

Then assemble as base: shoulders, tape (page 5), neck rib, sleeves, side seams, hems, labels. Garment wash open (protos unwashed). No garment dyeing.
之后按原版组合：合肩、上织带（第5页）、上领、上袖、埋夹、冚脚、上腰。成衣水洗待定（头办不洗），不可成衣染色。


TAPE ARTWORK, SCALE 2.5:1 织带图稿 2.5:1

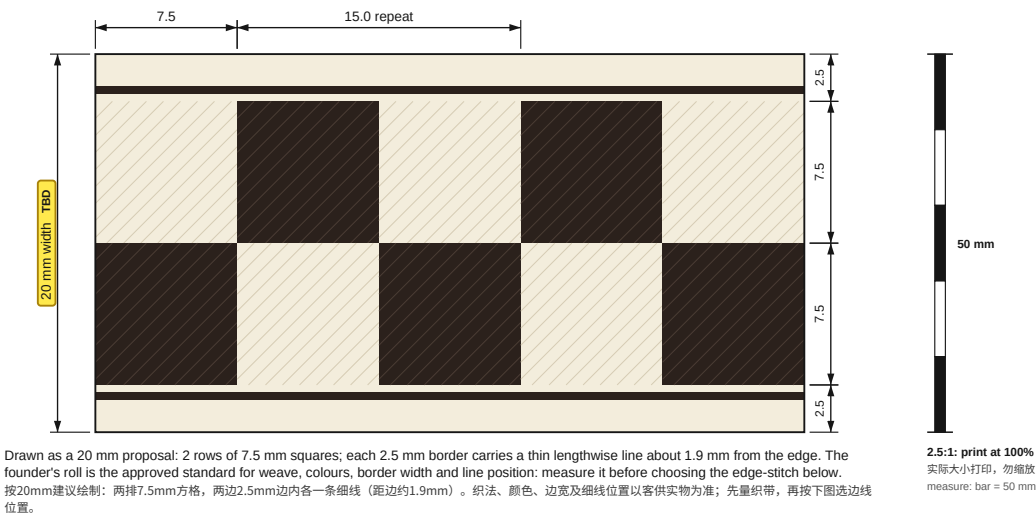

EDGE-STITCH POSITION, SCALE 5:1 织带边线位置 5:1

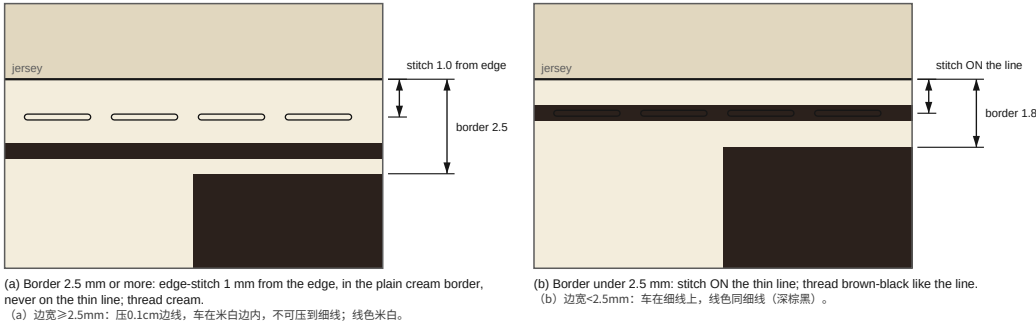

ON THE SHOULDER (TOP VIEW), SCALE 1:2 肩部位置（俯视）1:2

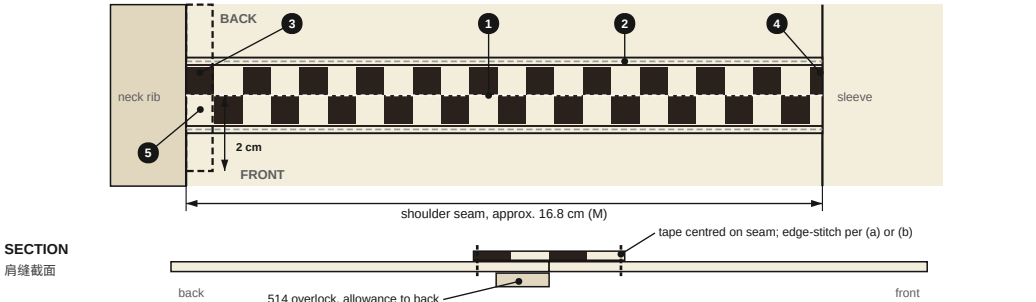

TAPE SPECIFICATION 织带规格

Type 类型	Woven checker tape (ichimatsu), garment ribbon weight. Founder's roll = approved trim standard; physical swatch sent. 棋盘格提花织带（市松格），服装用薄织带；以客供实物为准（寄样）
Width 宽度	TBD Measure founder's roll. If new: 20 mm. 量客供织带；如新做建议20mm
Border / line 边 / 细线	TBD Measure border width and thin-line position on the roll; they decide edge-stitch option (a) or (b). 量边宽及细线位置，决定边线做法（a）或（b）
Fibre 成分	TBD Confirm from roll or supplier (likely polyester). 待确认（可能为涤纶）
Colours 颜色	Cream + brown-black; match body cream and X brown by physical swatch. 米白 + 深棕黑，按实物对色
Shrinkage 缩水率	1% max, heat-set. Body width shrinkage ≤ 3% (page 7); at 5% vs 1% a 17 cm shoulder differs by about 7 mm and ripples. Washed with the body on Proto B; tape pucker is pass / fail in the wash photos. 不超过1%，定型。大身横向缩水≤3%（第7页）：若大身5%、织带1%，17cm肩缝相差约7mm，会起波浪。B件与大身同洗，洗后照片中织带起皱为合格判定项。
Colourfastness 色牢度	Washing staining grade 4 or better; wet rubbing 3 or better. 水洗沾色4级以上，湿摩3级以上
Thickness / ends 厚度 / 端口	0.8 mm max (garment ribbon, not bag webbing). Hot-cut if polyester; ends always hidden inside seams. 不超过0.8mm（非箱包织带）；涤纶热切，端口藏入缝内
Source 来源	TBD Customer-supplied, or factory finds the same stock tape in Humen. Add 10-15% spare. 客供或工厂在虎门找同款现货，另加10-15%

ATTACHING (numbers = top view) 上织带做法

- Join shoulders ISO 514 4-thread overlock, allowance to back. Tape centred on seam (+/-1.5 mm), outside.
四线包缝合肩，缝份侧向后片；织带居中压肩缝（±1.5mm）。
- Edge-stitch both edges ISO 301, 10-12 SPI. Measure the roll first: (a) border 2.5 mm or more: 1 mm from the edge in the plain cream border, never on the thin line, thread cream; (b) border under 2.5 mm: stitch ON the thin line, thread brown-black.
两边压单针明线，每英寸10-12针。先量织带：（a）边宽≥2.5mm：压0.1cm边线，车在米白边内，不可压到细线，线色米白；（b）边宽<2.5mm：车在细线上，线色同细线。
- Back neck tape extends 2 cm past each shoulder seam onto the front neckline, fully covering the checker tape end. Trim the checker tape end to 5 mm inside the neck seam allowance before attaching the rib. Tape never runs over the rib.
后领贴两端各过肩缝2cm至前领，完全盖住织带端口；上领前织带端修剪至缝份内5mm。织带不可压在罗纹上。
- Sleeve end caught in armhole seam.
袖窿端夹入上袖骨。
- TBD** Phase: at the FINISHED neck seam the first visible front-row square is cream and shows at least 5 mm; cut to pattern so both shoulders match.
花位：成品领骨处前排第一格为米白，外露≥5mm；对花裁剪，两肩一致。


Sew flat; do not stretch tape or jersey (puller or walking foot). No extra clear elastic in the shoulder seam: the tape stabilises it (factory to confirm base). Check: no lump or flare at HPS; tape ends not felt from inside.
平车时不拉伸织带及面料（用拖轮或同步送布）。肩缝不另加透明橡筋，由织带起牵条作用（请工厂确认原版做法）。检查：高肩点无鼓包、不外翻；内侧摸不到织带端口。

TAPE LENGTH 织带用量

Size	Seam/side cm 肩缝长/边	Cut/side cm 裁长/边	Per tee cm 每件	Qty 件数	Metres 米数
S	15.9	18	36	23	8.3
M	16.8	19	38	33	12.5
L	17.8	20	40	32	12.8
XL	18.7	21	42	22	9.2
Total				TBD 110	42.9 net

Seam per side = (shoulder width - collar width) / 2 from the chart; factory to confirm from the pattern. Qty = DROP 001 split. Net 43 m + 10% waste + pattern matching + samples = approx. 55 m; a 100 yd roll covers it.
肩缝长按尺寸表（肩宽-领宽）/2计算，以纸样为准；件数按DROP 001配比。含损耗、对花及样衣约55米，一卷100码足够。

POINTS OF MEASURE 量度部位

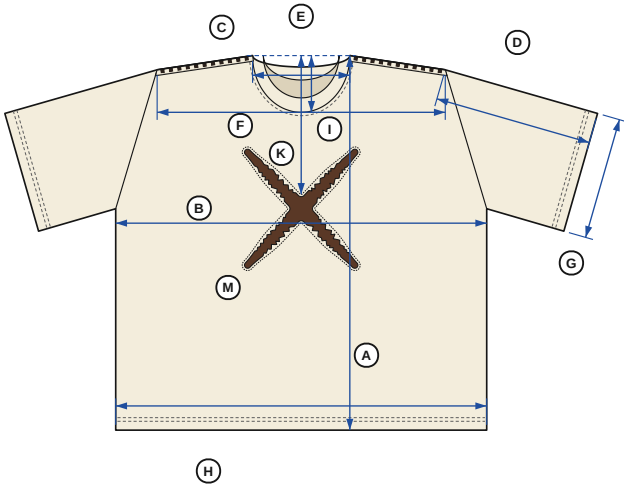

Measure the finished garment flat on a table, smoothed, not stretched. Half measurements.
If the garment is washed, measure after washing.
成衣平放量度，抚平，不拉伸。半围尺寸。如有水洗，以洗后尺寸为准。

Inches shown as decimals with cm below. Chart = DROP 001 chart with half chest reduced 1".
英寸以小数表示，下行为厘米。尺寸表为DROP 001尺寸，胸围已减1英寸。

TBD Tolerances are proposals per POM. The proforma says +/-0.5" for everything; please confirm or propose your own.
公差为逐项建议值；形式发票为统一±0.5英寸，请工厂确认或提出意见。

TBD Half bottom: the chest was reduced 1" but the hem was not. Keep hem as charted (1" wider than chest, slight flare) or reduce by 1" too?
胸围已减1英寸，下摆未改：下摆保持原数（比胸围宽1英寸）还是同样减1英寸？

POM	Point of measure 部位	How to measure 量法	Tol +/- 公差	S	M	L	XL	Grade 跳码
A	Body length 衣长	HPS straight down to hem edge (front). Confirm the factory uses the same basis. 由高肩点垂直量至下摆边（前片），请确认量法同原版。	0.5" 1.3 cm	25 63.5	26 66.0	27 68.6	28 71.1	+1
B	1/2 chest 1/2胸围	1" (2.5 cm) below armhole, edge to edge. 夹下1寸平量，边至边。	0.5" 1.3 cm	24.75 62.9	25.75 65.4	26.75 67.9	27.75 70.5	+1
C	Shoulder width 肩宽	Armhole seam to armhole seam, straight across. 左右袖窿骨（肩点）之间直量。	0.375" 1.0 cm	19 48.3	20 50.8	21 53.3	22 55.9	+1
D	Sleeve length 袖长	Shoulder point along top fold to sleeve hem edge. 由肩点沿袖中线量至袖口边。	0.375" 1.0 cm	10.625 27.0	11 27.9	11.375 28.9	11.75 29.8	+0.375
E	Collar width 领宽	HPS to HPS straight across. Seam to seam or inside edge? Confirm. 高肩点间直量；骨至骨或边至边，请确认。	0.25" 0.6 cm	6.5 16.5	6.75 17.1	7 17.8	7.25 18.4	+0.25
F	Collar rib height 领高	Seam to edge, at CB. 后中量，骨至边。	0.125" 0.3 cm	1 2.5	1 2.5	1 2.5	1 2.5	0
G	1/2 cuff 1/2袖口	Sleeve opening straight across, edge to edge. 袖口平量，边至边。	0.25" 0.6 cm	8.125 20.6	8.5 21.6	8.875 22.5	TBD 9 22.9 (9.25?)	+0.375
H	1/2 bottom 1/2下摆	Bottom edge straight across, edge to edge. 下摆平量，边至边。	0.5" 1.3 cm	TBD 25.75 65.4	TBD 26.75 67.9	TBD 27.75 70.5	TBD 28.75 73.0	+1
NEW POINTS FOR THIS STYLE (proposals; I, P, Q values from the factory) 本款新增量度（建议值；I、P、Q由工厂提供）								
I	Front neck drop 前领深	HPS line straight down to front neck seam at CF. 高肩点连线垂直量至前中领骨。	0.25" 0.6 cm	TBD as base	TBD as base	TBD as base	TBD as base	-
K	HPS to X top 高肩点至X上内角	HPS line straight down to the top inner-corner stitch point of the X; X centred on CF (+/-0.3 cm). Proto B (150 mm X, same centre): M = 24.9 cm. 高肩点垂直量至X上内角车线点；X居前中（±0.3cm）。B件（150mm）M码24.9cm。	0.2" 0.5 cm	TBD 9.24 23.5	TBD 9.63 24.5	TBD 10.03 25.5	TBD 10.42 26.5	+0.39
M	X size, stitch box X车线外框宽x高	Bounding box of the STITCH line (page 3), W x H. Same for all sizes. Proto B (150 mm X): 158 x 165.5 mm. 车线外框（第3页），全码相同；B件（150mm）：158 x 165.5mm。	0.125" 0.3 cm	TBD 8.19 x 8.58 20.8 x 21.8	TBD 8.19 x 8.58 20.8 x 21.8	TBD 8.19 x 8.58 20.8 x 21.8	TBD 8.19 x 8.58 20.8 x 21.8	0
N	Tape position 织带位置	Tape centre on shoulder seam, neck seam to armhole seam. 织带中线对肩缝，领骨至袖窿骨。	0.06" 0.15 cm	centred	centred	centred	centred	-
P	Armhole straight 夹直	Shoulder point straight to the underarm point, as base. 肩点直量至夹底，同原版。	0.25" 0.6 cm	TBD as base	TBD as base	TBD as base	TBD as base	as base
Q	Back neck drop 后领深	HPS line straight down to the back neck seam at CB, as base. 高肩点连线垂直量至后中领骨，同原版。	0.125" 0.3 cm	TBD as base	TBD as base	TBD as base	TBD as base	-

SIZE SPEC NOTES 尺寸说明

- Grade rules: +1" length, chest, shoulder, bottom; +0.375" sleeve and cuff; +0.25" collar; rib 0. XL half cuff (+0.125") breaks the rule: 9 or 9.25?
跳码：衣长、胸围、肩宽、下摆+1英寸；袖长、袖口+3/8英寸；领宽+1/4英寸；领高不变。XL袖口只跳1/8英寸，请确认9还是9.25。
- Use the same measuring basis as DROP 001 (length from HPS or CB, collar seam to seam or edge to edge), so both drops fit the same.
量法须与DROP 001一致（衣长由高肩点或后中量，领宽骨至骨或边至边），保证两批尺码一致。
- All values are finished garment measurements. If a garment wash is added, the chart applies after washing.
以上均为成衣尺寸；如增加成衣水洗，以洗后尺寸为准。
- X size and position are the same template for all sizes; only the distance from HPS grades (+1 cm). POM letters J, L and O are not used.
X全码同一模板，仅离高肩点距离按1cm跳码。量度代号不用J、L、O。

#	Item 物料	Description / spec 规格	Supplier 供应商	Colour / Pantone 颜色	Placement 部位	Qty / garment 单件用量
FABRICS 面料						
1	Body fabric 大身面料	TBD Single jersey. Use the DROP 001 article (XH25-IM1222-M) IF it is 100% cotton and ≥ 200 GSM (never below 50% cotton by weight: that changes the US duty class). Otherwise quote an alternative: 220-240 GSM compacted 100% cotton, same colour, and confirm whether the pattern must be adjusted for its shrinkage. Shrinkage (AATCC 135, 3 washes): length ≤ 5%, width ≤ 3% (the shoulder tape runs in the width direction and shrinks ≤ 1%). If width shrinkage above 3%: relax / compact the fabric before cutting, or adjust the pattern for the measured shrinkage. 汗布。 原版面料如为全棉且 ≥200克则沿用（棉含量不可低于50%，否则美国关税类别改变）；否则另报220-240克全棉预缩汗布，同色，并确认纸样是否需要调整。缩水率（AATCC 135，洗3次）：长≤5%，宽≤3%（肩部织带沿布宽方向，缩水≤1%）。宽缩>3%时：面料先预缩（松布/预缩机）再裁，或按实测缩率调整纸样。	Xinhui	TBD Cream = DROP 001 bulk shade (body colour to confirm) 米白，同DROP 001大货	Body, sleeves 大身、袖	As base 同原版
2	X under-patch X底布	Same jersey article, composition and GSM as body, dyed brown, pre-shrunk. Body vs brown shrinkage difference 1-2% max. Stock brown accepted if it matches. 与大身同款面料（同成分同克重），染咖啡色，预缩；两者缩水率差不超过1-2%；如有同款咖啡色现货布且缩水率相符可用	Xinhui	TBD Chocolate brown, Pantone TCX code open, lab dip 咖啡色，潘通TCX待定，须打色样	Behind X, wrong side of front 前片反面X位	1 pc, PATCH layer: box 23 x 24 cm (150 mm X: 18 x 19 cm) 1片，按PATCH图层裁
3	Neck rib 领罗纹	As base, 1" (2.5 cm) finished. 同原版，成品2.5cm	Xinhui	Match body 配大身色	Neck 领口	As base 同原版
TRIMS 辅料						
4	Checker tape 棋盘格织带	TBD Woven checker, 7.5 mm squares, 2 thin lines. Width, fibre, border and line position from founder's roll (page 5). 棋盘格提花织带，7.5mm格，两条细线；宽度、成分、边宽及细线位置以供实物为准	TBD Customer-supplied or Humen stock 客供或虎门现货	Cream + brown-black 米白+深棕黑	Both shoulder seams 两肩缝	2 pcs: 18 / 19 / 20 / 21 cm each (S-XL) 2条，每条18/19/20/21cm (S-XL)
5	Back neck tape 后领贴	As base, but extended 2 cm past each shoulder seam onto the front neckline, fully covering the checker tape end. Trim the checker tape end to 5 mm inside the neck seam allowance before attaching the rib. 同原版，但两端各过肩缝2cm至前领，完全盖住织带端口；上领前织带端修至缝份内5mm。	Xinhui	As base 同原版	Inside back neck 后领内	As base + 4 cm 原版长度+4cm
6	Backing 衬	TBD (a) No backing: two jersey layers hooped + light spray adhesive; (b) 1.5 oz fusible no-show mesh left in. Compare a and b on the swatch. No tear-away or wash-away unless the factory shows it on the swatch. (a) 不加衬：两层汗布上绷+少量喷胶；（b）1.5oz热熔网衬保留。小样对比a与b；除非工厂小样证明可行，不用网纸或水溶纸。	Xinhui	White or none 白色或无	Behind X X位	1 pc or none 1片或无
7	Thread, X outline X车线	402 spun polyester (flatbed) or 120D/2 polyester embroidery thread, 40 wt (embroidery machine); needle and bobbin. 402涤纶线或同粗绣花线（电脑绣花用120D/2），面线底线	Xinhui	TBD Proto A cream (tonal), Proto B brown-black (contrast) A件米白，B件深棕黑，大货待定	X outline X轮廓	Stitch 1.08 m (A), 0.85 m (B); thread per factory 车线1.08m (A) /0.85m (B)；用线量工厂核算
8	Thread, tape and seams 织带及缝线	As base spun polyester. 同原版	Xinhui	Tape stitch: cream (a) or brown-black (b), page 5; seams cream 织带线按第5页（a）米白或（b）深棕黑；缝线米白	Tape edges, all seams 织带边及各缝	As base 同原版
LABELS AND PACKING 唛头及包装						
9	Main label 主唛	TBD Existing CS woven label (1000 pcs ordered). If the existing woven main label says DROP 001 it cannot be used on this style; new main label artwork (no drop number, or the new drop number) from Cultsiders. 现有CS织唛（已订1000个）。如现有主唛织有DROP 001则本款不可用，需新主唛（无期数或新期数），稿件由客户提供。	Xinhui	Black / white 黑底白字	Inside CB neck 后中领内	1
10	Size + origin label 尺码产地唛	NEW. Size + MADE IN CHINA on the FRONT (visible) side, woven or printed; artwork to be sent. 新增：唛头正面（外露面）织或印：尺码+MADE IN CHINA	Xinhui	Black / white 黑底白字	Directly below main label 主唛正下方	1
11	Care / content label 洗水成分唛	TBD NEW, permanent. Fibre %, MADE IN CHINA, company name or RN, English care text (page 8). 新增：成分、产地、公司名或RN、英文洗涤说明	Xinhui	White / black 白底黑字	Wearer's left side seam 左侧骨	1
12	Polybag, hang tag 胶袋、吊牌	Existing DROP 001 package bag (500 pcs ordered), size sticker on bag. Hang tag optional (not in DROP 001). 现有胶袋（已订500个），贴尺码贴纸；吊牌可选（DROP 001没有）	Xinhui	Clear 透明	-	TBD 1 bag; tag 0 or 1
TOOLING 工装及模板						
13	Cut guide, placement template, stitch stencil 剪口模板、定位板及车线画线板	From the 1:1 template (CS-XTEE-01-X-template-1to1-PROPOSAL.pdf / DXF), all in FACE view, never mirrored or rotated: (1) cut guide (acrylic or cardboard): sheet with the CUT_JAG window cut out and the stitch line drawn on it (Proto B: STITCH_FOLLOW), so the operator can match the teeth to the stitch; (2) placement template: CF, X centre, PATCH outline; (3) slotted stitch-marking stencil on STITCH (Proto B: STITCH_FOLLOW) with CF and X centre, for flatbed sewing only. On all three: engrave FACE UP / NECK plus an arrow to the neck (layer ORIENT) and cut the non-symmetric registration notch at CF top (layer GUIDE). After stitching, trace CUT_JAG onto the cream with an air-erasable pen; cut with duck-bill scissors. 按1:1模板PDF/DXF制作，均为正面视图，不可翻转或旋转：（1）剪口模板（亚克力或硬纸板）：按CUT_JAG开窗，并画车线（B件：STITCH_FOLLOW），使锯齿对准车线；（2）定位板：前中、X中心、PATCH轮廓；（3）车线画线板（开槽，STITCH；B件：STITCH_FOLLOW），带前中及X中心，仅平车用。三者均刻FACE UP / NECK及箭头（正面朝上，箭头指领口，ORIENT图层），并在前中上端开不对称定位缺口（GUIDE图层）。车线后用气消笔沿剪口模板画线，用鸭嘴剪剪开。	Xinhui	-	X X位	1 set per X size 每个X尺寸1套
14	Embroidery program 绣花制版	Digitised from the DXF STITCH layer (Proto B: STITCH_FOLLOW, 150 mm file), face view, +Y to the neck, not mirrored. Digitising fee quoted separately. 按DXF车线图层制版（B件用150mm文件STITCH_FOLLOW图层），正面视图，+Y指向领口，不可镜像；制版费另报。	Xinhui or subcontractor 工厂或外发	-	X X位	1 per X size 每个X尺寸1个

PLEASE SEND BEFORE SAMPLING (1-6) AND FOR US IMPORT (7-9) 打样前请工厂提供（1-6）及美国进口文件（7-9）

1. DROP 001 fabric article code, composition and GSM, in writing.
DROP 001面料编号、成分及克重（书面）。

2. DROP 001 as-made measurement report, and how length and collar width are measured.
DROP 001成衣尺寸报告及衣长、领宽量法。

3. Base construction list: stitch types, hem heights, shoulder stay tape or elastic.
原版做工清单：线迹、下摆高、肩缝是否加牵条或橡筋。
4. Can the X outline run on a computerized embroidery machine? In-house or subcontract?
X轮廓能否用电脑绣花？厂内或外发？

5. Stock chocolate-brown jersey in the same article? Lab dip timing.
是否有同款咖啡色现货布？打色样时间。

6. Quote: sample fee, digitising fee, unit price with X and tape as separate lines, with and without wash, lead time.
报价：样衣费、制版费、单价（X及织带分开列，含水洗与不含水洗）、交期。
7. Fabric mill name, yarn spinner and cotton origin documents for body and brown fabric (UFLPA).
面料厂、纱厂名称及棉花产地证明（大身及咖啡色布）。

8. Composition test report, % by weight.
成分检测报告（重量百分比）。

9. Declaration: no PFAS / fluorinated finishes on fabric and tape.
面料及织带不含PFAS（无含氟整理）声明。

LABEL PLACEMENT 唛头位置

Country of origin on the FRONT side of a label at the inside centre neck, midway between the shoulder seams, next to the main label (16 CFR 303.15(b)).

产地须印在后中领内唛头的正面，位于两肩缝正中，紧挨主唛。

Care / content label: wearer's left side seam, inside, sewn into the seam.

洗水成分唛：穿着者左侧骨内，车入侧骨。

TBD Height above hem.


离下摆高度待定

Main label 主唛	TBD If the existing woven main label says DROP 001 it cannot be used on this style; new main label artwork (no drop number, or the new drop number) from Cultsiders. 如现有主唛织有DROP 001则本款不可用，需新主唛（无期数或新期数），稿件由客户提供。
Size + origin 尺码产地唛	Front: "M" / "MADE IN CHINA". Letters at least as large as other text. 正面： 尺码 / MADE IN CHINA
Care / content 洗水成分唛	TBD "100% COTTON" (confirm) + "EXCLUSIVE OF DECORATION" if tape fibre differs. "MADE IN CHINA". Company name or RN. Care text below. 成分待确认；如织带成分不同加注EXCLUSIVE OF DECORATION；产地；公司名或RN
Care text 洗涤说明	TBD MACHINE WASH COLD, INSIDE OUT / WASH WITH LIKE COLORS / ONLY NON-CHLORINE BLEACH WHEN NEEDED / TUMBLE DRY LOW / DO NOT IRON DECORATION. Final text after whole-garment wash test. 英文文字，不用ISO/GINETEX符号；成衣洗测后定稿
Rules 规定	English words, permanent. No ISO / GINETEX care symbols. No other place names on labels (if any, MADE IN CHINA must sit next to them, same size). Artwork from Cultsiders. 英文、永久性；不用ISO符号；唛头不得出现其他地名；唛头稿由客户提供

PACKING 包装

- Fold with the X flat and fully visible through the bag; no fold line across the X. 折叠时X平整完整朝外，折线不可压过X。
- Existing DROP 001 polybag; size sticker on the bag, readable without opening. 用现有胶袋，贴尺码贴纸，不开袋可见。
- Carton marks: style, colour, size breakdown, qty, carton no., G.W. / N.W., MADE IN CHINA. 外箱唛：款号、颜色、尺码配比、数量、箱号、毛净重、MADE IN CHINA。

STAGES AND APPROVAL 打样阶段及确认



Written approval at each stage. The latest released PDF governs; chat messages do not change it. Any change of fabric, thread or method needs written approval before sewing. Target: PP approved by early December 2026, before the Chinese New Year 2027 break (6 Feb).
每阶段须书面确认。以最新发出的PDF为准，聊天信息不改变工艺单。更改面料、用线或做法须先书面确认。目标：2026年12月上旬前确认产前样，赶在2027年春节（2月6日）前。

QC CHECKLIST FOR THIS STYLE 本款验货要点

- ☐ X position and symmetry vs template; centre +/-0.5 cm, on CF +/-0.3 cm.
X位置及对称，中心±0.5cm，前中±0.3cm。
- ☐ Cut-to-stitch nominal 4-7 mm (B: at the valleys). Accept ≥ 3 mm. Reject < 3 mm or any cut stitch.
剪口距车线标准4-7mm（B方案按齿谷）；≥3mm可接受；<3mm或剪断车线为次品。
- ☐ CRITICAL: any cut, nick or hole in the brown under-patch.
严重：咖啡色底布有任何剪口或破洞。
- ☐ Visible brown across each arm ≥ 12 mm (Proto B ≥ 10 mm), never narrower than the tip; teeth on the two sides staggered, not opposite. X not mirrored (compare template).
每条臂可见咖啡色≥12mm（B件≥10mm），任何位置不窄于尖端；两侧锯齿错开，不相对。X不可镜像（对照模板）。
- ☐ No runs or holes at the 4 tips and 4 inner corners.
4个尖端及4个内角无脱散、无破洞。
- ☐ Under-patch covers the window, face side out, lies flat. Edge 7-13 mm past the stitch along the arms; up to 15 mm at the 4 inner corners (and on Proto B where the stitch steps in behind a tooth) is correct per DXF.
底布盖满开口，正面朝外，平服。沿臂距车线7-13mm；4个内角处（及B件车线随锯齿内收处）可达15mm，按DXF属正常。
- ☐ X edge matches the approved swatch (A / B / C). No pucker or waves; no brown lint, dye marks or show-through on cream.
剪口效果与确认小样一致（A/B/C）；不起皱、不起波浪；米白处无咖啡色毛絮、染色或透影。
- ☐ Tape centred +/-1.5 mm, straight, same phase both sides, edge-stitch per (a) or (b), no pucker.
织带居中±1.5mm，顺直，两边花位一致，边线按（a）或（b），不起皱。
- ☐ No lump or flare at HPS; tape ends not felt from inside.
高肩点无鼓包、不外翻；内侧摸不到织带端口。
- ☐ Neck stretches over the head without broken stitches (X and tape).
领口可套头拉开，X及织带线不断。
- ☐ Measurements per size within tolerance (page 6). Labels correct.
各码尺寸在公差内（第6页），唛头正确。

TBD AQL proposal: 0 critical / 2.5 major / 4.0 minor. Photos of the X area of every piece and measurement photos per size before shipping.
AQL建议：严重0 / 主要2.5 / 次要4.0；出货前每件X位拍照，各码量尺寸拍照。

SAMPLE REQUEST AND TESTS 样衣及测试要求

- 1

SWATCH (same round as the protos, real fabrics): three edges side by side. A: freehand jag 0-3 mm inside BASE (4-7 mm from the stitch); B irregular teeth 3-8 mm deep (less where the arm narrows) at 5-15 mm spacing, staggered side to side, smooth stitch ≥ 3 mm from the deepest valley (CUT_JAG, 1:1 template); C = B + hand-brushed or sanded raw edge. Also backing a vs b and tips 10-12 mm. Photograph all after 3 washes. The swatch decides the bulk edge; both protos use edge B.
工艺小样（与头办同轮，用大货布）：三种边并排。A：BASE线内0-3mm徒手锯齿（距车线4-7mm）；B：不规则齿深3-8mm（臂变窄处更浅）、齿距5-15mm、两侧错开，车线平顺，距最深齿谷≥3mm（CUT_JAG，1:1模板）；C：B+手工磨毛边。同时对比衬a/b及尖端10-12mm。洗3次后全部拍照。小样决定大货边；两件头办均用B边。
- 2

PROTO: 2 pcs size M, both edge B, cut on CUT_JAG. Proto A = 200 x 210 mm X, cream tonal thread, smooth stitch (STITCH). Proto B = 150 mm X, brown-black thread, stitch follows jag (STITCH_FOLLOW). Real fabrics and real tape, per pages 3-5.
头办M码2件，均用B边，按CUT_JAG剪：A件200x210mm、米白同色线、车线平顺（STITCH）；B件150mm、深棕黑线、车线沿锯齿（STITCH_FOLLOW）。用大货布及实际织带，按第3-5页。
- 3

Photograph both unwashed, then home-wash only Proto B 5x (30-40°C, tumble low; photos after washes 1 / 3 / 5 of edges, corners, staining, show-through, tape pucker (pass / fail); re-measure). Keep Proto A unwashed as the reference.
两件先拍照，B件家洗5次（30-40°C，低温烘干；第1/3/5次拍X边、内角、沾色、透影、织带起皱（合格判定项），并复尺），A件不洗留底。
- 4

Stretch test on Proto B after washing: X area and neck to full extension, no broken thread.
拉伸测试（B件洗后）：X位及领口拉至最大，不断线。
- 5

TBD Brown fabric + tape: AATCC 61 2A (49°C) or ISO 105-C06 A1M (40°C), each about 5 home washes: change ≥ 4, staining on cotton ≥ 4 (target, min 3-4); GB/T 31127 joint transfer ≥ 4; AATCC 8 dry ≥ 4 / wet ≥ 3; AATCC 135, 3 cycles: length ≤ 5%, width ≤ 3% (tape ≤ 1%).
咖啡色布及织带：AATCC 61 2A（49°C）或ISO 105-C06 A1M（40°C），均约等于家洗5次：变色≥4级，棉沾色≥4级（目标，最低3-4级）；GB/T 31127拼接互染≥4级；AATCC 8干摩≥4级、湿摩≥3级；AATCC 135洗3次，长≤5%，宽≤3%（织带≤1%）。