





THIRD ANGLE PROJECTION		REVISIONS					
		REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
		OR	ECO-007104	NEW RELEASE	MAR 21	DDR	VC
		A	ECO-010633	UPDATED AS PER CURRENT TEST BOARD	NOV 21	DDR	VC
		B	ECO-019739	UPDATED TRACE AND SPACE WIDTH	OCT 23	LK	VC
				TOLERANCE ONLY NO OTHER CHANGES			

SUGGESTED MOUNTING CONFIGURATION
FOR UC2731 CASE STYLE

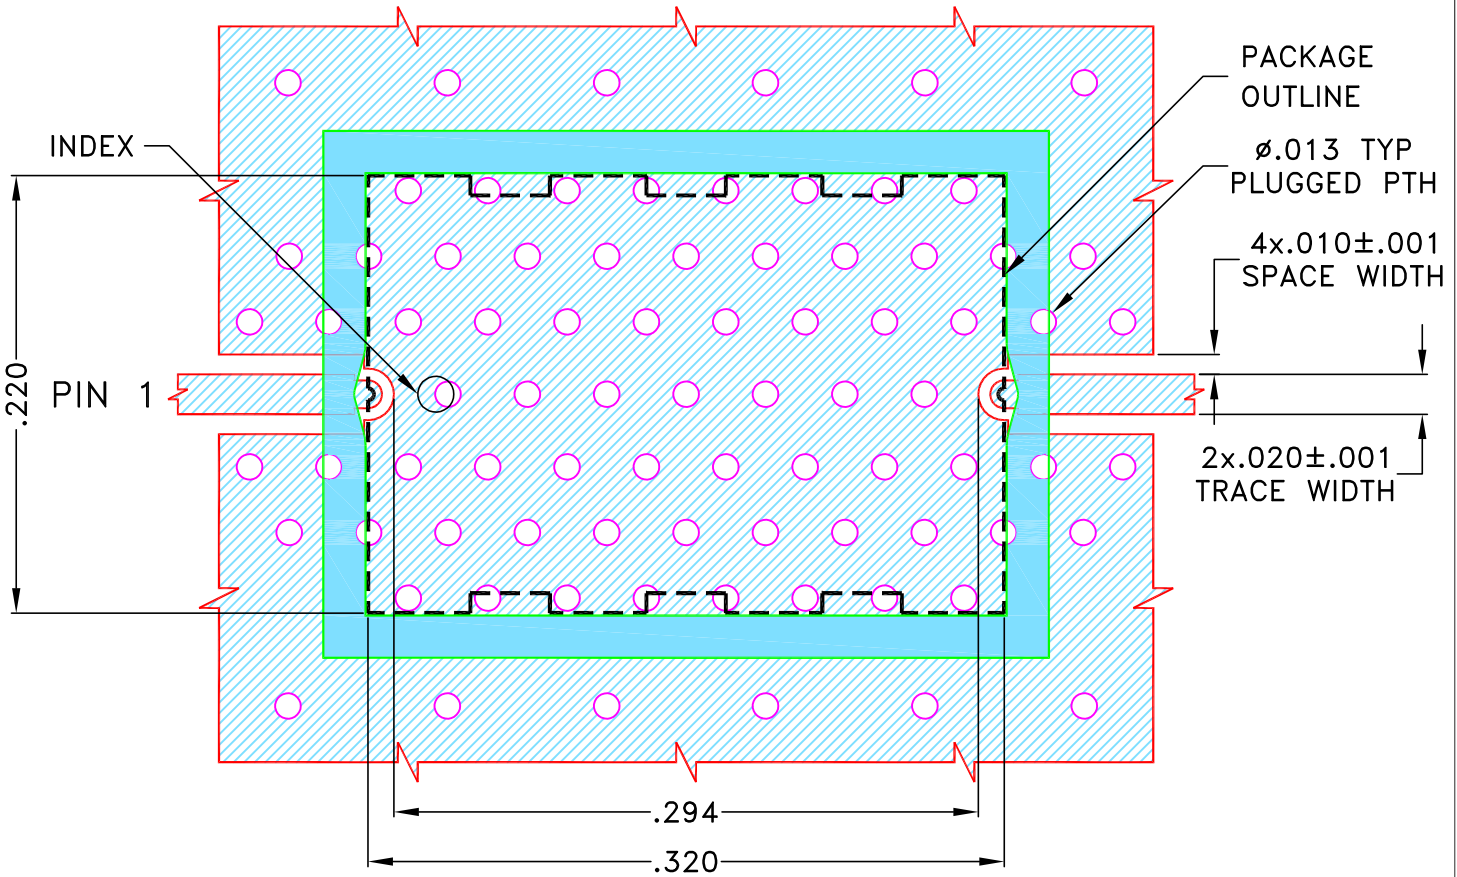

NOTES:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .010±.0010. COPPER: 1/2 Oz. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-  DENOTES PCB COPPER PATTERN WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES PCB COPPER PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED		INITIALS		DATE		<div><div></div><div>Mini-Circuits®</div><div>13 Neptune Avenue Brooklyn NY 11235</div></div>							
DIMENSIONS ARE IN INCHES		DRAWN	DDR	29 MAR 21									
TOLERANCES ON:		CHECKED	RR	29 MAR 21									
2 PL DECIMALS ±		APPROVED	NN	29 MAR 21									
3 PL DECIMALS ± .005						PL DWG, UC2731 C.S, 50 OHM, ABF							
ANGLES ±													
FRACTIONS ±													
<div><div></div>Mini-Circuits®</div> <p>THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.</p>						SIZE A		CODE IDENT 15542		DRAWING NO: 98-PL-652		REV: B	
ASHEETA1.DWG REV:A DATE:01/12/95						FILE: 98-PL-652		SCALE: 10:1		SHEET: 1 OF 1			