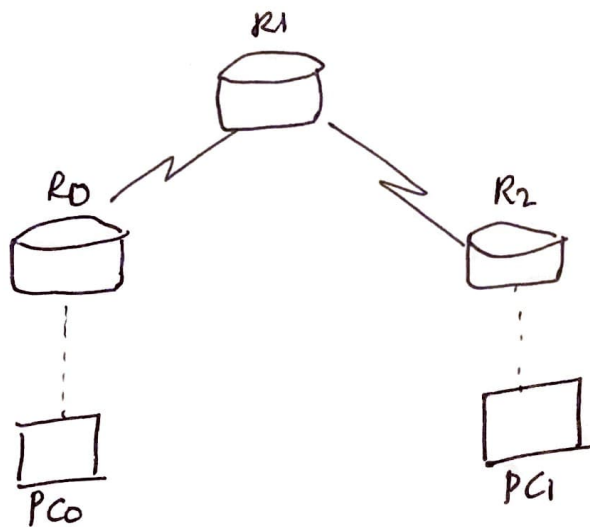Mohammed Irshan Mehkri
IBM18CS137

→ config RIP routing protocol in routers.

Topology.

Procedure

→ connect all the devices.
→ configure IP address for all PC's & routers
→ config RIP to all the routers.
→ check routing for all routers
→ ping the IP address of the PC's

Observation.

Packets sent = 4
Recieved = 3
Lost = 1
(25% Loss)