



T2.5

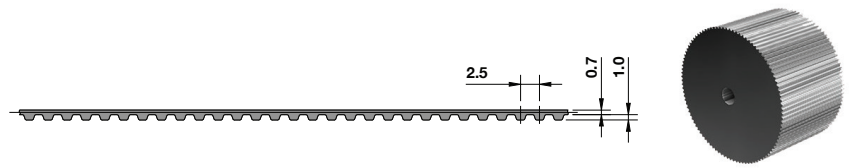


Open-Ended "M"

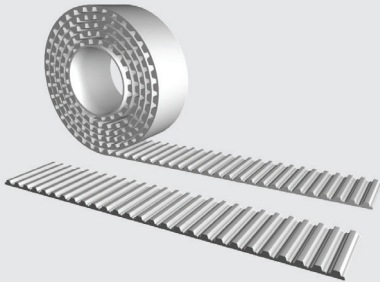

Specifications

Widths (mm) In between widths available	6	8	10	12	16	20
Lengths	Any lengths available - Stock rolls 50 meters					
Available Options	Nylon backing (PAR)					
Tension Member Options	Steel standard VA301 Stainless steel Kevlar®					

Spliced and Welded "V"

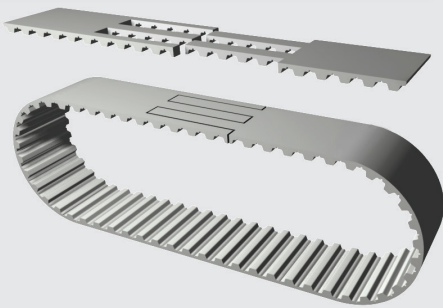

Specifications

Widths (mm) In between widths available	8	10	12	16	20
Min. Joined Length (mm) Increasing in one tooth increments	350				
Available Options	Nylon backing (PAR)				
Tension Member Options	Steel standard VA301 Stainless steel Kevlar® cord				

STANDARD LENGTHS

Pitch/Length Version	Number of Teeth	Pitch/Length Version	Number of Teeth	Pitch/Length Version	Number of Teeth
T2.5 / 120 SFX	48	T2.5 / 245 SFX	98	T2.5 / 420 SFX	168
T2.5 / 145 SFX	58	T2.5 / 250 SFX	100	T2.5 / 480 SFX	192
T2.5 / 160 SFX	64	T2.5 / 265 SFX	106	T2.5 / 500 SFX	200
T2.5 / 177.5 SFX	71	T2.5 / 285 SFX	114	T2.5 / 540 SFX	216
T2.5 / 180 SFX	72	T2.5 / 290 SFX	116	T2.5 / 620 SFX	248
T2.5 / 182.5 SFX	73	T2.5 / 305 SFX	122	T2.5 / 650 SFX	260
T2.5 / 200 SFX	80	T2.5 / 317.5 SFX	127	T2.5 / 780 SFX	312
T2.5 / 225 SFX	90	T2.5 / 330 SFX	132	T2.5 / 950 SFX	380
T2.5 / 230 SFX	92	T2.5 / 380 SFX	152	T2.5 / 1300 SFX	520

Specifications

T2.5	Pitch (mm)	Code	Ultimate Tensile Strength (N/10mm belt width)	Maximum Allowable Tensile Strength (N/10mm belt width)	
T-Series	T2.5	M	392	98	
		V	-	49	
		BFX	500	125	
Specific Belt Stiffness Steel Reinforced (Per unit width/length)		Specific Belt Mass (per 10mm belt width, steel reinforced)		Min. # of Teeth on Pulley / Flat Idler Min. Ø no back bending	Min. # of Teeth on Pulley / Flat Idler Min. Ø with back bending
2.45 x 10 ⁴ N		0.017 kg/m			
-					
3.13 x 10 ⁴ N				15 / 15mm 18 / 18mm	

Minimum Number of Pulley Teeth and Idler Diameter

Pitch (mm)	Min. # of Pulley Teeth (no back bending)	Min. # of Pulley Teeth (with back bending)	Min. Diameter of Flat Idler running on tooth side (mm)	Min. Diameter of Flat Idler running on belt back (mm)
T2.5	15	18	16	18