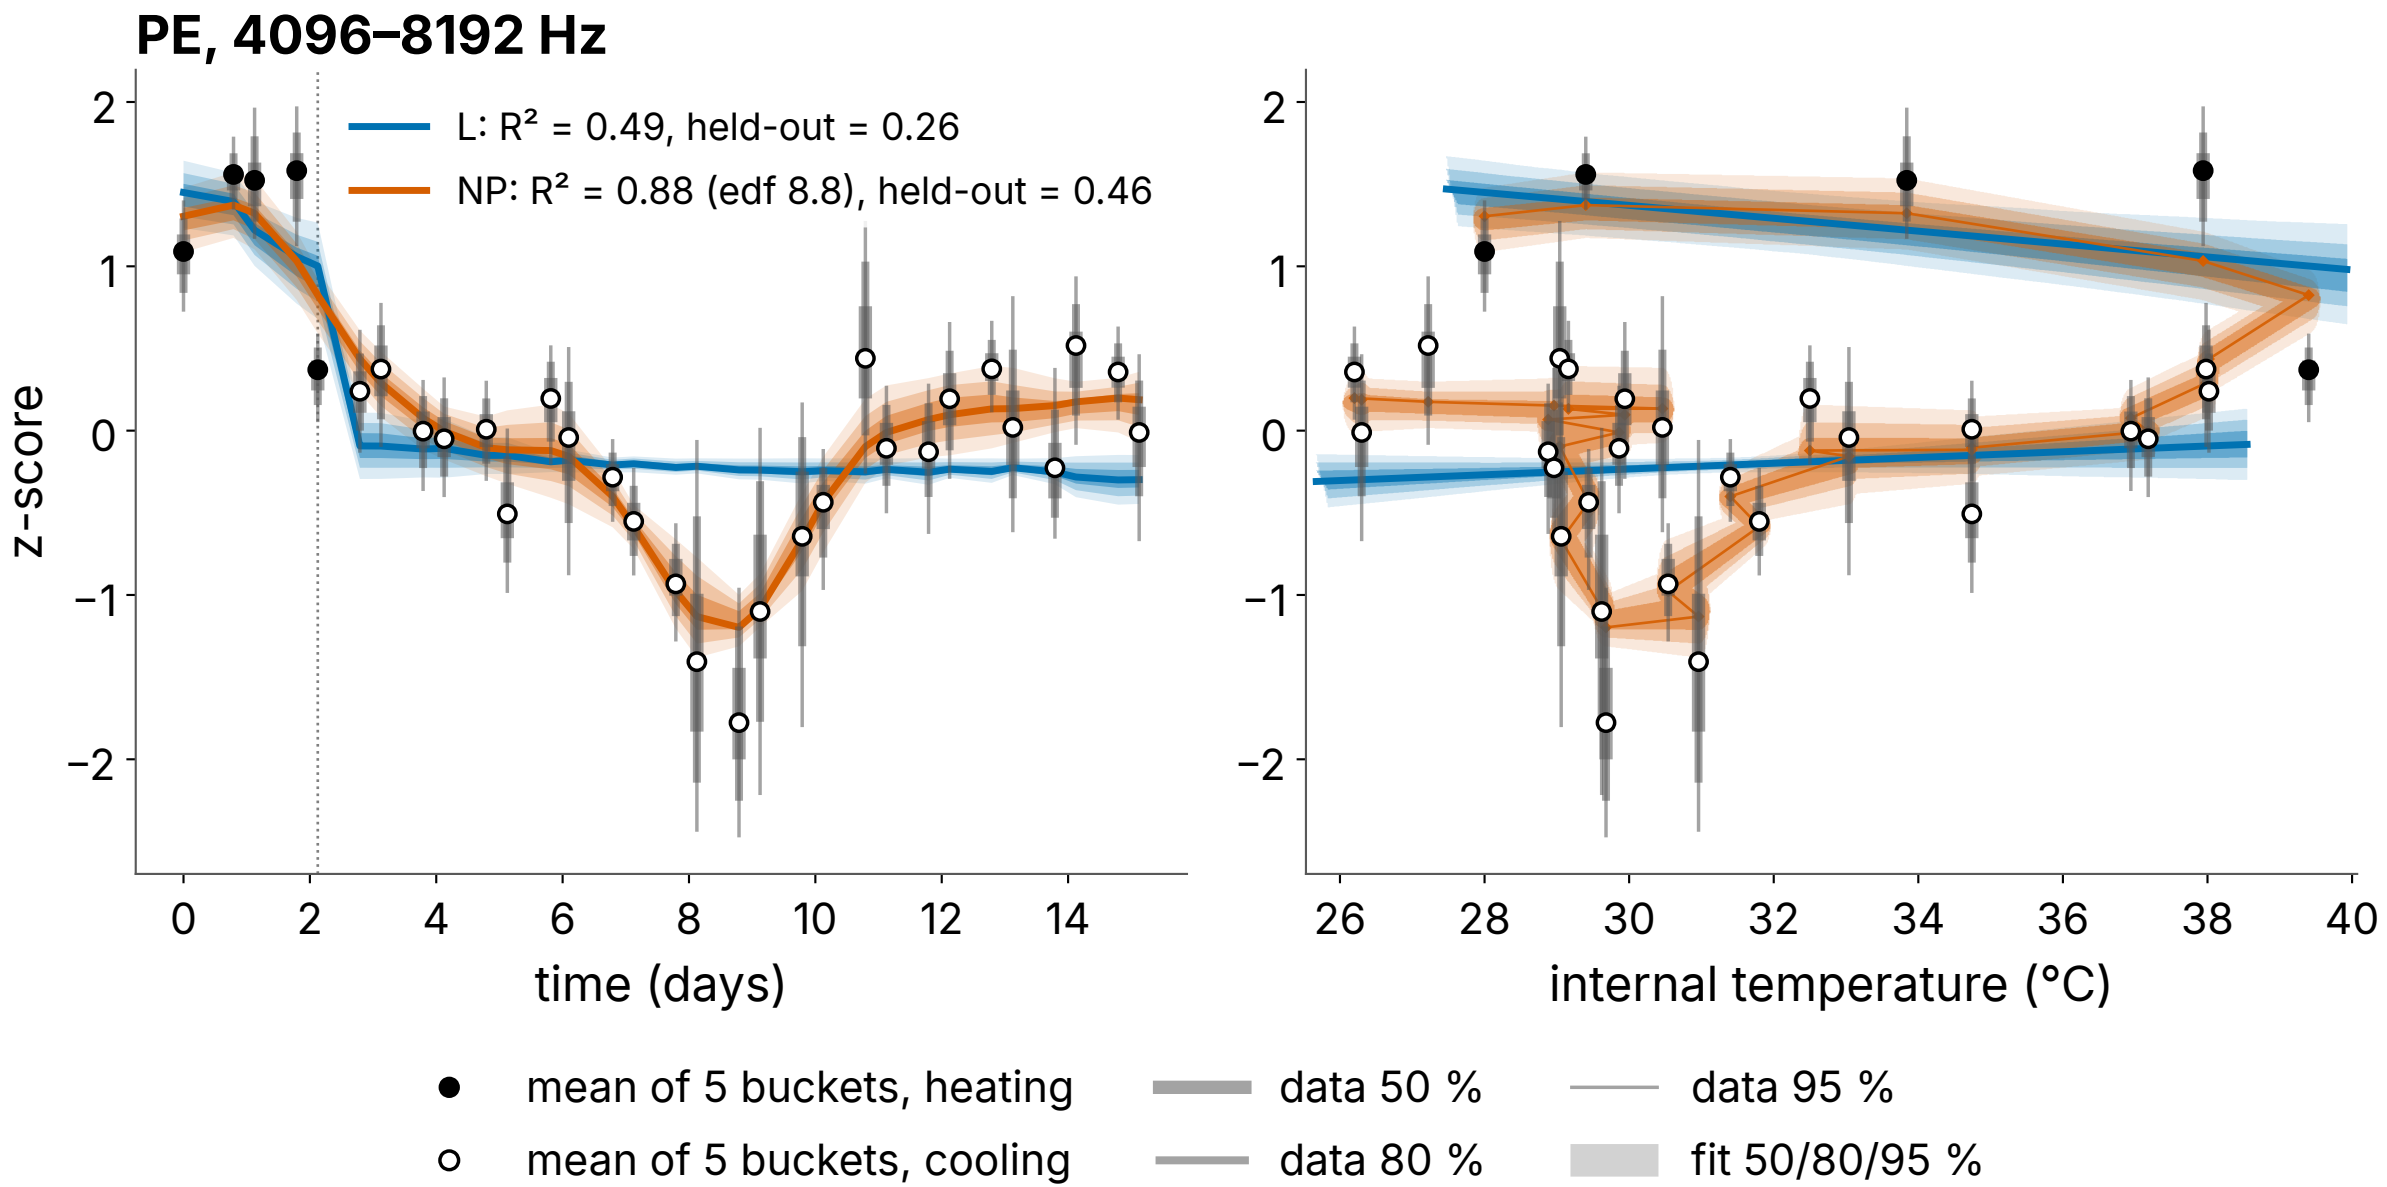

PE, 4096–8192 Hz
L: R² = 0.49, held-out = 0.26
NP: R² = 0.88 (edf 8.8), held-out = 0.46
z-score
time (days)
internal temperature (°C)
mean of 5 buckets, heating
mean of 5 buckets, cooling
data 50 %
data 80 %
data 95 %
fit 50/80/95 %