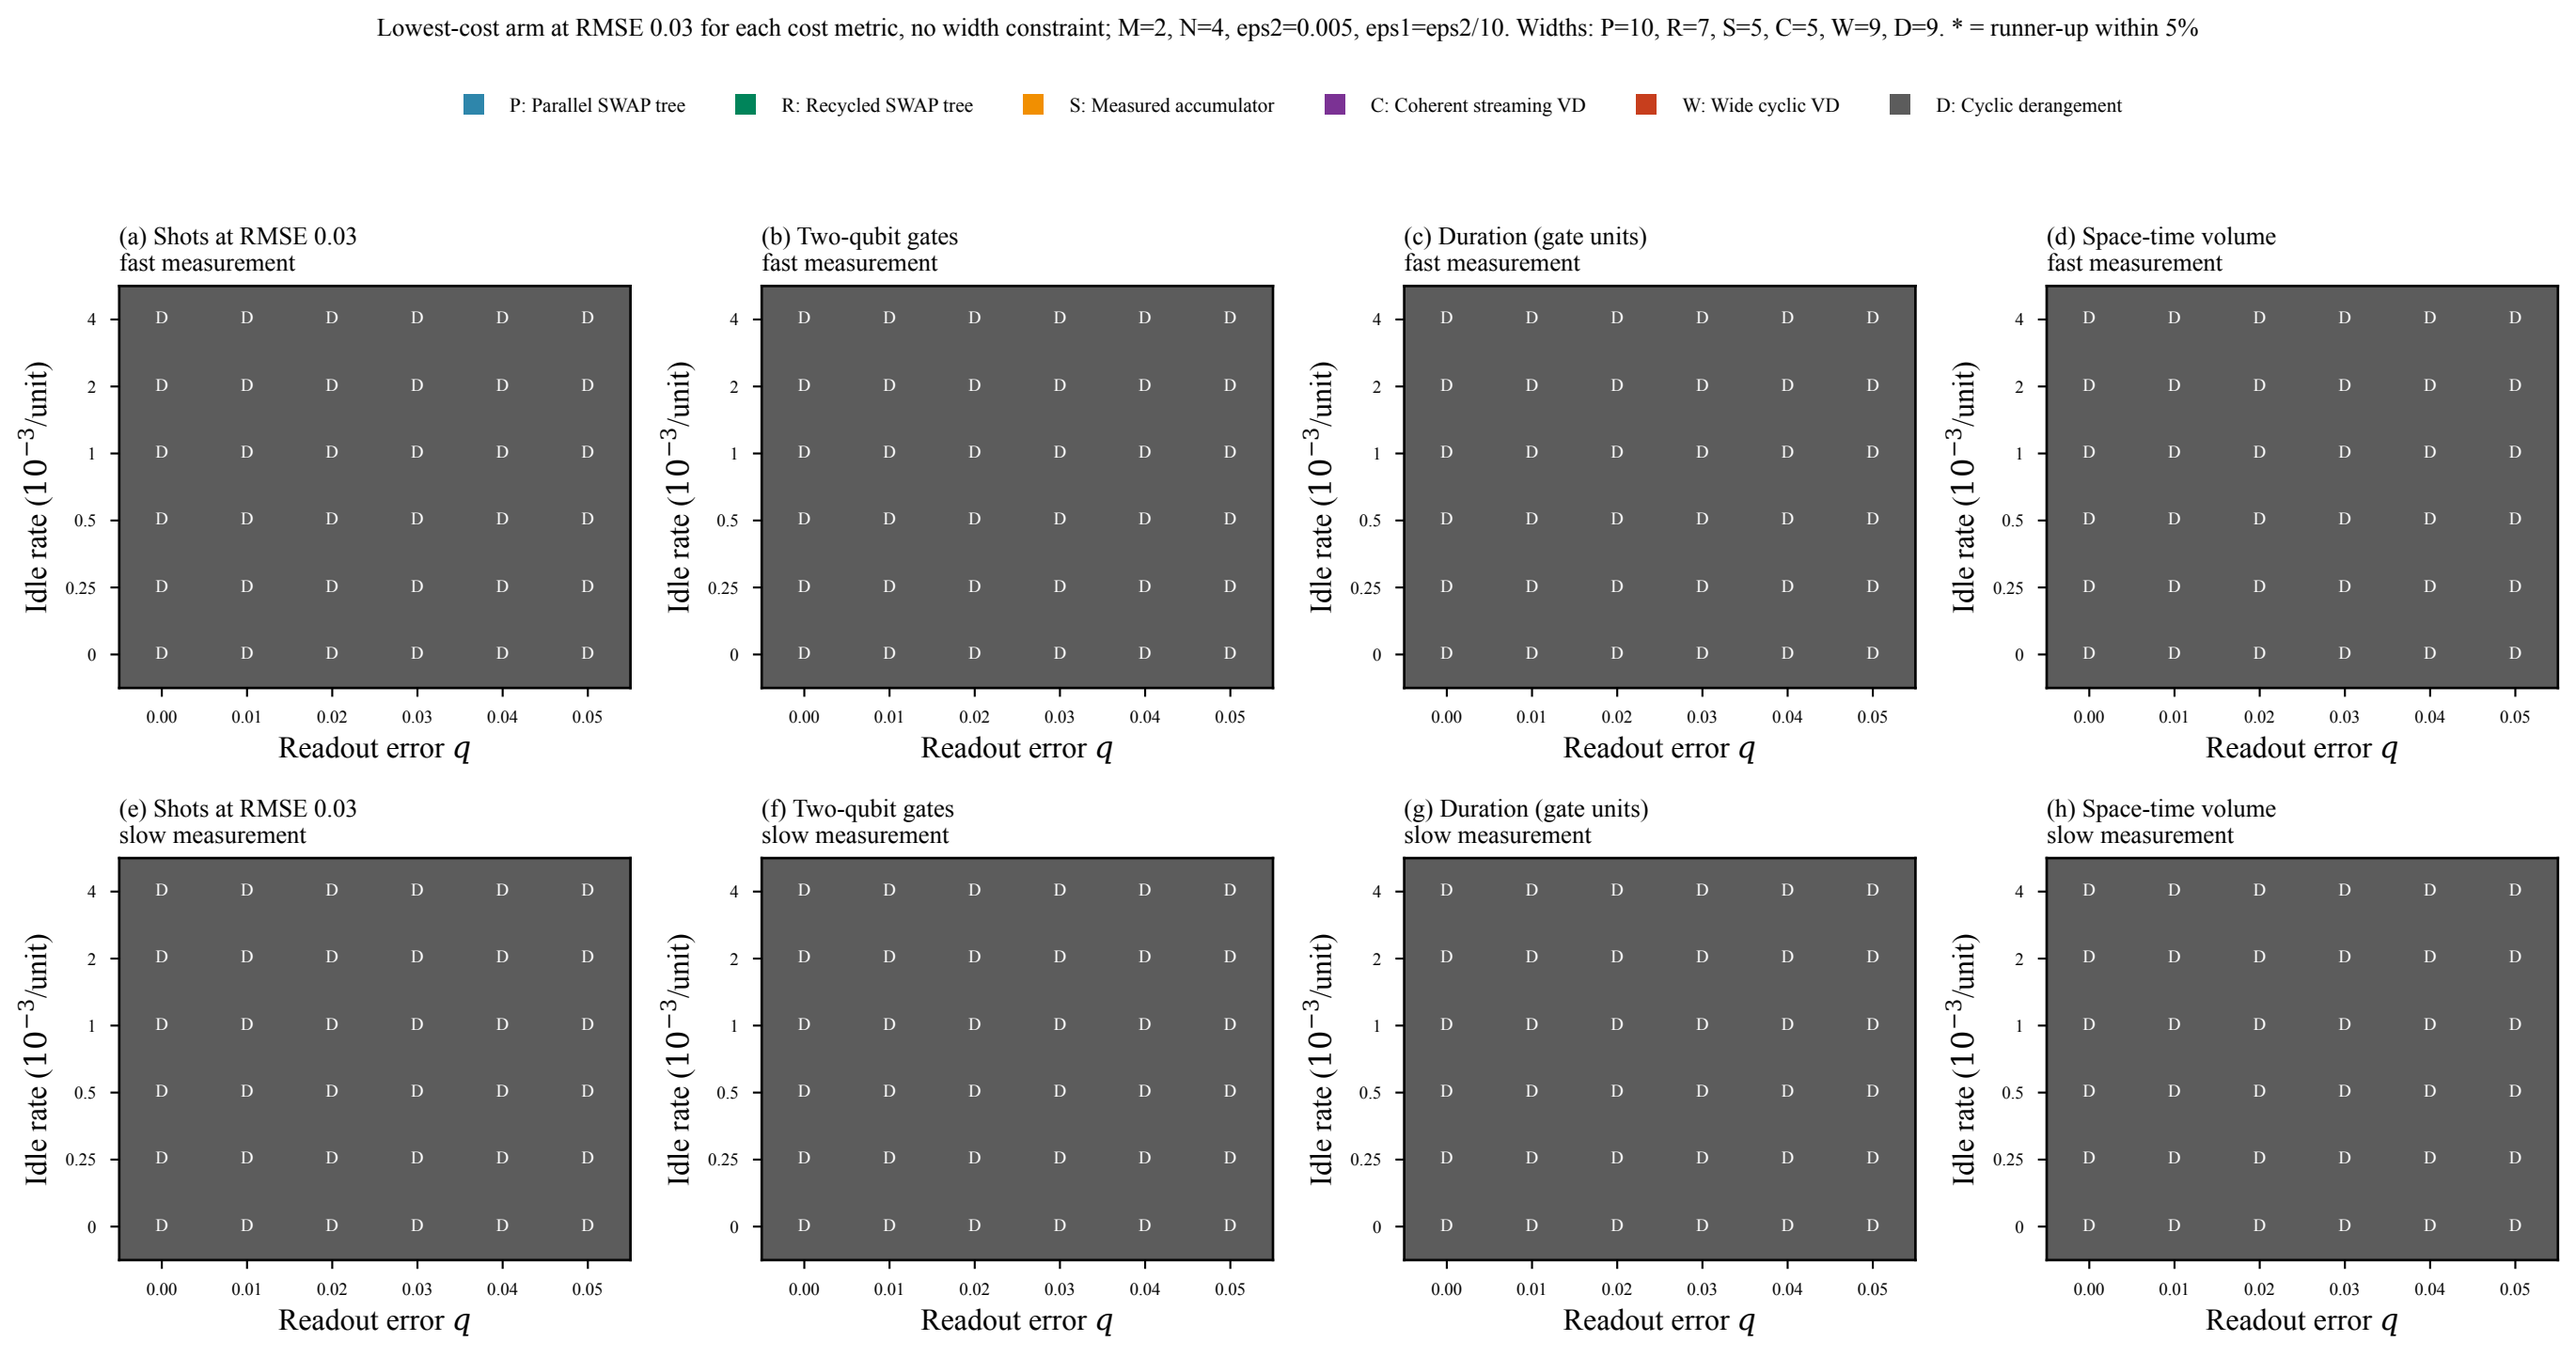
Lowest-cost arm at RMSE 0.03 for each cost metric, no width constraint; M=2, N=4, eps2=0.005, eps1=eps2/10. Widths: P=10, R=7, S=5, C=5, W=9, D=9. * = runner-up within 5%
P: Parallel SWAP tree
R: Recycled SWAP tree
S: Measured accumulator
C: Coherent streaming VD
W: Wide cyclic VD
D: Cyclic derangement
(a) Shots at RMSE 0.03
fast measurement
(b) Two-qubit gates
fast measurement
(c) Duration (gate units)
fast measurement
(d) Space-time volume
fast measurement
(e) Shots at RMSE 0.03
slow measurement
(f) Two-qubit gates
slow measurement
(g) Duration (gate units)
slow measurement
(h) Space-time volume
slow measurement
Idle rate (10^{-3}/unit)
Readout error q
0
0.25
0.5
1
2
4
0.00
0.01
0.02
0.03
0.04
0.05
D