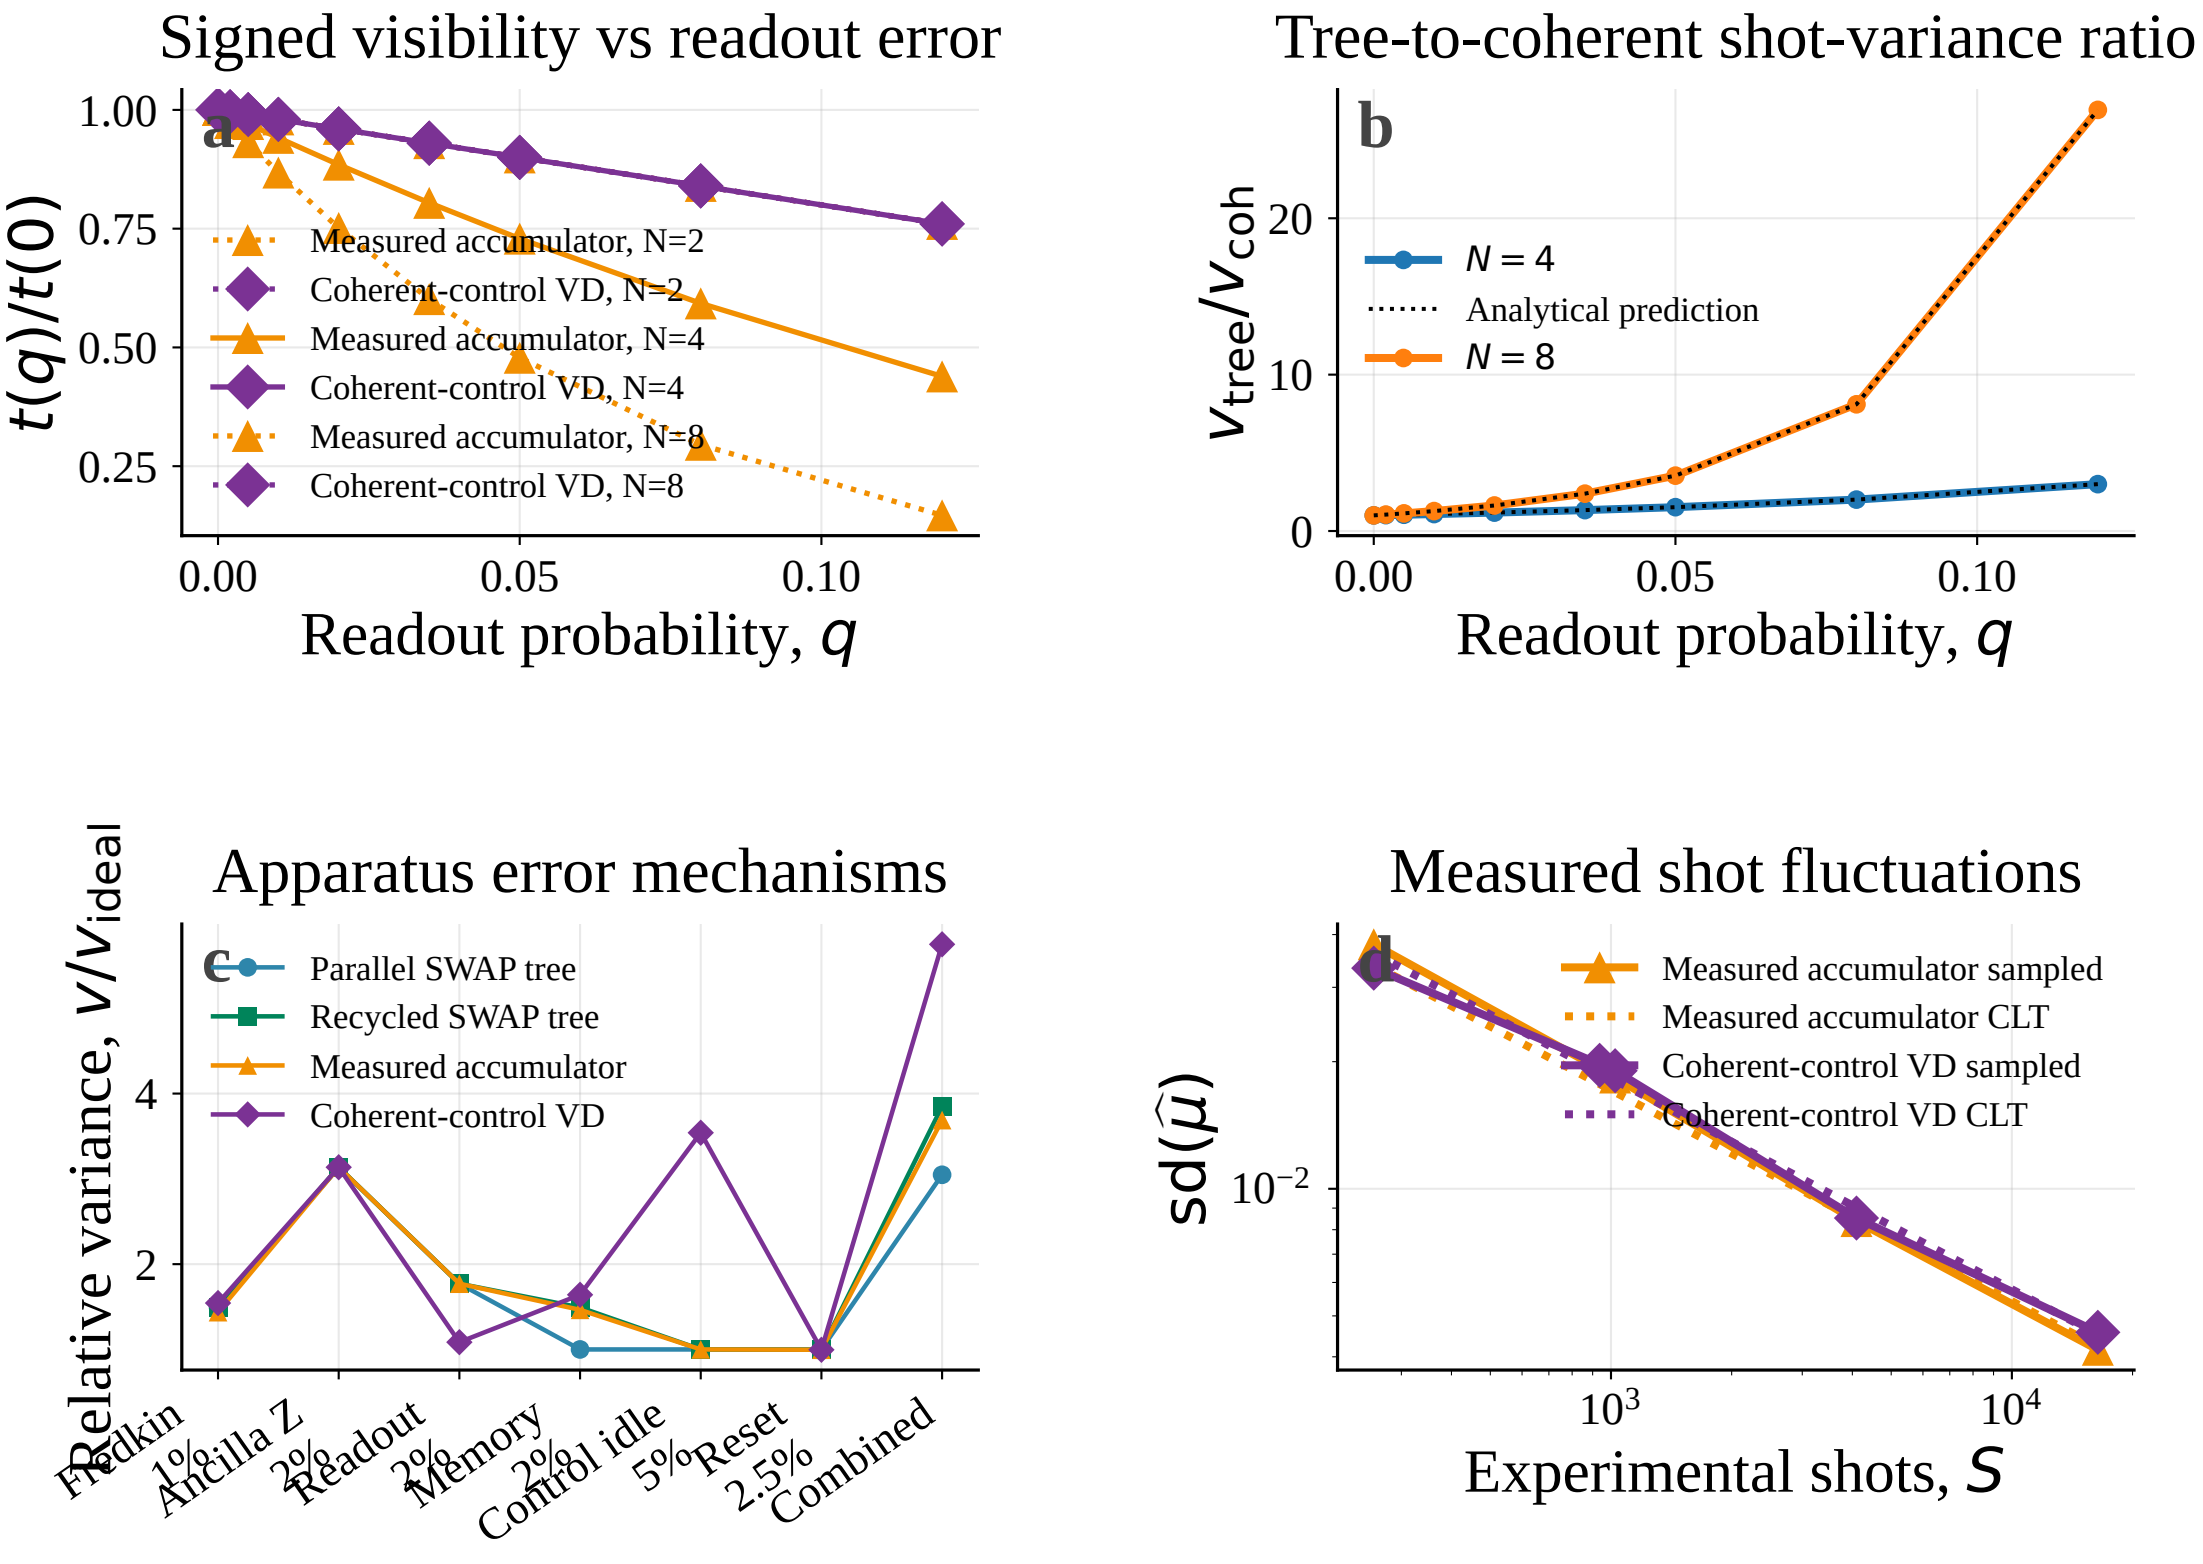
Signed visibility vs readout error
a
1.00
0.75
0.50
0.25
t(q)/t(0)
Measured accumulator, N=2
Coherent-control VD, N=2
Measured accumulator, N=4
Coherent-control VD, N=4
Measured accumulator, N=8
Coherent-control VD, N=8
0.00
0.05
0.10
Readout probability, q
Tree-to-coherent shot-variance ratio
b
20
10
0
v_tree/v_coh
N = 4
Analytical prediction
N = 8
0.00
0.05
0.10
Readout probability, q
Apparatus error mechanisms
c
Relative variance, v/v_ideal
4
2
Parallel SWAP tree
Recycled SWAP tree
Measured accumulator
Coherent-control VD
Perfect
1% Ancilla Z
2% Readout
2% Memory
2% Control idle
5% Reset
2.5% Combined
Measured shot fluctuations
d
sd(μ̂)
10^−2
Measured accumulator sampled
Measured accumulator CLT
Coherent-control VD sampled
Coherent-control VD CLT
10^3
10^4
Experimental shots, S