

# Physically Interpretable World Models for Partially Observable Driving: Encoding and Predicting the Road Environment under Weak Supervision

[AUTHOR LIST — TO BE COMPLETED BEFORE SUBMISSION]<sup>a</sup>

<sup>a</sup>*Trustworthy Engineered Autonomy (TEA) Lab, University of  
Florida, Gainesville, Florida, USA*

---

## Abstract

Learning predictive models from high-dimensional observations is fundamental for safe autonomous cyber-physical systems, yet the latent states of standard world models lack physical interpretability. Our conference work introduced the Physically Interpretable World Model (PIWM), which aligns latent representations with physical quantities and constrains their evolution through partially known dynamics under distribution-based weak supervision. That formulation assumes the vehicle state is a complete Markov description of the task, which holds for fully observable benchmarks such as CartPole and Lunar Lander but fails for driving: two vehicles with identical position, heading and speed follow divergent futures when the road ahead differs, and a forward-facing camera reveals that road only partially. This article extends PIWM to partially observable driving along three axes. First, we move to two partially observable driving case studies: a simulated top-down *CarRacing* track and a *real, physical DonkeyCar*. Second, we introduce a physically interpretable *encoding* of the road environment, factorizing the interpretable latent into a vehicle-relative component and a road-context component—lateral deviation, vehicle–road heading error and curvature—inferred from onboard images. Third, we introduce a physically interpretable *prediction* of that environment: a split-dynamics model that advances the vehicle through structured kinematics while forecasting how the road context evolves. On the physical DonkeyCar, where road context is supervised only during training and must be recovered from the front camera at test time, PIWM attains 0.267 m position error over a 100-step rollout against 0.383 m for the strongest baseline, with every state variable physically meaningful.

*Keywords:* physically interpretable world models, partial observability, autonomous driving, road-context encoding, weak supervision, trajectory prediction

---

## 1. Introduction

Accurate and robust trajectory prediction from high-dimensional sensor data is a foundational challenge for autonomous cyber-physical systems (CPS). Modern *world models* [1] address this challenge by encoding observations into compact latent representations and predicting their temporal evolution, a paradigm that has proven effective for long-horizon prediction, planning, and control [2, 3, 4]. Despite strong empirical performance, the latent states of these models typically lack a clear connection to the underlying physical state of the system. In safety-critical settings such as autonomous driving and robotics, this opacity limits trustworthiness: without interpretable states, it is difficult to detect unsafe future configurations, diagnose prediction failures, or apply formal safety-monitoring techniques [5, 6, 7].

Our prior conference work introduced the Physically Interpretable World Model (PIWM) [8], a framework that aligns latent representations with physical quantities and constrains their temporal evolution through a partially known dynamics model. PIWM defines physical interpretability through two complementary properties: the latent state must correspond to meaningful physical variables (state semantics), and its temporal evolution must follow physically consistent dynamics (temporal correctness). A key feature of PIWM is *distribution-based weak supervision*: rather than requiring precise ground-truth state labels, the method accepts state estimates in the form of sample distributions, as naturally produced by real-world sensing pipelines such as GPS or radar. Experiments on CartPole, Lunar Lander, and DonkeyCar demonstrated that PIWM recovers accurate physical parameters and achieves long-horizon prediction accuracy well beyond data-driven baselines. A systematic comparison of intrinsic versus extrinsic architectures and continuous versus discrete latent spaces showed that an extrinsic architecture with a quantized (VQ-based) latent yields the most robust and physically grounded representations.

*The challenge: driving is partially observable*

Applying PIWM to realistic driving exposes a fundamental limitation of the original formulation, and motivates the extensions in this article. On

CartPole and Lunar Lander, the system state completely specifies what will happen next: the dynamics are fully observable and Markov, so a world model that tracks the vehicle (or pole, or lander) state captures everything relevant to the future. Driving is different. Consider two vehicles with identical position, heading, and speed. If one is approaching a tight curve while the other is on a straight segment, their future trajectories diverge substantially even under the same control inputs. The vehicle’s physical state  $x_t = (x, y, \psi, v)$  does not capture this difference. The missing information is the *road context*: the shape of the lane ahead (its curvature) and the vehicle’s lateral and angular relationship to it, none of which is part of any standard vehicle-state representation. As a result, the vehicle state alone is *non-Markov* with respect to future motion: two identical states lead to different futures depending on the unobserved road geometry. Applying the original PIWM formulation to such tasks implicitly treats the system as fully observable when it is not, causing the dynamics model to learn an underdetermined, ill-posed mapping.

This challenge has two distinct facets, and overcoming each requires a separate mechanism. *(i) The road environment must be encoded.* The relevant road context is not given as a clean state vector; it is latent in the pixels and, for a forward-facing camera, only partially visible at any instant. A physically interpretable driving world model must therefore *infer* the geometry of the surrounding road from raw images, and represent it in physically meaningful terms rather than as opaque features. *(ii) The road environment must be predicted.* Long-horizon rollout requires anticipating how the road context itself evolves as the vehicle advances: the lane that is far ahead now becomes the lane the vehicle is on a few steps later. A world model that predicts only the vehicle state, treating the road as static or as noise, accumulates error rapidly because it cannot anticipate the geometry it is about to enter. Predicting the road, like encoding it, should be physically interpretable so that the forecasted environment can be inspected, trusted, and monitored.

These two facets, encoding and predicting the external environment, are precisely what distinguishes a driving world model from the vehicle-centric formulation of the conference paper, which modeled only the state of the controlled body. They are also why partial observability cannot be papered over by simply adding capacity to a black-box predictor: the missing variable is structured, physical, and causally upstream of the vehicle’s future, so it deserves an explicit, physically grounded treatment.

### *Our approach*

We resolve partial observability by reformulating the interpretable state as a structured composition of two complementary components. The *vehicle-relative state*  $z^v$  captures the ego vehicle’s displacement and heading change expressed in a local reference frame anchored at the beginning of each prediction window; this representation removes dependence on global coordinates and improves transferability across trajectories. The *road-context state*  $z^r$  captures task-relevant environmental structure: the cross-track error (lateral deviation from the lane center), the vehicle–road heading error, and the local road curvature. Together,  $(z^v, z^r)$  form a Markov description of the driving task, restoring the validity of the predictive world-model framework. The vehicle-relative component is governed by a structured kinematic model whose unknown actuation parameters are recovered during training; the road-context component is governed by a geometry-driven transition that advects the road past the vehicle as it advances, rather than treating the road as a free latent that can drift. This split-dynamics formulation provides appropriate inductive biases for each component and decouples the faster-varying vehicle motion from the slower-varying road context.

We validate the extended formulation in two new partially observable driving environments. In **CarRacing**, a top-down simulated racing environment, the road geometry is present in the image but absent from the vehicle state; the model must learn to infer and exploit road-context information from raw pixels. On the physical **DonkeyCar** platform, a real RC-scale car observes its environment through a front-facing camera and drives on a laboratory track. During training, an external localization system provides ground-truth road context as a privileged signal; at test time this signal is withheld, and the model must infer and roll out road context solely from the onboard front-facing image stream. This setup tests whether the factorized representation learned under privileged supervision transfers to the more challenging unaided real-world deployment setting. On the physical platform, over a 100-step ( $\approx 4.5$  s) rollout, PIWM with factorized state and split dynamics reaches 0.267 m position error against 0.383 m for the strongest data-driven or physics-informed baseline, and the gap widens with the horizon: the baselines diverge while PIWM stays bounded.

### *Contributions*

This journal article substantially extends the conference version [8] along three axes, which constitute its three contributions.

1. **Two partially observable driving case studies.** We move PIWM beyond the fully observable benchmarks of the conference paper to two new driving environments that are genuinely partially observable: a simulated top-down *CarRacing* track and a *real, physical DonkeyCar* platform driven on a laboratory track under onboard-camera observation. We formally characterize partial observability in driving, showing that the vehicle state is non-Markov with respect to future trajectory, and use these two case studies to demonstrate the practical consequences and the benefit of the proposed treatment.
2. **Physically interpretable encoding of the road environment.** Unlike the conference formulation, which modeled only the controlled body’s state, we model the *external environment*. We introduce a factorization of the interpretable latent into a vehicle-relative component  $z^v$  and a road-context component  $z^r$ , where  $z^r$  comprises physically meaningful descriptors of the road (cross-track error, vehicle-road heading error, and curvature). We show how to infer  $z^r$  from images using temporal context, including the forward-camera case where the road ahead is only partially visible, and how privileged supervision available only at training time can be used to learn this encoding.
3. **Physically interpretable prediction of the road environment.** We introduce a split-dynamics model that not only rolls out the vehicle with a structured kinematic model, but also *forecasts the road context* with a geometry-driven transition in which the road is advected past the vehicle by its own predicted motion. The predicted road context is itself physically interpretable, so the forecasted environment, not just the forecasted vehicle, can be inspected and monitored. We show that this geometric treatment, rather than propagating the road as a free latent, is what keeps long-horizon rollout bounded, and that the road context can be perceived from the onboard camera at a cost of roughly 2 cm in 100-step position error relative to a privileged map lookup.

Throughout, we precede the technical development of each extension with the specific challenge and motivation that makes it necessary, in keeping with the two facets of partial observability identified above.

The remainder of this article is organized as follows. Section 2 surveys related work. Section 3 reviews background on autonomous CPS, world models, and physical interpretability. Section 4 formalizes the partial observability problem in driving and introduces the factorized state. Section 5

presents the PIWM architecture, the road-context encoder (Section 5.2), and the road-context predictor (Section 5.3). Section 6 describes the experimental setup, and Section 7 reports results on the benchmarks and on the real DonkeyCar. Section 8 discusses implications and limitations, and Section 9 concludes.

## 2. Related Work

We organize the discussion into five threads relevant to physically interpretable world modeling under partial observability: trajectory prediction and safe forecasting (Section 2.1), representation learning for dynamical systems (Section 2.2), world models (Section 2.3), physics-informed and interpretable learning (Section 2.4), and partial observability, privileged learning, and road structure (Section 2.5). We close each thread by positioning PIWM against it.

### 2.1. Trajectory Prediction and Safe Forecasting

Predicting future motion is central to safe planning and control [9]. Classical predictors propagate a low-dimensional state with hand-specified models: constant-velocity and Kalman-filter formulations for vehicle motion [10], and Hamilton–Jacobi reachability for sets of reachable states with formal guarantees [11, 12, 13]. These methods are transparent and certifiable, but they require an explicit dynamical model and a low-dimensional state, and they scale poorly to high-dimensional camera observations.

Learning-based predictors instead forecast directly from data. Social-pooling and generative sequence models capture multi-agent interaction [14, 15, 16], while graph- and attention-based models such as Trajectron++ achieve strong forecasting by conditioning on scene graphs and high-definition maps [17]. Hybrid schemes embed classical filters inside learned models, as in learned Kalman filtering [18]. These models, however, depend on hand-crafted scene representations or HD-map annotations that are unavailable in many settings [19, 20], and their internal states carry no physical meaning.

A parallel line equips predictors with reliability guarantees without altering the predictor itself: conformal prediction and calibrated forecasting bound error or coverage [21, 22, 23, 24]; statistical model checking and predictive monitoring estimate the probability of property violations [25, 26, 27, 28]; and runtime and misbehavior monitors flag unsafe behavior online [29, 30,

31, 32]. These techniques are complementary to ours: they wrap a predictor with guarantees but do not make its latent state physically meaningful. Compared with this body of work, PIWM learns interpretable representations directly from raw images under weak supervision, without handcrafted scene representations or test-time state labels, so that the forecast itself, both the vehicle and the road around it, can be inspected.

## 2.2. Representation Learning for Dynamical Systems

Compact latent representations underpin learning from high-dimensional observations, from classical autoencoders [33] to variational autoencoders (VAEs) [34], but standard objectives impose no physically meaningful structure. A large literature seeks more structured latents by encouraging disentanglement [35, 36, 37], causal structure [38, 39], or object-centric and slot decompositions [40]. Discrete VQ-VAEs regularize the latent through a learned codebook [41, 42]; PIWM builds on this quantization but, unlike it, ties codebook components to physical values. These methods improve organization or modularity, yet none guarantees correspondence to measurable physical quantities.

Closer to physical grounding, several models steer latents toward physics. GOKU-Net restricts latent variables to plausible physical ranges without binding them to specific quantities [43]; SPARTAN produces semantically structured outputs but incorporates neither known dynamics nor action-conditioned prediction [44]; Deep Variational Bayes Filters add latent state-space dynamics to VAEs [45] but, absent physical supervision, do not recover interpretable variables; and continuous-time models such as Neural ODEs learn smooth but uninterpretable latent dynamics [46]. Representation learning specialized for pixel-based control improves downstream performance [47] while again leaving the latent opaque. Compared with these approaches, PIWM explicitly aligns latent dimensions with named physical quantities of both the vehicle and the surrounding road, and constrains their evolution with known physics under only weak, distribution-based supervision.

## 2.3. World Models

World models learn latent dynamics for imagination-based planning and control. The Dreamer and PlaNet line learns recurrent latent state-space models from pixels [48, 49, 3]; transformer- and masked-prediction world models improve sample efficiency and long-horizon fidelity [2, 4, 50]; and a range of variants explore alternative latent factorizations [1, 51, 52]. These

models excel empirically but learn latent spaces with no clear physical meaning, which limits inspection and safety monitoring.

For driving, recent world models predict rich structured futures such as 3D occupancy grids or rendered scenes [53, 54, 55, 56], improving forecasting realism but still without aligning the internal state to physical variables, and at substantial annotation and compute cost. Neuro-symbolic world models improve generalization but require predefined symbolic inputs unavailable from raw sensors [57, 58]. The closest prior work, Vid2Param, recovers physical parameters from video [59] but requires full supervision and provides no explicit world model for long-horizon rollout. Compared with these approaches, PIWM recovers physical state under weak supervision and rolls it forward through interpretable dynamics, and, new in this article, it does so for the external road environment, not only the controlled body.

#### *2.4. Physics-Informed and Interpretable Learning*

A complementary thread injects physics directly into learning. Sparse identification of nonlinear dynamics and differentiable-physics or end-to-end system identification recover governing equations or parameters [60, 61, 62], while physics-informed neural networks embed differential constraints in the loss [63, 64]. Within world modeling, physical priors have been added as bounds on states and actions [65, 66], physics-aware losses [67], kinematics-inspired layers [68], and Taylor-monomial-structured latent dynamics (Phy-Taylor) [69].

Most of these methods assume access to the underlying low-dimensional state and are not designed for raw visual inputs, or they enforce physical plausibility without yielding a state that names specific quantities. PIWM differs in two ways aligned with this article’s contributions: it extracts the physical state from images under weak supervision, so that physics can be applied without ground-truth labels, and it applies a structured, learnable physical model, a bicycle model for the vehicle and a geometry-driven transition for the road, to roll the interpretable state forward. Compared with physics-informed predictors that model only the controlled body, PIWM applies interpretable physical structure to the external environment as well.

#### *2.5. Partial Observability, Privileged Learning, and Road Structure*

Partial observability is a long-standing challenge in robotics and reinforcement learning, classically formalized through partially observable Markov



decision processes and belief-state planning [70, 71]. Model-free agents commonly cope with it by adding memory through recurrent or temporal architectures: recurrent policy gradients [72], gated recurrent networks [73], convolutional LSTMs for spatiotemporal inputs [74], and temporal convolutional networks [75]. These approaches recover an opaque belief or memory state; they do not produce a physically interpretable estimate of the missing environmental variables, which is exactly what our road-context state provides.

When information needed for learning is available only at training time, privileged-information and teacher–student learning supervise a model that must operate without it at deployment [76, 77]. This is the mechanism we use on the real DonkeyCar: ground-truth road context from training-time track localization teaches the encoder what to extract, while the deployed car observes only its front camera and must reconstruct that context from images.

In driving specifically, a substantial literature encodes lane and road structure in learned representations [17, 19], but typically requires explicit maps or HD annotations; and physics-based predictors apply kinematic or dynamic bicycle models to low-dimensional state vectors [78] rather than to learned image representations. Learning-based control has also been demonstrated on RC-scale physical cars, including imitation and reinforcement learning on platforms akin to the DonkeyCar [79, 80], but without an interpretable predictive world model. Compared with all of the above, our work is, to our knowledge, the first to integrate a factorized vehicle–road representation with a physics-informed world model trained from images under weak supervision, and to both *encode* and *predict* the road environment in physically interpretable terms.

### 3. Preliminaries

#### 3.1. Autonomous CPS and World Models

**Definition 1** (Autonomous CPS). *An autonomous CPS  $s = (X, I, Y, A, \phi_\theta, g, h)$  models the evolution of an observation-based control system, where  $X$  is the physical state space,  $I \subset X$  the set of initial states,  $Y$  the observation space,  $A$  the action space,  $\phi_\theta : X \times A \times \Theta \rightarrow X$  the dynamics with unknown parameters  $\theta \in \Theta$ ,  $g : X \rightarrow Y$  the observation function, and  $h : Y \rightarrow A$  the controller.*

The true state evolves as  $x_{t+1} = \phi(x_t, a_t, \theta^*)$ , where  $\theta^*$  are the unknown true parameters. The controller selects actions from observations:  $a_t = h(y_t) = h(g(x_t))$ . A world model serves as a learned surrogate for forecasting future observations.

**Definition 2** (World Model). *A world model  $\mathcal{W} = (\mathcal{E}, f, \mathcal{D})$  predicts the future evolution of observations in an autonomous CPS  $s$ , where  $\mathcal{E} : Y \rightarrow Z$  encodes observations into latent representations,  $f : Z \times A \rightarrow Z$  predicts future latents, and  $\mathcal{D} : Z \rightarrow Y$  reconstructs predicted observations.*

Conventional world models are evaluated by predictive accuracy in image space (e.g., MSE or SSIM). However, low image error does not imply that the underlying predicted state is physically meaningful: similar-looking frames can correspond to very different physical configurations. For safety monitoring and planning, what matters is not only visual fidelity but whether the latent state can be interpreted as a physical quantity and evolved according to physically plausible dynamics.

### 3.2. Physical Interpretability

Following the conference paper [8], we define *physical interpretability* via two complementary properties:

1. the latent representation  $z^*$  corresponds to meaningful physical variables (state semantics), and
2. its temporal evolution follows physically consistent dynamics (temporal correctness).

Property 1 requires alignment between the latent and the physical state, which PIWM enforces through weak supervision. Property 2 requires that multi-step rollouts of the latent state obey the known equations of motion, which PIWM enforces through the structured dynamics model.

**Definition 3** (Interpretable Representation Learning Problem). *Given a dataset  $\mathcal{S} = \{(y_{1:M}, a_{1:M}, \Xi_{1:M})\}_{1:N}$ , where  $\Xi_t = \{\xi_t^{(l)}\}_{l=1}^L$  are samples drawn from an unknown supervisory distribution  $p(x_t)$ , and a controller  $h$ , learn a latent encoder  $\mathcal{E}$  such that the mean squared error between the physical state  $x_t$  and the encoded latent  $z_t^* = \mathcal{E}(y_t)$  is minimized:*

$$\min_{\mathcal{E}} \mathbb{E}[\|x_t - \mathcal{E}(y_t)\|_2^2]. \quad (1)$$

The supervisory samples  $\Xi_t$  are drawn from an unknown distribution  $p(x_t)$  with no assumed parametric form; we only require that the distribution is *mean-proximal*, meaning its mean lies within a relative interval of width  $\delta$  around the true value (see Section 6.2 for the precise noise model). This is a strictly weaker assumption than standard supervised learning with precise labels, and represents the uncertainty naturally arising from real-world sensing.

## 4. Partial Observability in Driving

This section formalizes the challenge introduced in Section 1: in driving, the vehicle state is not a sufficient statistic for the future. The formalization motivates the factorized state that the rest of the article encodes (Section 5.2) and predicts (Section 5.3).

### 4.1. Why Vehicle State Is Insufficient for Driving

The PIWM conference paper formulated physical interpretability under the implicit assumption that the vehicle’s physical state  $x_t$  provides a complete, Markov description of the system: knowing  $x_t$  and action  $a_t$  determines  $x_{t+1}$ . This assumption holds for CartPole, Lunar Lander, and other low-dimensional benchmark tasks, where the system state encodes all task-relevant information. It fails for driving tasks.

In a driving task, the vehicle state  $x_t = (x, y, \psi, v)$  (position, heading, speed) does not encode the geometry of the road ahead. The actual lane-following dynamics of the vehicle depend on this geometry:

$$x_{t+1} = \phi(x_t, r_t, a_t, \theta^*), \quad (2)$$

where  $r_t$  denotes the *road-context state*, which includes quantities such as the lateral deviation from the lane center, the vehicle’s heading relative to the road tangent, and the local curvature. The road-context component  $r_t$  is not directly observed by the onboard camera and is not part of any standard vehicle-state representation.

**Definition 4** (Partial Observability in Driving). *A driving task is partially observable with respect to world modeling if the vehicle state  $x_t$  alone is not sufficient to determine future motion; equivalently, if there exist two system configurations  $(x_t, r_t^{(1)})$  and  $(x_t, r_t^{(2)})$  with  $r_t^{(1)} \neq r_t^{(2)}$  such that, under the same controller  $h$ , the resulting trajectories satisfy  $x_{t+1:T}^{(1)} \neq x_{t+1:T}^{(2)}$ .*

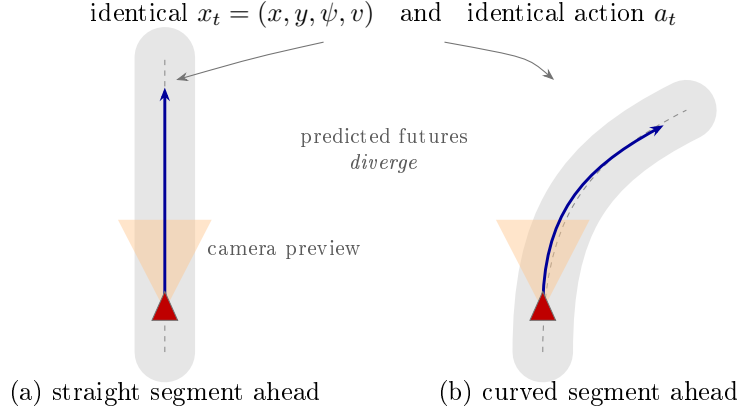


Figure 1: Partial observability in driving. Two vehicles with identical kinematic states  $(x, y, \psi, v)$ , issued identical actions, follow divergent futures because the road geometry ahead differs. The vehicle state alone is therefore non-Markov: the road context  $r_t$  (lane shape and the vehicle’s relation to it) is missing from it and, for a forward-facing camera, the road is visible only over a short preview (shaded wedge), so  $r_t$  must be both encoded from images and predicted forward.

Figure 1 illustrates this definition. Two vehicles at identical positions on the track, with the same speed and heading, enter different road segments (one straight, one curved). Despite identical vehicle states and identical control actions, the predicted future trajectories diverge, because the curvature of the upcoming road introduces a lateral displacement that the vehicle-state-only dynamics cannot anticipate. Standard PIWM, which learns a single interpretable state aligned with  $x_t$ , cannot represent this difference. Two consequences follow, corresponding to the two facets of the challenge from Section 1: the model must *encode*  $r_t$  from observations (Section 5.2), and it must *predict* how  $r_t$  evolves over the horizon (Section 5.3).

#### 4.2. Factorized Interpretable State

To resolve the partial observability problem, we augment the interpretable state with road-context information and express the vehicle component in a translation- and rotation-invariant reference frame.

*Vehicle-relative state.* Global coordinates  $(x, y)$  introduce unnecessary dependence on the starting position of each trajectory, complicating generalization across scenes. Instead, we express vehicle motion relative to the initial timestep of each prediction window. For a window beginning at time  $t_0$ , the

vehicle-relative state is:

$$z_t^v = \begin{bmatrix} \cos(\psi_{t_0}) (x_t - x_{t_0}) + \sin(\psi_{t_0}) (y_t - y_{t_0}) \\ -\sin(\psi_{t_0}) (x_t - x_{t_0}) + \cos(\psi_{t_0}) (y_t - y_{t_0}) \\ \psi_t - \psi_{t_0} \end{bmatrix} = \begin{bmatrix} x_{\text{rel}} \\ y_{\text{rel}} \\ \psi_{\text{rel}} \end{bmatrix}. \quad (3)$$

This transformation rotates the global displacement into the local frame of the vehicle at  $t_0$ , so that  $x_{\text{rel}}$  is the longitudinal displacement,  $y_{\text{rel}}$  the lateral displacement, and  $\psi_{\text{rel}}$  the cumulative heading change.

*Road-context state.* The road-context component  $z_t^r$  captures the vehicle's relationship to the road geometry:

$$z_t^r = \begin{bmatrix} e_{\text{CTE}} \\ e_\psi \\ \kappa \end{bmatrix}, \quad (4)$$

where  $e_{\text{CTE}}$  is the cross-track error (signed lateral distance from the lane center),  $e_\psi$  is the heading error (difference between the vehicle's heading and the road tangent at its current position), and  $\kappa$  is the local road curvature. Together,  $z_t^r$  encodes the information needed to determine how the vehicle will interact with the road geometry over the coming steps.

*Factorized state.* The complete *factorized interpretable state* is:

$$z_t^* = [z_t^v, z_t^r] \in \mathbb{R}^6. \quad (5)$$

The pair  $(z_t^v, z_t^r)$  satisfies the Markov property under the true augmented dynamics (2): knowing the current factorized state and the action is sufficient to determine the next state, up to the unknown parameters  $\theta^*$ .

#### 4.3. Extended Learning Problem

The learning problem for partially observable driving extends the original PIWM formulation as follows.

**Problem 1** (Interpretable State Learning under Partial Observability). *Given a dataset  $\mathcal{S} = \{(y_{1:M}, a_{1:M}, \Xi_{1:M}^v, \Xi_{1:M}^r)\}_{1:N}$  where  $\Xi_t^v$  and  $\Xi_t^r$  are supervisory samples for the vehicle-relative and road-context components respectively, and a controller  $h$ , learn a factorized encoder such that  $z_t^v = \mathcal{E}^v(y_{1:t})$  approximates the vehicle-relative state and  $z_t^r = \mathcal{E}^r(y_{1:t})$  approximates the road-context state, while the pair  $(z_t^v, z_t^r)$  supports accurate future prediction under the task dynamics.*

Two aspects distinguish this from the conference formulation, and they map directly onto the two extensions developed next. First, the encoder is conditioned on a *history*  $y_{1:t}$  rather than a single frame: road context cannot be inferred from a single image (particularly in the front-camera setting) and requires temporal context (Section 5.2). Second, the supervision is split:  $\Xi_t^v$  can often be computed directly from the vehicle state (available in simulation or via external localization), while  $\Xi_t^r$  requires knowledge of the road geometry. In the real DonkeyCar experiments, road-context supervision is available only at training time and withheld at test time, so the encoder must learn to recover road context from images alone (Section 5.2), and the predictor must roll it forward (Section 5.3).

## 5. PIWM Architecture

The PIWM architecture retains the core structure from the conference version [8], comprising a physically interpretable autoencoder and a learnable dynamics model, and extends it with the factorized state along two axes: a road-context *encoder* (Section 5.2) and a road-context *predictor* (Section 5.3). A high-level overview is shown in Figure 2.

### 5.1. Learning Interpretable Representations

The autoencoder maps high-dimensional observations to a physically interpretable latent state aligned with the true physical state. We follow the conference paper in considering two architectural approaches.

*Intrinsic encoding.* The encoder  $\mathcal{E} : Y \rightarrow Z^*$  maps an observation directly to the interpretable latent, partitioned as  $z^* = [z_p^*, z_v^*]$ , where  $z_p^*$  is the physically interpretable component and  $z_v^*$  captures the residual visual information needed for reconstruction. For continuous latent spaces, the objective follows a  $\beta$ -VAE formulation with interpretability alignment applied to  $z_p^*$ :

$$\mathcal{L}_{\text{intrinsic-cont}} = \mathcal{L}_{\text{recon}}(y, \hat{y}) + \lambda_{\text{interp}} \mathcal{L}_{\text{interp}}(z_p^*, \Xi) + \beta D_{\text{KL}}(q(z_v^*|y) \parallel \mathcal{N}(0, I)). \quad (6)$$

For discrete latent spaces, the codebook is partitioned so that each entry  $\mathbf{e}_k = [\mathbf{e}_k^p, \mathbf{e}_k^v]$  has a fixed physical component and a learnable visual component. The interpretability loss is applied to the averaged physical part of the selected codebook entries.

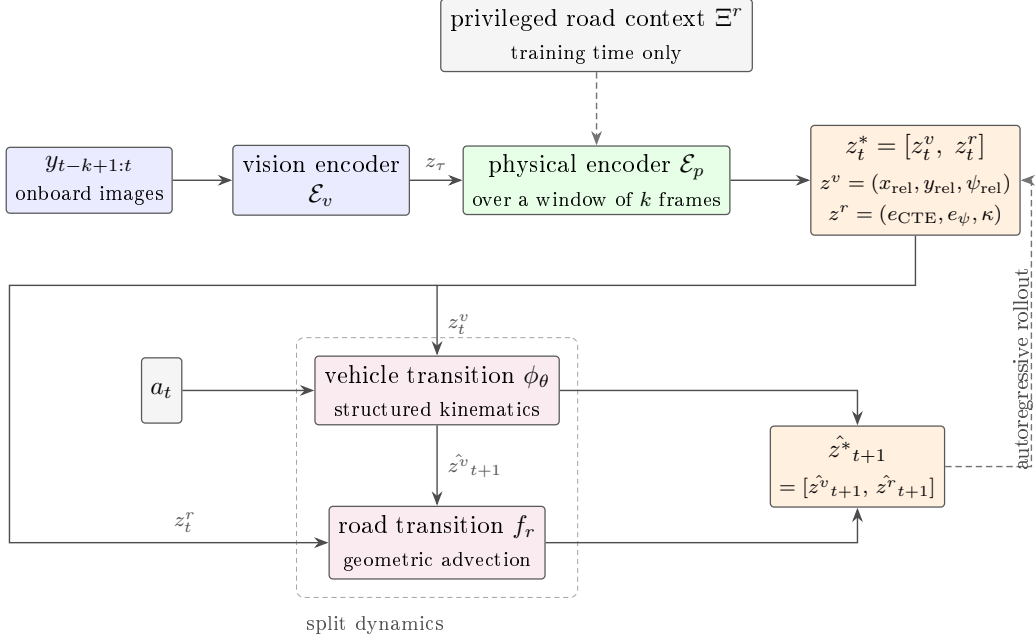


Figure 2: Overview of the PIWM architecture for partially observable driving. A vision encoder maps each observation to a visual latent; a physical encoder aggregates a temporal window of those latents into the factorized interpretable state  $z^* = [z^v, z^r]$ , where  $z^v$  is the vehicle-relative state and  $z^r$  the road context. A split-dynamics model then rolls the state forward: the two components are advanced by *separate* transitions,  $z^v$  by a structured kinematic model and  $z^r$  by a geometry-driven one, and the predicted components recombine into  $\hat{z}_{t+1}^*$ . Their only coupling is the arrow labelled  $\hat{z}_{t+1}^v$ —the road is advected by the vehicle’s own predicted motion, which is also why the action  $a_t$  enters the vehicle branch alone. The encoder (Section 5.2) infers the external road environment from images, supervised at training time by a privileged signal that is withheld at test time; the predictor (Section 5.3) forecasts how that environment evolves.

*Extrinsic encoding.* The extrinsic approach decouples visual perception from physical interpretation via a two-stage process. In the first stage, a vision autoencoder  $(\mathcal{E}_v, \mathcal{D}_v)$  is trained on image reconstruction only, producing an intermediate latent  $z = \mathcal{E}_v(y)$ . For continuous variants this is a  $\beta$ -VAE; for discrete variants a VQ-VAE with a 512-entry codebook. In the second stage, the vision encoder is frozen and a physical encoder  $\mathcal{E}_p$  is trained to map  $z$  to the interpretable state  $z^* = \mathcal{E}_p(z)$ , optimizing:

$$\mathcal{L}_{\text{physical}} = \lambda_{\text{interp}} \mathcal{L}_{\text{interp}}(z^*, \Xi) + \lambda_{\text{latent}} \mathcal{L}_{\text{recon}}(z, \mathcal{D}_p(z^*)). \quad (7)$$

The physical encoder  $\mathcal{E}_p$  maps the temporal latent sequence to the factorized state  $z^* = [z^v, z^r]$  (Section 5.2).

*Which encoder for driving.* The conference paper’s systematic comparison found that the extrinsic approach with a discrete (VQ) latent gave the strongest physical grounding and prediction accuracy, and it would be natural to carry that configuration over here. We do not, and the reason is worth stating rather than glossing: that comparison was run on *fully observable* benchmarks, where the quantity to be encoded is the controlled body’s own state and a single frame nearly determines it. The road-context encoder faces a different problem—reading the geometry of the scene ahead out of a short, partially informative image window—so the conference ranking is an extrapolation, not a result. We therefore tested it directly, implementing the claimed configuration (per-frame convolutional encoder, a 512-entry VQ bottleneck, and a Transformer with self-attention over the temporal window) at matched capacity and training it to convergence on the same data as the encoder we ship. It is worse on both the perception task and the downstream rollout, by  $0.071 \text{ m}^{-1}$  of curvature error and 8 mm of 100-step position error (Table 2). The driving experiments therefore use a convolutional encoder over the stacked window with a linear curvature head, trained from scratch on the road-context objective; the VQ–Transformer variant is reported as a baseline. Section 7.3 returns to why the two differ so much less downstream than they do at perception.

*Interpretability loss.* For all variants, alignment between the encoded state and the physical variables is enforced through the mean squared error to the empirical mean of the supervisory samples:

$$\mathcal{L}_{\text{interp}}(z^*, \Xi) = \|z^* - \hat{\mu}_\Xi\|_2^2, \quad \hat{\mu}_\Xi = \frac{1}{L} \sum_{l=1}^L \xi^{(l)}. \quad (8)$$

When applied to the factorized state, this loss is evaluated separately on the vehicle-relative and road-context components with supervision from  $\Xi^v$  and  $\Xi^r$ :

$$\mathcal{L}_{\text{interp}}^{\text{drive}} = \lambda_v \mathcal{L}_{\text{interp}}(z^v, \Xi^v) + \lambda_r \mathcal{L}_{\text{interp}}(z^r, \Xi^r). \quad (9)$$

The separate weighting of the road-context term  $\lambda_r$  reflects its central role: it is the term that forces the encoder to commit capacity to the external environment rather than only to the vehicle.



## 5.2. Encoding the Road Environment

*Challenge and motivation.* The conference model encoded only the controlled body’s state, which for the benchmarks was directly inferable from a single frame. Road context is different in two ways. First, it is a property of the *environment*, not the agent, so it must be read off the scene rather than the vehicle’s appearance. Second, for a forward-facing camera it is only *partially visible*: at any instant the camera sees a limited stretch of road, and quantities such as the curvature of the lane the vehicle is about to enter are not fully determined by the current frame. A single-frame encoder is therefore insufficient; the road context must be aggregated over time.

*Temporal road-context encoder.* We condition the physical encoder on a history of visual latents:

$$(z_t^v, z_t^r) = \mathcal{E}_p(z_{t-k+1:t}), \quad z_\tau = \mathcal{E}_v(y_\tau), \quad (10)$$

where  $k$  is the context-window length. Conditioning on a window rather than a frame is what makes the road context identifiable: as the vehicle advances, geometry that was previously seen far ahead becomes the geometry the vehicle is on, so the window supplies the parallax and motion cues that disambiguate cross-track error, heading error and curvature, which a single frame leaves ambiguous. In practice we realize  $\mathcal{E}_p$  convolutionally, with the  $k$  frames of the window entered as input channels and a linear curvature head on the pooled features; a self-attention alternative over the same window was evaluated and did not help (Table 2). The encoder produces both components jointly but supervises them separately through (9), ensuring  $z_t^r$  carries genuine environmental information rather than being absorbed into the vehicle component.

*Privileged supervision for real-world deployment.* On the real DonkeyCar, the road context cannot be measured by the deployed car itself. We therefore use *privileged supervision*: during training, an external localization system (a known track map together with the logged car pose, as is also obtainable from an overhead camera) provides ground-truth road context  $\Xi^r$  for each frame; at test time this signal is withheld and the deployed car observes only its front camera. The encoder (10) is thus trained to predict, from the onboard image stream alone, the road context that the privileged signal supplied during training. This is precisely a teacher–student / learning-from-privileged-information setup [76]: the privileged road context teaches the

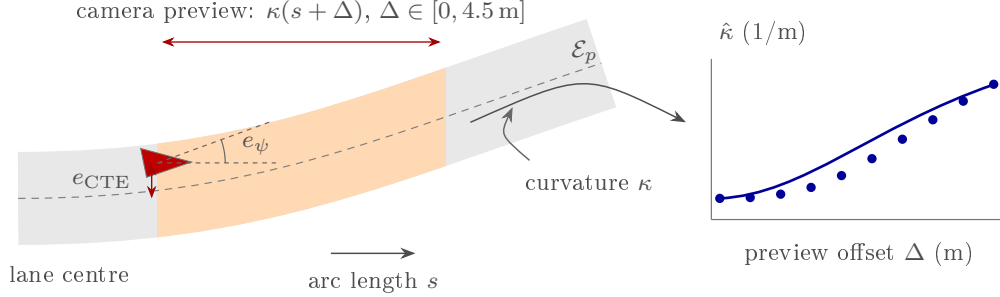


Figure 3: Encoding the road environment. The road-context state  $z^r = (e_{\text{CTE}}, e_\psi, \kappa)$  is defined geometrically with respect to the lane centre: the cross-track error is the signed lateral offset, the heading error is the angle between the vehicle heading and the road tangent, and  $\kappa$  is the local curvature. For a forward-facing camera the road is visible only over a short preview (shaded), so the physical encoder  $\mathcal{E}_p$  aggregates a temporal window of images into a curvature *profile*  $\hat{\kappa}(s + \Delta)$  sampled at ten offsets over the first 4.5m ahead. On the real DonkeyCar this encoding is supervised by privileged track localization at training time and recovered from the front camera alone at test time.

encoder what to extract, and at deployment the encoder reconstructs it from images. Because  $z^r$  is physically interpretable, the recovered road context can be inspected and compared against the true lane geometry, which we use as a diagnostic in Section 7.

### 5.3. Predicting the Road Environment

*Challenge and motivation.* Encoding the road at the current step is necessary but not sufficient. To roll out a trajectory over a long horizon without new observations, the world model must anticipate how the road context itself changes as the vehicle advances: the curve that is ahead now is underfoot a few steps later, and the cross-track and heading errors evolve as the vehicle tracks (or departs from) the lane. A model that predicts only the vehicle state, holding the road context fixed or ignoring it, drifts quickly because it steers the predicted vehicle through a road that no longer matches reality. We therefore make road prediction an explicit, physically interpretable part of the dynamics.

*Split dynamics.* We use a *split-dynamics* model that advances the vehicle and the road context with separate, physically appropriate transitions:

$$\hat{z}_{t+1}^v = \phi_\theta(z_t^v, a_t), \quad (11)$$

$$\hat{z}_{t+1}^r = f_r(z_t^r, z_t^v, \hat{z}_{t+1}^v; \theta_r). \quad (12)$$

The vehicle transition  $\phi_\theta$  is a structured kinematic model with a small learned actuation map (below); the road transition  $f_r$  is a geometry-driven model (below). Note which arguments  $f_r$  does and does not take. It consumes the vehicle’s *motion over the step*—the state before and after the vehicle update—and not the action: the road context is advected by how far and how the vehicle actually moved, so an action influences the road only through its effect on that motion. This is what makes the second equation a transport rule rather than a second learned dynamics model, and it is the reason  $\hat{z}_{t+1}^v$  appears on the right-hand side even though the two transitions are otherwise independent. Splitting the dynamics decouples the fast-varying vehicle motion from the slow-varying road geometry and lets each receive its correct inductive bias.

*Structured kinematics for the vehicle.* For driving environments we replace the generic second-order dynamics of the conference paper with a wheeled-vehicle kinematic prior. In the body frame this is the classical *bicycle kinematic model*

$$x_{t+1} = x_t + v_t \cos(\psi_t + \beta_t) \Delta t, \quad (13)$$

$$y_{t+1} = y_t + v_t \sin(\psi_t + \beta_t) \Delta t, \quad (14)$$

$$\psi_{t+1} = \psi_t + \frac{v_t}{l_r} \sin(\beta_t) \Delta t, \quad (15)$$

with slip angle  $\beta_t = \arctan\left(\frac{l_r}{l_f + l_r} \tan(\delta_{f,t})\right)$ , where  $l_f$  and  $l_r$  are the distances from the centre of mass to the front and rear axles (unknown and learned during training),  $\delta_{f,t}$  is the steering angle,  $v_t$  the longitudinal speed and  $\psi_t$  the heading.

Because the road context is itself defined relative to the lane (Section 4.2), we express the vehicle in the same road-aligned frame, which yields the equivalent kinematics (17)–(19) below and lets the two branches of the split dynamics share one geometry. In either frame the *pose* kinematics are analytic; what is unknown is how the commanded action drives the vehicle. We therefore learn only a compact actuation map

$$v_{t+1} = v_t + g_\theta^v(z_t^v, z_t^r, a_t), \quad \omega_{t+1} = \omega_t + g_\theta^\omega(z_t^v, z_t^r, a_t), \quad (16)$$

where  $g_\theta^v$  and  $g_\theta^\omega$  are small multilayer perceptrons mapping throttle to longitudinal acceleration and steering to yaw acceleration. Every remaining quantity in the vehicle branch is a physical variable propagated by an analytic equation.

*Structured road-context transition.* The road-context state  $(e_{\text{CTE}}, e_\psi, \kappa)$  evolves slowly and geometrically. As the vehicle moves by the increment implied by its predicted motion, the road ahead is effectively re-indexed: the lane geometry is advected past the vehicle. We therefore model  $f_r$  as a geometry-driven transition that (i) updates the cross-track and heading errors from the vehicle’s predicted lateral and angular motion relative to the road, and (ii) does *not* integrate the curvature forward at all, but re-reads it from the already-perceived preview at the arc length the vehicle has covered.

Concretely, we work in a road-aligned (Frenet) frame in which the vehicle state is  $(s, e_{\text{CTE}}, e_\psi, v, \omega)$ , with  $s$  the arc length along the lane centre,  $v$  the longitudinal speed and  $\omega$  the yaw rate. Writing  $\kappa_t = \hat{\kappa}(s_t)$  for the perceived curvature at the current arc length and  $\eta_t = 1 - e_{\text{CTE},t} \kappa_t$  for the Jacobian of the road-aligned parameterization, the transition is

$$s_{t+1} = s_t + \frac{v_t \cos e_{\psi,t}}{\eta_t} \Delta t, \quad (17)$$

$$e_{\text{CTE},t+1} = e_{\text{CTE},t} + v_t \sin e_{\psi,t} \Delta t + \varepsilon_{\theta_r}^d, \quad (18)$$

$$e_{\psi,t+1} = e_{\psi,t} + \left( \omega_t - \kappa_t \frac{v_t \cos e_{\psi,t}}{\eta_t} \right) \Delta t + \varepsilon_{\theta_r}^\psi, \quad (19)$$

$$\kappa_{t+1} = \hat{\kappa}(s_{t+1}), \quad (20)$$

where  $\Delta t$  is the sampling interval and  $(\varepsilon_{\theta_r}^d, \varepsilon_{\theta_r}^\psi)$  is a small learned residual, tightly bounded, that corrects effects the rigid geometric update misses (e.g., imperfect lane tracking). Equations (17)–(19) are analytic; only the residual and the actuation map (16) are learned.

Equation (20) is the crucial one. The curvature is a *lookup into the curvature profile already perceived at the start of the rollout* (Section 5.2), indexed by how far the predicted vehicle has travelled. It is therefore not a free latent that the dynamics must propagate, and it cannot accumulate error over the horizon: the road is *observed* once and then re-indexed, not extrapolated. This is the structural reason the rollout stays bounded, and it is what distinguishes the model from world models that carry the road as an unconstrained latent that drifts and, in turn, corrupts the vehicle branch that consumes it. The preview is long enough for this to be well defined: over a 100-step rollout the vehicle covers on average 3.3 m of arc length (4.45 m at the 90th percentile), inside the 4.5 m perceived preview. Because  $f_r$  operates on the physically interpretable  $z^r$ , the forecasted road context at any horizon is itself interpretable: the model outputs a predicted lane geometry that can be visualized and checked, not an opaque feature.

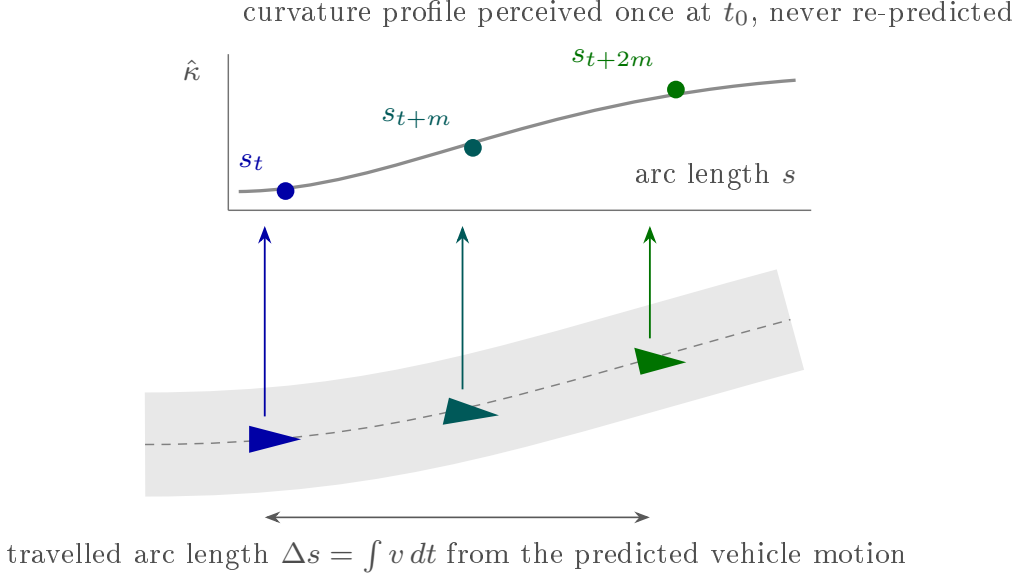


Figure 4: Predicting the road environment. The curvature profile ahead is perceived once, at the start of the rollout; as the vehicle advances, the road context is *advected* past it, i.e. the profile is re-indexed by the arc length the predicted vehicle motion has covered, and the cross-track and heading errors are updated from the vehicle’s lateral and angular motion relative to the road. A small learned residual corrects effects the rigid geometric update misses. Because the road is re-indexed rather than propagated as a free latent, it cannot drift over a long horizon, and because  $z^r$  stays physically interpretable, the forecasted lane can be inspected at every step.

#### 5.4. Training Procedure

Training follows a staged pipeline. Stage 1 trains the vision autoencoder  $(\mathcal{E}_v, \mathcal{D}_v)$  on image reconstruction. Stage 2 trains the physical encoder  $\mathcal{E}_p$  to produce the factorized interpretable state, optimizing (9) jointly with a latent reconstruction term. Stage 3 trains the split-dynamics models ( $\phi_\theta$  for the vehicle and  $f_r$  for the road context), with an optional end-to-end fine-tuning pass that updates the encoder and dynamics together to align the encoded state with what the dynamics can predict. Algorithm 1 summarizes the procedure.

---

**Algorithm 1** PIWM training for partially observable driving.

---

**Input:** Training set  $\mathcal{S}$ , loss weights  $\lambda_v, \lambda_r, \lambda_{\text{latent}}$ , context length  $k$

- 1: Train vision autoencoder  $(\mathcal{E}_v, \mathcal{D}_v)$  on image reconstruction
  - 2: **for** each batch  $(y_{1:M}, a_{1:M}, \Xi_{1:M}^v, \Xi_{1:M}^r)$  **do**
  - 3:    $z_t \leftarrow \mathcal{E}_v(y_t)$  for all  $t$
  - 4:    $(z_t^v, z_t^r) \leftarrow \mathcal{E}_p(z_{t-k+1:t})$   $\triangleright$  encode vehicle and road (Sec. 5.2)
  - 5:   Update  $\mathcal{E}_p$  with  $\lambda_v \mathcal{L}_{\text{interp}}(z_t^v, \Xi_t^v) + \lambda_r \mathcal{L}_{\text{interp}}(z_t^r, \Xi_t^r) + \lambda_{\text{latent}} \mathcal{L}_{\text{recon}}$
  - 6: **end for**
  - 7: **for** each batch **do**
  - 8:   Obtain  $(z_t^v, z_t^r)$  from the encoders
  - 9:    $\hat{z}_{t+1}^v \leftarrow \phi_\theta(z_t^v, a_t)$   $\triangleright$  bicycle model
  - 10:    $\hat{z}_{t+1}^r \leftarrow f_r(z_t^r, z_t^v, \hat{z}_{t+1}^v; \theta_r)$   $\triangleright$  road prediction (Sec. 5.3)
  - 11:   Update  $\theta$  (bicycle) and  $\theta_r$  (road) on the multi-step rollout loss  $\|\hat{z}_{t+1}^v - \hat{\mu}_{\Xi_{t+1}^v}^v\|^2 + \|\hat{z}_{t+1}^r - \hat{\mu}_{\Xi_{t+1}^r}^r\|^2$
  - 12: **end for**
  - 13: (Optional) End-to-end fine-tune  $\mathcal{E}_p, \phi_\theta, f_r$  jointly
  - 14: **return** trained model parameters
- 

## 6. Experimental Evaluation

### 6.1. Environments and Evaluation Tiers

We evaluate across three tiers of increasing difficulty. Tier 1 establishes continuity with the conference paper; Tiers 2 and 3 are the two new partially observable driving case studies (Contribution 1).

*Tier 1: Fully observable benchmarks.* **CartPole** and **Lunar Lander** [81] are retained from the conference paper as controlled settings where the system state is a complete Markov description. These results establish continuity with the conference version and a clean baseline for physically interpretable prediction under simple dynamics.

*Tier 2: Partially observable simulated driving (CarRacing).* **CarRacing** [81] is a top-down simulated racing environment in which the vehicle navigates a procedurally generated track. The observation is a bird’s-eye-view RGB image (native  $96 \times 96$ , resized to  $64 \times 64$  for the encoder). The vehicle’s kinematic state is available from the simulator, but the road geometry (the shape of the upcoming track and the vehicle’s relationship to the lane) is not part of the state and must be inferred from the image. Because the camera

is top-down, the road ahead is visible but the model must still *encode* it into the physical road context and *predict* its evolution during rollout. This is the controlled setting in which the factorized-state formulation and the split dynamics were developed; the quantitative evaluation reported in this article is on the physical platform of Tier 3, for the reason given in Section 7.2.

*Tier 3: Real-world DonkeyCar deployment.* The **DonkeyCar (real)** tier evaluates the factorized formulation on a physical RC-scale autonomous car driven on a laboratory track. The car observes its environment through a front-facing camera (the test-time observation,  $64 \times 64$ ), and logs wheel-encoder speed, steering, and pose. This is the most demanding tier: the camera is forward-facing, so the road ahead is only partially visible, and the road context cannot be measured by the deployed car. We collect driving trajectories on the physical platform and derive ground-truth road context from external track localization, used as privileged supervision at training time only (Section 5.2); at test time the model infers and rolls out road context from the onboard front-camera stream alone.

## 6.2. Experimental Setup

*Benchmarks (Tier 1).* The data-collection and weak-supervision protocol follows the conference paper. For each environment, we collect 60,000 trajectories of at least 50 steps, generated by a mix of random actions and a pre-trained neural controller. Weak-supervision labels are synthesized by adding biased uniform noise of relative width  $\delta \in \{0\%, 5\%, 10\%\}$  to the ground-truth state, as described in Appendix A.

*CarRacing (Tier 2).* Driving data are generated with a pretrained controller on procedurally generated tracks; each episode records the onboard image, action, and simulator state. Ground-truth labels for the vehicle-relative state  $(x_{\text{rel}}, y_{\text{rel}}, \psi_{\text{rel}})$  and the road-context state  $(e_{\text{CTE}}, e_{\psi}, \kappa)$  are available directly from the simulator and its track geometry. We use exact ground-truth labels for training (corresponding to  $\delta = 0$ ) and evaluate whether the factorized-state formulation improves long-horizon prediction relative to baselines that use only vehicle-state labels.

*DonkeyCar real (Tier 3).* We drive the physical DonkeyCar on a closed laboratory track and record synchronized front-camera frames ( $64 \times 64$ ), control actions (steering, throttle), and vehicle pose, at approximately 22 fps, so that  $\Delta t = 1/22$  s and the 100-step evaluation horizon corresponds to about 4.5 s of

driving. Trajectories are segmented into clean contiguous laps; brief sensing artifacts (dropped or interpolated frames, pose glitches) are filtered out before training. Ground-truth road context is computed from the known track centreline and the logged pose (privileged supervision), and is withheld at test time. Laps are split into disjoint training and validation sets; all numbers reported below are computed on the 201 held-out validation windows, in real metres.

*Architecture and training.* The driving experiments use the extrinsic PIWM variant (a vision encoder followed by a physical encoder producing the factorized state), which the conference paper showed to be the strongest configuration. The vision encoder maps each  $64 \times 64$  observation to a compact latent, and the physical encoder aggregates a context window of  $k = 15$  frames ( $\approx 0.7$ s) to infer the road context from image sequences (Section 5.2). Rollouts are trained on 16-step horizons and evaluated at up to 100 steps, so the reported horizon is more than six times the training horizon. Dynamics are trained with Adam, a cosine learning-rate schedule and early stopping on validation loss. All baselines are trained under identical conditions with the same data, the same optimizer and the same evaluation protocol, and with the batch sizes at which each baseline was tuned; we verified that increasing the batch size degrades these small, latency-bound baselines and would therefore have flattered our model.

### 6.3. Baselines

We compare against the same families used in the conference paper. **DVBF** [45], **GokuNet** [43] and **Vid2Param** [59] are physics-aware latent sequence models, and **SindyC** [60] is a classical dynamics-discovery baseline operating on the interpretable latent. All of them receive the same images and actions as our model; in addition, each baseline is given the ground-truth lane waypoints at the first timestep of the window, so the comparison is, if anything, generous to them: they start from a description of the road that our model must recover from pixels. To separate the contribution of *perceiving* the road from that of *representing* it, we also evaluate a privileged **oracle** variant of our own model in which  $\kappa$  is read from the known track map instead of the camera; the gap between the two is the cost of perception.

### 6.4. Metrics

The primary driving metric is the *position error at rollout step  $k$* : the Euclidean distance, in metres, between the predicted and the true vehicle



position after  $k$  autoregressive steps, averaged over the  $N = 201$  held-out validation windows,

$$E_{xy}(k) = \frac{1}{N} \sum_{i=1}^N \|\hat{p}_{i,k} - p_{i,k}\|_2, \quad p_{i,k} = (x_{\text{rel}}, y_{\text{rel}})_{i,k}, \quad (21)$$

where positions are expressed in the vehicle-relative frame of (3) anchored at the start of the window. We report  $E_{xy}$  at  $k \in \{25, 50, 100\}$  and plot the full curve  $k \mapsto E_{xy}(k)$ ; all rollouts are initialized from the ground-truth state at  $k = 0$  so that the comparison isolates the dynamics rather than the encoder. Because  $E_{xy}$  is a distance and not a squared error, its values are directly readable as centimetres of drift. We additionally report the curvature error of the road-context encoder,  $\text{RMSE}_\kappa$  in  $\text{m}^{-1}$ , to evaluate the encoded road directly. For benchmark tasks (Tier 1) we follow the conference protocol and report state RMSE over all state dimensions at a 30-step horizon, together with the relative parameter-recovery error for the environments whose ground-truth physical parameters are known (CartPole, Lunar Lander).

## 7. Results

### 7.1. Benchmark Results (Tier 1)

The fully observable benchmark results are carried over from the conference paper [8] and summarized here for completeness. Across CartPole, Lunar Lander and the *simulated* DonkeyCar of the conference paper—which is a different platform from the physical car of Section 7.3—the extrinsic-discrete PIWM variant consistently achieves the lowest and most stable 30-step prediction error, substantially outperforming data-driven and physics-aware baselines; the quantized latent provides strong regularization that improves long-horizon stability. PIWM also recovers the ground-truth physical parameters of CartPole and Lunar Lander with low relative error across all noise levels  $\delta$ , confirming that the learned representations are genuinely physically grounded rather than merely correlated with the physics. These benchmark results establish that the driving extension is a proper superset of the original framework: on fully observable tasks, where the vehicle state is already Markov, PIWM behaves exactly as before.

### 7.2. CarRacing (Tier 2)

CarRacing serves in this article as the controlled simulated setting in which the factorized formulation was developed: the road geometry is present

in the image but absent from the vehicle state, so the encoder must recover it from pixels even though the top-down view makes the road ahead fully visible. We do not report a quantitative baseline comparison for this tier here. The comparison in an earlier version of this work was run with a vehicle-only dynamics variant rather than the road-context model described in Section 5.3, and re-running it with the present model is left to future work; Section 8 returns to this point. All quantitative claims in this article therefore rest on the physical platform of Section 7.3, where the forward-facing camera makes partial observability genuine rather than nominal.

### 7.3. Real DonkeyCar Results (Tier 3)

We deploy the learned model on the physical DonkeyCar, where the road context is supervised only during training and must be inferred from the front camera at test time. This is the setting the article is about: the camera sees a short stretch of road, the vehicle state alone is non-Markov, and nothing about the track is available to the deployed model beyond what it can read from its own images.

*Long-horizon prediction against baselines.* Table 1 and Figure 5 report position error over a 100-step ( $\approx 4.5$ s) autoregressive rollout on the 201 held-out validation windows. Two regimes are visible, and the crossover between them is the central result. Up to roughly 65 steps the physics-aware baselines are *ahead* of our model: Vid2Param in particular is more than twice as accurate at step 25 (0.036m against 0.090m). This is expected, and it is a consequence of the comparison being generous to them: each baseline is handed the ground-truth lane waypoints at  $t_0$ , so over short horizons it is interpolating from a description of the road that our model had to recover from pixels. Beyond the crossover the ordering inverts and does not invert back. By step 100 every baseline has entered superlinear error growth, while our model has not: 0.267m against 0.383m for the strongest baseline, a factor of 1.4, growing to  $1.8\times$  against GokuNet and  $2.3\times$  against DVBF. SindyC diverges outright, exceeding the plot range before step 25 and reaching  $\sim 10^{17}$  by the end of the rollout.

*What the crossover means.* The two regimes separate two different things a world model can be good at. Before the crossover the task is essentially smooth extrapolation of the recent motion, and a flexible latent sequence model does it well. After the crossover the rollout has left the stretch of road

Table 1: Position error  $E_{xy}$  in metres on the physical DonkeyCar, at three rollout horizons, averaged over the 201 held-out validation windows (lower is better). All models see the same images and actions; the baselines additionally receive the ground-truth lane waypoints at  $t_0$ . The oracle row is a privileged variant of our own model, not a competing method: it reads  $\kappa$  from the known track map instead of the camera and therefore upper-bounds what perfect road perception could buy.

| Model                                                       | $E_{xy}(25)$                           | $E_{xy}(50)$ | $E_{xy}(100)$ |
|-------------------------------------------------------------|----------------------------------------|--------------|---------------|
| Vid2Param [59]                                              | <b>0.036</b>                           | <b>0.076</b> | 0.383         |
| GokuNet [43]                                                | 0.061                                  | 0.130        | 0.478         |
| DVBF [45]                                                   | 0.071                                  | 0.167        | 0.610         |
| SindyC [60]                                                 | diverges ( $\sim 10^{17}$ at step 100) |              |               |
| <b>PIWM-Frenet (ours, perceived <math>\kappa</math>)</b>    | 0.090                                  | 0.158        | <b>0.267</b>  |
| <i>PIWM-Frenet (oracle <math>\kappa</math>, privileged)</i> | <i>0.085</i>                           | <i>0.148</i> | <i>0.246</i>  |

that the initial observation described, and the question becomes whether the model knows what road it is now on. A model that carries the road as a free latent must propagate it, and any error in that propagation feeds back into the vehicle branch that consumes it; the result is the compounding growth visible in Figure 5. Our model does not propagate the road at all: by (20) it re-reads the curvature that was already perceived at  $t_0$ , indexed by the arc length covered so far (Figure 4). Since the vehicle travels on average 3.3m over the full rollout, well inside the 4.5m preview, the road is *observed* for the entire horizon and error in it cannot accumulate.

*The cost of perceiving the road.* Because the road-context encoder (Figure 3) is the only part of the model that has to look at pixels, we can price it directly by replacing its output with progressively better sources of  $\kappa$  (Table 2). Reading  $\kappa$  from the known track map—privileged information no image-and-action model could have—yields 0.246 m; feeding the ground-truth curvature profile, i.e. perfect perception of exactly the quantity the encoder predicts, yields 0.263 m; the encoder actually used yields 0.267 m at a curvature error of  $\text{RMSE}_\kappa = 0.1193 \text{ m}^{-1}$ . The entire cost of replacing a map lookup by a camera is therefore about 2 cm at 100 steps, roughly 8% of the total error, and the model still beats the strongest baseline by  $1.4\times$ . The advantage is thus attributable to the *structure* of the representation, not to privileged information.

The same table settles two architecture questions. First, the encoder

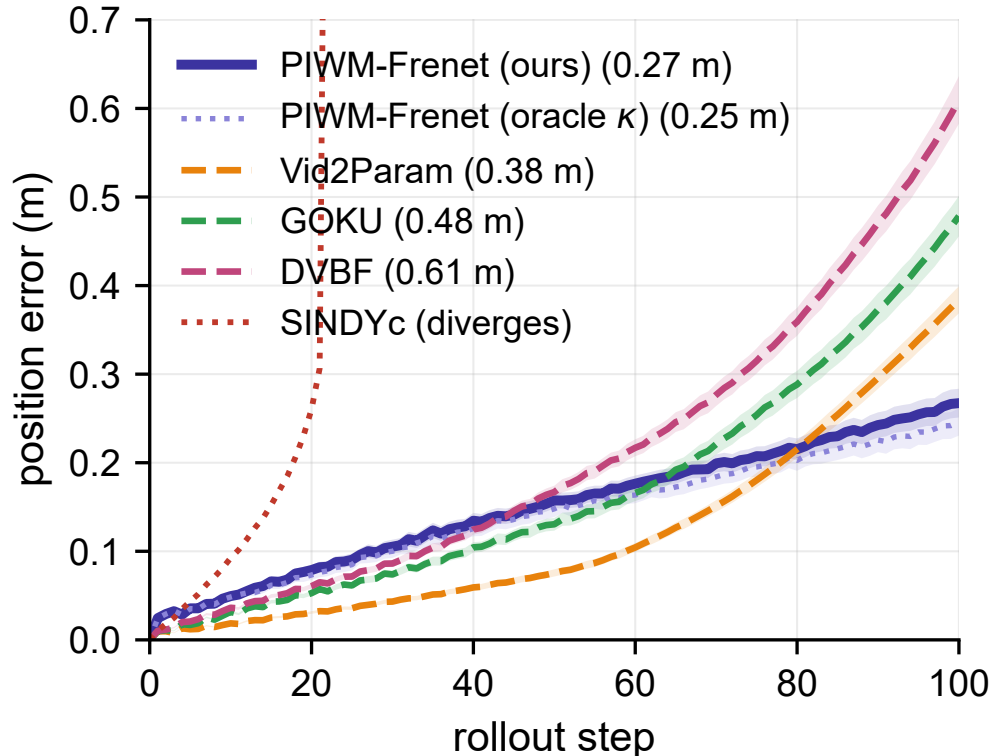


Figure 5: Position error against rollout step on the physical DonkeyCar (mean  $\pm$  standard error over the 201 held-out validation windows, all rollouts initialized from the ground-truth state). The baselines lead over short horizons and then enter superlinear growth; the proposed model stays close to linear because the road it rolls out over was observed rather than extrapolated. SindyC leaves the plot range before step 25. The privileged oracle curve (dotted) is our own model with  $\kappa$  read from the track map and sits only  $\sim 2$  cm below the perceived model at step 100.

is best trained from scratch on the road-context objective: warm-starting its backbone from the pretrained visual encoder of the conference model is slightly worse (0.274 m) and freezing that backbone is clearly worse (0.290 m), so features tuned for image reconstruction are not the features needed to read road curvature. Second, the discrete-latent, self-attention configuration that the conference paper found strongest on fully observable benchmarks does *not* transfer to this task: at matched capacity and four times the training budget, and with a healthy codebook (roughly 270 of 512 entries in active use), the VQ-Transformer encoder reaches only  $\text{RMSE}_\kappa = 0.190 \text{ m}^{-1}$  against

Table 2: Where the curvature comes from. All rows use the identical dynamics and differ only in how  $\kappa$  is obtained.  $\text{RMSE}_\kappa$  is the encoder’s own curvature error in  $\text{m}^{-1}$  and  $E_{xy}(100)$  the resulting 100-step position error in metres, both on the physical DonkeyCar. The first two rows are privileged upper bounds, not deployable models; the remaining four read the front camera alone and differ only in encoder architecture or initialization. Note how little of the wide spread in perception quality survives into the rollout: a factor of two in  $\text{RMSE}_\kappa$  becomes 2.3 cm in  $E_{xy}(100)$ .

| Source of $\kappa$         | Input         | $\text{RMSE}_\kappa$ | $E_{xy}(100)$ |
|----------------------------|---------------|----------------------|---------------|
| Known track map            | map + pose    | —                    | 0.246         |
| Ground-truth profile       | true $\kappa$ | —                    | 0.263         |
| <b>CNN, from scratch</b>   | <b>camera</b> | <b>0.119</b>         | <b>0.267</b>  |
| CNN, warm-started backbone | camera        | 0.122                | 0.274         |
| VQ + Transformer           | camera        | 0.190                | 0.275         |
| CNN, frozen backbone       | camera        | 0.237                | 0.290         |

$0.119 \text{ m}^{-1}$  for the convolutional encoder.

The most informative thing about Table 2, however, is how weakly perception quality propagates. Curvature error varies by a factor of two across the four camera-only rows ( $0.119\text{--}0.237 \text{ m}^{-1}$ ) while the resulting 100-step position error varies by 2.3 cm ( $0.267\text{--}0.290 \text{ m}$ ); the VQ–Transformer encoder is 59% worse at reading curvature yet only 8 mm worse at predicting position. This is the clearest evidence we have for the article’s central claim. If the rollout depended on continuously estimating the road, a 59% worse estimate would compound over 100 steps. It does not, because the road enters the dynamics as a fixed preview that is re-indexed geometrically (20) rather than integrated: errors in  $\hat{\kappa}$  perturb the trajectory, but they do not accumulate in it. The corollary is practical—effort spent sharpening road perception has sharply diminishing returns here, and the remaining error is dominated by the vehicle branch, consistent with the sensitivity analysis below.

*Robustness to weak supervision.* All results above are trained with exact road-context labels. The conference formulation, however, supervises the interpretable state only through noisy distributions, and the physical platform is exactly where such labels are hardest to obtain: they come from an external localization system whose accuracy is finite. We therefore repeat the training under the conference noise model of Appendix A, injecting biased uniform label noise of relative width  $\delta \in \{0\%, 5\%, 10\%\}$  (Table 3, Figure 6). At  $\delta = 10\%$  the model still reaches 0.253 m, which remains better than the

Table 3: Weak-supervision noise on the physical DonkeyCar. Position error  $E_{xy}$  in metres when the road-context labels used for training are corrupted by biased uniform noise of relative width  $\delta$  (Appendix A). The last column is the strongest baseline from Table 1, trained on clean labels, for reference.

|                                                                           | $\delta = 0\%$ | $\delta = 5\%$ | $\delta = 10\%$ |
|---------------------------------------------------------------------------|----------------|----------------|-----------------|
| $E_{xy}(50)$                                                              | 0.158          | 0.197          | 0.162           |
| $E_{xy}(100)$                                                             | 0.267          | 0.334          | 0.253           |
| <i>strongest baseline, clean labels: <math>E_{xy}(100) = 0.383</math></i> |                |                |                 |

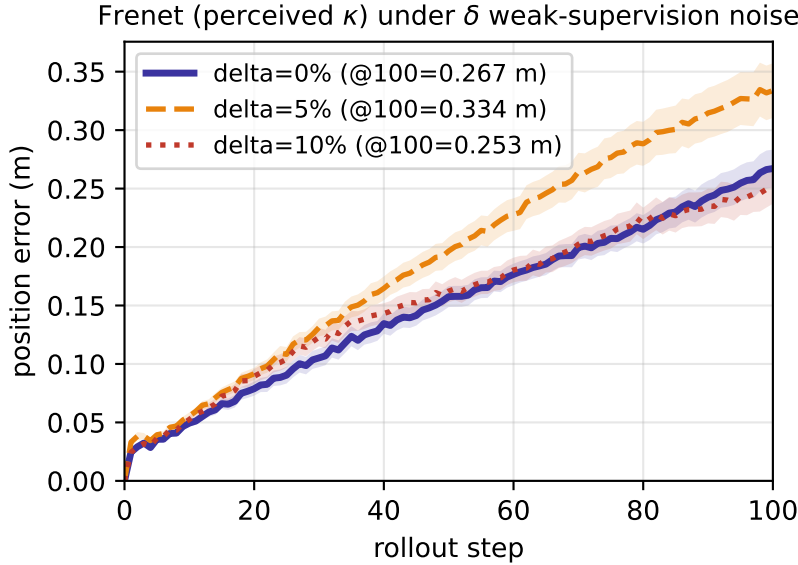


Figure 6: Robustness to corrupted road-context supervision. Position error against rollout step on the physical DonkeyCar when the labels used to train the road-context encoder carry biased uniform noise of relative width  $\delta$ . All three curves stay below the 0.383 m reached at step 100 by the strongest baseline trained on clean labels.

strongest baseline trained on *clean* labels (0.383 m). Degradation is therefore not the binding constraint: the geometric structure of the rollout carries the model even when the supervision that shaped its encoder is substantially corrupted. We note that the ordering across  $\delta$  is not monotone— $\delta = 5\%$  is worse than  $\delta = 10\%$ —which is single-run training variance rather than a property of the noise model; separating the two would require repeating each condition over multiple folds, which we leave to future work.

*Robustness to a corrupted initial state.* The study above perturbs the *supervision*; a complementary question is what happens when the state the rollout starts from is itself wrong, as it would be under an imperfect state estimator at deployment. We therefore repeat the evaluation with Gaussian noise of standard deviation  $\sigma$  (in units of each state variable’s own standard deviation) added to the initial state, 10 draws per window (Figure 7 (a)). This is a *test-time* perturbation of the state and should not be confused with the  $\delta$  *training-label* noise of Table 3; the two probe different failure modes. The ranking is unchanged at every level: at  $\sigma = 1.5$  our model is at 0.749 m against 0.889 m (Vid2Param), 1.186 m (GokuNet) and 1.393 m (DVBF). We note that our relative degradation over this range ( $2.8\times$ ) is in fact slightly larger than the baselines’ ( $2.3\text{--}2.5\times$ ), which is what one expects when a method starts from the smallest error: the absolute gap narrows with noise, but it does not close.

Because every state variable is a physical quantity, we can also ask *which* one the rollout is sensitive to, rather than only how sensitive it is overall (Figure 7 (b)). Perturbing the speed  $v$  is by far the most damaging—0.4 m/s of noise roughly doubles the 100-step error—while the yaw rate  $\omega$  is almost inconsequential over an order of magnitude larger range, and the road-context variables  $e_{\text{CTE}}$  and  $e_{\psi}$  sit in between. This is a diagnostic an opaque latent state cannot provide, and it is actionable: it says that longitudinal state estimation, not heading estimation, is where sensing effort should go on this platform.

## 8. Discussion

*Bounded rollout comes from not having to predict the road.* The horizon at which our model overtakes the baselines (Figure 5) is the horizon at which the initial observation stops describing the road the vehicle is on. Before it, the task is smooth extrapolation and a flexible latent model does it better than we do. After it, the question is whether the model knows the geometry it has entered, and this is where a free-latent road representation fails: it must be propagated, its propagation error compounds, and the vehicle branch that consumes it inherits that error. The structural answer this article proposes is to make the road not a predicted quantity at all but an *observed* one that is re-indexed by the vehicle’s own predicted motion (20). Vehicle state alone is non-Markov, so the road context must be *encoded*—but once encoded over

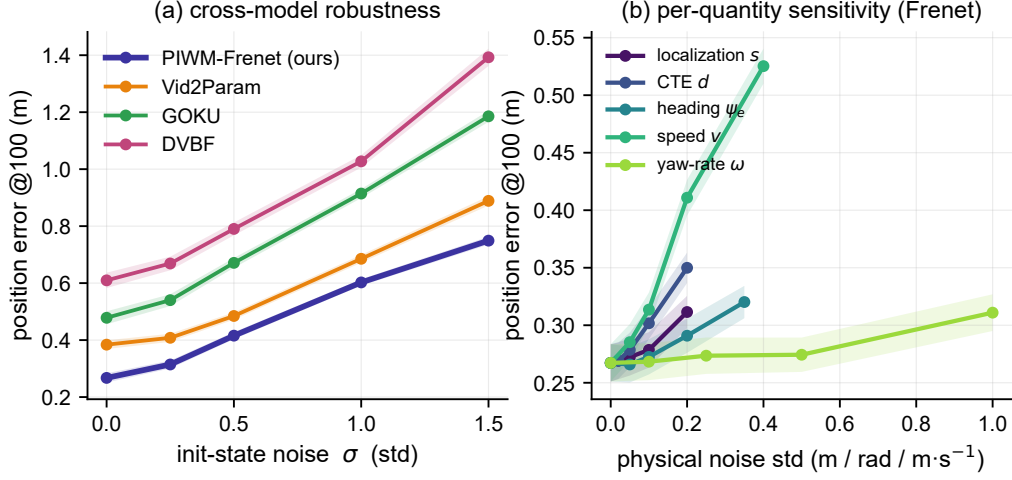


Figure 7: Robustness to a corrupted *initial state* (test-time perturbation; distinct from the training-label noise of Table 3). (a) 100-step position error against the noise scale  $\sigma$  applied to all state variables; the ranking is preserved throughout. (b) Sensitivity of our model to noise on each physical state variable separately. Speed dominates; yaw rate is nearly irrelevant. Shaded bands are standard errors over the 201 validation windows.

a preview that outlasts the horizon, it need not be extrapolated, and that is what keeps the error bounded.

*Structure, not information.* It would be easy to attribute our long-horizon advantage to the privileged supervision used at training time. Table 2 rules this out. Replacing the camera-derived curvature by a lookup into the true track map—the strongest form of privileged information available—improves the 100-step error only from 0.267 m to 0.246 m. The remaining 0.12 m separating our model from the strongest baseline is therefore not information the baseline lacked; the baselines were in fact handed ground-truth lane waypoints at  $t_0$ , which our model never sees. What separates them is that our state variables are road-aligned physical quantities propagated by analytic geometry, rather than latent coordinates propagated by a learned map.

*Interpretability of the forecasted environment.* Because the road context is physically interpretable, the forecasted road, not just the forecasted vehicle, can be inspected and monitored. The predicted curvature profile can be compared against the true track geometry at every step—the encoder’s own error,  $\text{RMSE}_\kappa = 0.1193 \text{ m}^{-1}$ , is measured in the physical unit of curvature—



providing a diagnostic that opaque world models do not offer. This is directly useful for safety monitoring: a forecasted road that departs from plausible geometry is a detectable failure signal, available before the predicted trajectory itself looks wrong. The same property makes the model’s failure modes addressable rather than merely observable: because the state is physical, the sensitivity study of Figure 7(b) attributes the rollout’s fragility to a specific quantity—longitudinal speed—and is silent about another—yaw rate—which turns a robustness result into a concrete instruction about where sensing effort belongs. A latent-state model can report that it is sensitive to initialization; it cannot say to *what*.

*Privileged training for real deployment.* The real DonkeyCar uses privileged road-context supervision at training and withholds it at test. This reflects practical deployability: external localization (a mapped track, or an overhead view) is available in instrumented training environments but not on a freely deployed car. The model must therefore learn to read road context from onboard images, guided during training by the privileged signal. The fact that the learned encoding transfers to the unaided setting is what makes the approach viable on real hardware.

*Limitations.* First, the road-context variables are specified manually for each environment; a more general approach might discover the decomposition automatically. Second, the vehicle kinematics are a slip-free approximation that ignores tire dynamics, which may limit accuracy at high speeds or on low-friction surfaces; the physical platform used here operates well inside the linear regime, so this assumption is untested at the limit. Third, the argument that the road need not be extrapolated holds only while the horizon stays inside the perceived preview. On our platform the 4.5 m preview covers the full 100-step rollout with margin, but a faster vehicle or a longer horizon would leave it, and the model would then have to either re-perceive or genuinely extrapolate the road; we have not characterized that regime. Fourth, privileged supervision requires an instrumented training environment to obtain ground-truth road context; reducing this requirement (e.g., via self-supervised road estimation) is open. Fifth, each configuration is trained once on a single train/validation split, so differences of a few centimetres—including the non-monotone ordering across  $\delta$  in Table 3—are within run-to-run variance; a cross-validated repetition is needed to resolve them. Sixth, the quantitative evaluation reported here is confined to the physical platform: the CarRacing

comparison referred to in Section 7.2 was run with a vehicle-only dynamics variant and has not been repeated with the road-context model, so this article does not claim a simulated-domain result. Finally, the method currently assumes a single vehicle and a single lane; multi-agent and multi-lane settings are future work.

*Future directions.* Natural next steps include scaling PIWM to open-world driving with richer road topology, multiple agents, and additional sensor modalities (LiDAR, radar); treating other vehicles as additional interpretable road-context variables to handle interactions and occlusions; and discovering the road-context structure from data via symbolic regression or causal structure learning, which would reduce the need for environment-specific design.

## 9. Conclusion

This article extended the Physically Interpretable World Model (PIWM) from fully observable benchmarks to partially observable driving. The central observation is that driving is partially observable: the vehicle’s physical state alone is non-Markov with respect to future trajectory, because the road context (lane geometry and the vehicle’s relationship to it) is absent from any standard state representation and only partially visible to an onboard camera. We addressed this along three axes. We introduced two partially observable driving case studies, a simulated CarRacing track and a real physical DonkeyCar. We introduced a physically interpretable *encoding* of the road environment, factorizing the interpretable state into a vehicle-relative component and a road-context component inferred from images, including under privileged supervision for real-world deployment. And we introduced a physically interpretable *prediction* of the road environment: a split-dynamics model in which the vehicle advances under structured kinematics while the road is advected past it, re-indexed by the distance the vehicle has covered rather than propagated as a free latent. Experiments on the real DonkeyCar confirm that this treatment of the external environment, not merely of the vehicle, is what keeps long-horizon prediction bounded under partial observability: at 100 steps the model reaches 0.267m against 0.383m for the strongest baseline, and it stays ahead under road-context supervision corrupted by up to 10% label noise, while the original benchmark results are retained unchanged. Replacing perceived curvature by a privileged map lookup improves the result by only about 2cm, so the advantage is attributable to the structure

of the representation rather than to the information available to it. Physically interpretable world modeling for driving thus requires aligning latent representations with physical variables *and* decomposing those representations according to the semantic structure of the task, so that the external environment is both encoded and predicted in physically meaningful terms.

### **Declaration of Competing Interest**

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this article.

### **CRedit Authorship Contribution Statement**

[CRedit ROLES — TO BE COMPLETED BEFORE SUBMISSION.]

### **Data Availability**

The DonkeyCar trajectories, the derived road-context labels and the code used to train and evaluate the models will be made available in a public repository upon publication.

### **Acknowledgements**

The authors thank Liam (Cade) McGlothlin and Vedansh Maheshwari for their help in exploring interpretable world models. This material is based upon work supported by the U.S. National Science Foundation under Grant Numbers CNS 2513076 and CCF 2403616. Any opinions, findings, and conclusions expressed in this material are those of the authors and do not necessarily reflect the views of the NSF.

### **Appendix A. Weak Supervision Noise Model**

The weak supervision in Tier 1 benchmark experiments follows the noise model from the conference paper. For the  $i$ -th state component with valid range size  $\mathcal{X}_i$ , we generate a randomly shifted center  $\tilde{\mu}_i = x_i + \Delta_i$ ,  $\Delta_i \sim \text{Unif}[-\frac{1}{2}\delta|\mathcal{X}_i|, \frac{1}{2}\delta|\mathcal{X}_i|]$ , and draw the supervisory distribution as  $p_i(x) = \text{Unif}[\tilde{\mu}_i - \frac{1}{2}\delta|\mathcal{X}_i|, \tilde{\mu}_i + \frac{1}{2}\delta|\mathcal{X}_i|]$ . At each timestep,  $L = 50$  samples are drawn to form the proxy supervision set  $\Xi_t$ . The same noise model

is applied to the road-context supervision  $\Xi^r$  on the physical DonkeyCar in the robustness study of Table 3, where  $\delta$  scales the valid range of each road-context component. Unless stated otherwise, the Tier 3 results reported in Section 7.3 use exact ground-truth labels at training time ( $\delta = 0$ ), reflecting the availability of training-time track localization; at test time the road context is withheld in every case and inferred from images.

## References

- [1] D. Ha, J. Schmidhuber, World models, arXiv preprint arXiv:1803.10122 (2018).
- [2] V. Micheli, E. Alonso, F. Fleuret, Transformers are sample-efficient world models, arXiv preprint arXiv:2209.00588 (2022).
- [3] D. Hafner, J. Pasukonis, J. Ba, T. Lillicrap, Mastering diverse domains through world models, arXiv preprint arXiv:2301.04104 (2023).
- [4] Y. Seo, D. Hafner, H. Liu, F. Liu, S. James, K. Lee, P. Abbeel, Masked world models for visual control, in: Conference on Robot Learning, PMLR, 2023, pp. 1332–1344.
- [5] O. Hasan, S. Tahar, Formal verification methods, in: Encyclopedia of Information Science and Technology, Third Edition, IGI global, 2015, pp. 7162–7170.
- [6] S. M. Katz, A. L. Corso, C. A. Strong, M. J. Kochenderfer, Verification of image-based neural network controllers using generative models, Journal of Aerospace Information Systems 19 (9) (2022) 574–584.
- [7] M. Alshiekh, R. Bloem, R. Ehlers, B. Könighofer, S. Niekum, U. Topcu, Safe reinforcement learning via shielding, in: Proceedings of the AAAI conference on artificial intelligence, Vol. 32, 2018.
- [8] Z. Mao, M. E. Umasudhan, I. Ruchkin, Physically interpretable world models via weakly supervised representation learning, arXiv preprint arXiv:2412.12870 (2026).
- [9] D. Fridovich-Keil, A. Bajcsy, J. F. Fisac, S. L. Herbert, S. Wang, A. D. Dragan, C. J. Tomlin, Confidence-aware motion prediction for real-time

collision avoidance<sup>1</sup>, The International Journal of Robotics Research 39 (2-3) (2020) 250–265.

- [10] S. Ammoun, F. Nashashibi, Real time trajectory prediction for collision risk estimation between vehicles, in: 2009 IEEE 5Th international conference on intelligent computer communication and processing, IEEE, 2009, pp. 417–422.
- [11] A. Li, L. Sun, W. Zhan, M. Tomizuka, M. Chen, Prediction-based reachability for collision avoidance in autonomous driving, in: 2021 Intl. Conf. on Robotics and Automation (ICRA), 2021.
- [12] K. Nakamura, S. Bansal, Online update of safety assurances using confidence-based predictions, in: 2023 IEEE International Conference on Robotics and Automation (ICRA), IEEE, 2023, pp. 12765–12771.
- [13] A. Muthali, H. Shen, S. Deglurkar, M. H. Lim, R. Roelofs, A. Faust, C. Tomlin, Multi-agent reachability calibration with conformal prediction, in: 2023 62nd IEEE Conference on Decision and Control (CDC), IEEE, 2023, pp. 6596–6603.
- [14] A. Alahi, K. Goel, V. Ramanathan, A. Robicquet, L. Fei-Fei, S. Savarese, Social lstm: Human trajectory prediction in crowded spaces, in: Proc. of the IEEE conference on computer vision and pattern recognition, 2016.
- [15] A. Gupta, J. Johnson, L. Fei-Fei, S. Savarese, A. Alahi, Social gan: Socially acceptable trajectories with generative adversarial networks, in: Proc. of the IEEE conference on computer vision and pattern recognition, 2018.
- [16] S. Wen, H. Wang, D. Metaxas, Social ode: Multi-agent trajectory forecasting with neural ordinary differential equations, in: European Conference on Computer Vision, Springer, 2022, pp. 217–233.
- [17] T. Salzmann, B. Ivanovic, P. Chakravarty, M. Pavone, Trajectron++: Dynamically-feasible trajectory forecasting with heterogeneous data, in: Computer Vision–ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part XVIII 16, Springer, 2020, pp. 683–700.

- [18] G. Revach, N. Shlezinger, X. Ni, A. L. Escoriza, R. J. Van Sloun, Y. C. Eldar, Kalmannet: Neural network aided kalman filtering for partially known dynamics, *IEEE Transactions on Signal Processing* 70 (2022) 1532–1547.
- [19] M. Itkina, M. Kochenderfer, Interpretable self-aware neural networks for robust trajectory prediction, in: *Conference on Robot Learning*, PMLR, 2023, pp. 606–617.
- [20] K.-C. Hsu, K. Leung, Y. Chen, J. F. Fisac, M. Pavone, Interpretable trajectory prediction for autonomous vehicles via counterfactual responsibility, in: *2023 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, IEEE, 2023, pp. 5918–5925.
- [21] L. Lindemann, X. Qin, J. V. Deshmukh, G. J. Pappas, Conformal prediction for stl runtime verification, in: *Proceedings of the ACM/IEEE 14th International Conference on Cyber-Physical Systems (with CPS-IoT Week 2023)*, 2023, pp. 142–153.
- [22] J. Lu, W. Zhan, M. Tomizuka, Y. Hu, Towards generalizable and interpretable motion prediction: A deep variational bayes approach, in: *International Conference on Artificial Intelligence and Statistics*, PMLR, 2024, pp. 4717–4725.
- [23] I. Ruchkin, M. Cleaveland, R. Ivanov, P. Lu, T. Carpenter, O. Sokolsky, I. Lee, Confidence composition for monitors of verification assumptions, in: *2022 ACM/IEEE 13th International Conference on Cyber-Physical Systems (ICCPS)*, IEEE, 2022, pp. 1–12.
- [24] M. Cleaveland, L. Lindemann, R. Ivanov, G. J. Pappas, Risk verification of stochastic systems with neural network controllers, *Artificial Intelligence* 313 (2022) 103782.
- [25] X. Qin, Y. Xia, A. Zutshi, C. Fan, J. V. Deshmukh, Statistical verification of cyber-physical systems using surrogate models and conformal inference, in: *2022 ACM/IEEE 13th International Conference on Cyber-Physical Systems (ICCPS)*, IEEE, 2022, pp. 116–126.
- [26] M. Zarei, Y. Wang, M. Pajic, Statistical verification of learning-based cyber-physical systems, in: *Proceedings of the 23rd International Conference on Hybrid Systems: Computation and Control*, 2020, pp. 1–7.

- [27] F. Cairolì, L. Bortolussi, N. Paoletti, Neural predictive monitoring under partial observability, in: Runtime Verification: 21st International Conference, RV 2021, Virtual Event, October 11–14, 2021, Proceedings 21, Springer, 2021, pp. 121–141.
- [28] M. Waga, E. Castellano, S. Pruekprasert, S. Klikovits, T. Takisaka, I. Hasuo, Dynamic shielding for reinforcement learning in black-box environments, in: International Symposium on Automated Technology for Verification and Analysis, Springer, 2022, pp. 25–41.
- [29] A. Stocco, M. Weiss, M. Calzana, P. Tonella, Misbehaviour prediction for autonomous driving systems, in: Proceedings of the ACM/IEEE 42nd international conference on software engineering, 2020, pp. 359–371.
- [30] M. Ma, J. Gao, L. Feng, J. Stankovic, Stlnet: Signal temporal logic enforced multivariate recurrent neural networks, *Advances in Neural Information Processing Systems* 33 (2020) 14604–14614.
- [31] Z. Mao, C. Sobolewski, I. Ruchkin, How safe am i given what i see? calibrated prediction of safety chances for image-controlled autonomy, in: 6th Annual Learning for Dynamics & Control Conference, PMLR, 2024, pp. 1370–1387.
- [32] Z. Mao, M. E. Umasudhan, I. Ruchkin, How safe will i be given what i saw? calibrated prediction of safety chances for image-controlled autonomy, *arXiv preprint arXiv:2508.09346* (2025).
- [33] G. E. Hinton, S. Osindero, Y. W. Teh, A fast learning algorithm for deep belief nets, *Neural Computation* 18 (2006) 1527–1554.
- [34] D. P. Kingma, Auto-encoding variational bayes, *arXiv preprint arXiv:1312.6114* (2013).
- [35] I. Higgins, L. Matthey, A. Pal, C. P. Burgess, X. Glorot, M. M. Botvinick, S. Mohamed, A. Lerchner, beta-vae: Learning basic visual concepts with a constrained variational framework., *ICLR (Poster)* 3 (2017).
- [36] H. Kim, A. Mnih, Disentangling by factorising, in: International conference on machine learning, PMLR, 2018, pp. 2649–2658.

- [37] R. T. Chen, X. Li, R. B. Grosse, D. K. Duvenaud, Isolating sources of disentanglement in variational autoencoders, *Advances in neural information processing systems* 31 (2018).
- [38] M. Yang, F. Liu, Z. Chen, X. Shen, J. Hao, J. Wang, Causalvae: Disentangled representation learning via neural structural causal models, in: *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2021, pp. 9593–9602.
- [39] B. Schölkopf, F. Locatello, S. Bauer, N. R. Ke, N. Kalchbrenner, A. Goyal, Y. Bengio, Toward causal representation learning, *Proceedings of the IEEE* 109 (5) (2021) 612–634.
- [40] M. Mosbach, J. N. Ewertz, A. Villar-Corrales, S. Behnke, Sold: Slot object-centric latent dynamics models for relational manipulation learning from pixels (2025). arXiv:2410.08822.  
URL <https://arxiv.org/abs/2410.08822>
- [41] A. Van Den Oord, O. Vinyals, et al., Neural discrete representation learning, *Advances in neural information processing systems* 30 (2017).
- [42] A. Razavi, A. Van den Oord, O. Vinyals, Generating diverse high-fidelity images with vq-vae-2, *Advances in neural information processing systems* 32 (2019).
- [43] O. Linial, N. Ravid, D. Eytan, U. Shalit, Generative ODE modeling with known unknowns, in: *Proceedings of the Conference on Health, Inference, and Learning, CHIL '21*, Association for Computing Machinery, New York, NY, USA, 2021, pp. 79–94. doi:10.1145/3450439.3451866.  
URL <https://dl.acm.org/doi/10.1145/3450439.3451866>
- [44] A. Lei, B. Schölkopf, I. Posner, Spartan: A sparse transformer learning local causation, *arXiv preprint arXiv:2411.06890* (2024).
- [45] M. Karl, M. Soelch, J. Bayer, P. Van der Smagt, Deep variational bayes filters: Unsupervised learning of state space models from raw data, *arXiv preprint arXiv:1605.06432* (2016).
- [46] R. T. Chen, Y. Rubanova, J. Bettencourt, D. K. Duvenaud, Neural ordinary differential equations, *Advances in neural information processing systems* 31 (2018).



- [47] M. Tomar, U. A. Mishra, A. Zhang, M. E. Taylor, Learning representations for pixel-based control: What matters and why? (2021). arXiv:2111.07775.  
URL <https://arxiv.org/abs/2111.07775>
- [48] D. Hafner, T. Lillicrap, I. Fischer, R. Villegas, D. Ha, H. Lee, J. Davidson, Learning latent dynamics for planning from pixels, in: International conference on machine learning, PMLR, 2019, pp. 2555–2565.
- [49] D. Hafner, T. Lillicrap, M. Norouzi, J. Ba, Mastering atari with discrete world models, arXiv preprint arXiv:2010.02193 (2020).
- [50] P. Wu, A. Escontrela, D. Hafner, P. Abbeel, K. Goldberg, Daydreamer: World models for physical robot learning, in: Conference on robot learning, PMLR, 2023, pp. 2226–2240.
- [51] L. Zhang, G. Yang, B. C. Stadie, World model as a graph: Learning latent landmarks for planning, in: International conference on machine learning, PMLR, 2021, pp. 12611–12620.
- [52] Z. Zhao, M. Qi, H. Ma, Decomposed vector-quantized variational autoencoder for human grasp generation, in: European Conference on Computer Vision, Springer, 2024, pp. 447–463.
- [53] W. Zheng, W. Chen, Y. Huang, B. Zhang, Y. Duan, J. Lu, Occworld: Learning a 3d occupancy world model for autonomous driving, in: European conference on computer vision, Springer, 2024, pp. 55–72.
- [54] C. Min, D. Zhao, L. Xiao, Y. Nie, B. Dai, Uniworld: Autonomous driving pre-training via world models, arXiv preprint arXiv:2308.07234 (2023).
- [55] Z. Yan, W. Dong, Y. Shao, Y. Lu, L. Haiyang, J. Liu, H. Wang, Z. Wang, Y. Wang, F. Remondino, et al., Renderworld: World model with self-supervised 3d label, arXiv preprint arXiv:2409.11356 (2024).
- [56] S. Zuo, W. Zheng, Y. Huang, J. Zhou, J. Lu, Gaussianworld: Gaussian world model for streaming 3d occupancy prediction, arXiv preprint arXiv:2412.10373 (2024).
- [57] J. Balloch, Z. Lin, R. Wright, X. Peng, M. Hussain, A. Srinivas, J. Kim, M. O. Riedl, Neuro-symbolic world models for adapting to open world novelty, arXiv preprint arXiv:2301.06294 (2023).

- [58] Y. Liang, N. Kumar, H. Tang, A. Weller, J. B. Tenenbaum, T. Silver, J. F. Henriques, K. Ellis, Visualpredicator: Learning abstract world models with neuro-symbolic predicates for robot planning, arXiv preprint arXiv:2410.23156 (2024).
- [59] M. Asenov, M. Burke, D. Angelov, T. Davchev, K. Subr, S. Ramamoorthy, Vid2param: Modeling of dynamics parameters from video, IEEE Robotics and Automation Letters 5 (2) (2019) 414–421.
- [60] S. L. Brunton, J. L. Proctor, J. N. Kutz, Sparse identification of nonlinear dynamics with control (sindyc)., IFAC-PapersOnLine 49 (18) (2016) 710–715, 10th IFAC Symposium on Nonlinear Control Systems NOLCOS 2016. doi:<https://doi.org/10.1016/j.ifacol.2016.10.249>.  
URL <https://www.sciencedirect.com/science/article/pii/S2405896316318298>
- [61] F. de Avila Belbute-Peres, K. Smith, K. Allen, J. Tenenbaum, J. Z. Kolter, End-to-end differentiable physics for learning and control, Advances in neural information processing systems 31 (2018).
- [62] D. Yao, C. Muller, F. Locatello, Marrying causal representation learning with dynamical systems for science, Advances in Neural Information Processing Systems 37 (2024) 71705–71736.
- [63] S. Cai, Z. Mao, Z. Wang, M. Yin, G. E. Karniadakis, Physics-informed neural networks (pinns) for fluid mechanics: A review, Acta Mechanica Sinica 37 (12) (2021) 1727–1738.
- [64] W. Zhong, H. Meidani, Pi-vae: Physics-informed variational auto-encoder for stochastic differential equations, Computer Methods in Applied Mechanics and Engineering 403 (2023) 115664. doi:<https://doi.org/10.1016/j.cma.2022.115664>.  
URL <https://www.sciencedirect.com/science/article/pii/S0045782522006193>
- [65] R. Tumu, L. Lindemann, T. Nghiem, R. Mangharam, Physics constrained motion prediction with uncertainty quantification, in: 2023 IEEE Intelligent Vehicles Symposium (IV), IEEE, 2023, pp. 1–8.

- [66] K. Sridhar, S. Dutta, J. Weimer, I. Lee, Guaranteed conformance of neurosymbolic models to natural constraints, in: Learning for Dynamics and Control Conference, PMLR, 2023, pp. 76–89.
- [67] F. Djeumou, C. Neary, U. Topcu, How to learn and generalize from three minutes of data: Physics-constrained and uncertainty-aware neural stochastic differential equations, arXiv preprint arXiv:2306.06335 (2023).
- [68] H. Cui, T. Nguyen, F.-C. Chou, T.-H. Lin, J. Schneider, D. Bradley, N. Djuric, Deep kinematic models for kinematically feasible vehicle trajectory predictions, in: 2020 IEEE International Conference on Robotics and Automation (ICRA), IEEE, 2020, pp. 10563–10569.
- [69] Y. Mao, Y. Gu, L. Sha, H. Shao, Q. Wang, T. Abdelzaher, Phy-Taylor: Partially Physics-Knowledge-Enhanced Deep Neural Networks via NN Editing, IEEE Transactions on Neural Networks and Learning Systems 36 (1) (2025) 447–461. doi:10.1109/TNNLS.2023.3325432.  
URL <https://ieeexplore.ieee.org/document/10297119>
- [70] L. P. Kaelbling, M. L. Littman, A. R. Cassandra, Planning and acting in partially observable stochastic domains, Artificial Intelligence 101 (1–2) (1998) 99–134.
- [71] L. P. Kaelbling, M. L. Littman, A. W. Moore, Reinforcement learning: A survey, Journal of artificial intelligence research 4 (1996) 237–285.
- [72] D. Wierstra, A. Förster, J. Peters, J. Schmidhuber, Solving deep memory POMDPs with recurrent policy gradients, in: International Conference on Artificial Neural Networks (ICANN), Springer, 2007, pp. 697–706.
- [73] J. Chung, C. Gulcehre, K. Cho, Y. Bengio, Empirical evaluation of gated recurrent neural networks on sequence modeling, arXiv preprint arXiv:1412.3555 (2014).
- [74] X. Shi, Z. Chen, H. Wang, D.-Y. Yeung, W.-K. Wong, W.-c. Woo, Convolutional lstm network: A machine learning approach for precipitation nowcasting, Advances in neural information processing systems 28 (2015).

- [75] S. Bai, J. Z. Kolter, V. Koltun, An empirical evaluation of generic convolutional and recurrent networks for sequence modeling, arXiv preprint arXiv:1803.01271 (2018).
- [76] D. Chen, B. Zhou, V. Koltun, P. Krähenbühl, Learning by cheating, in: Conference on Robot Learning (CoRL), PMLR, 2020, pp. 66–75.
- [77] J. Gou, B. Yu, S. J. Maybank, D. Tao, Knowledge distillation: A survey, International Journal of Computer Vision 129 (6) (2021) 1789–1819.
- [78] J. Kong, M. Pfeiffer, G. Schildbach, F. Borrelli, Kinematic and dynamic vehicle models for autonomous driving control design, in: 2015 IEEE Intelligent Vehicles Symposium (IV), IEEE, 2015, pp. 1094–1099.
- [79] A. Viitala, R. Boney, Y. Zhao, A. Ilin, J. Kannala, Learning to drive (l2d) as a low-cost benchmark for real-world reinforcement learning, in: 2021 20th International Conference on Advanced Robotics (ICAR), IEEE, 2021, pp. 275–281.
- [80] A. Hussein, M. M. Gaber, E. Elyan, C. Jayne, Imitation learning: A survey of learning methods, ACM Computing Surveys (CSUR) 50 (2) (2017) 1–35.
- [81] G. Brockman, V. Cheung, L. Pettersson, J. Schneider, J. Schulman, J. Tang, W. Zaremba, Openai gym, arXiv preprint arXiv:1606.01540 (2016).