


DAC	Short range, fixed-length	Shielded Twisted Pair (STP) twinax
MMF	Multiple light sources, short distances	Core diameter = 50/62.5 microns
SMF	Single light source, long distances	Core diameter = 9 microns

SFP/SFP+	QSFP/QSFP+
100BASE-FX, 1000BASE-LX	40GBASE-LR4/40BASE-
10GBASE-SR/ZR	100GBASE-SR/100BASE-SR4

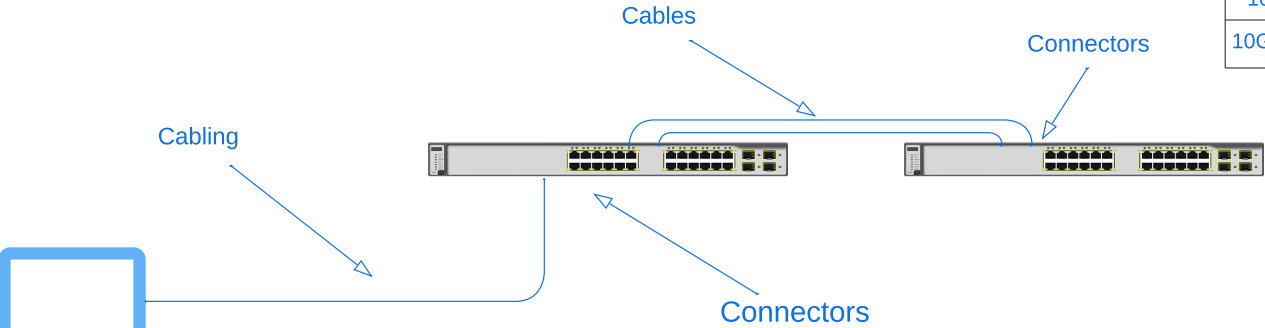

RJ-45	
TIA-568A	white-green/green;white-orange/orange
TIA-568B	white-orange/orange;white-green/green

CAT5	CAT5e	CAT6	CAT6a	CAT 7	CAT8
100 Mbps	up to 1 Gbps	1 Gbps	10 Gbps	10 Gbps	10/40 Gbps
Fast Ethernet	Gigabit Ethernet	Gigabit Ethernet	10 Gigabit Ethernet	Intended for 10G Ethernet	10G, 40G Ethernet
100BASE-T	1000BASE-T	1000BASE-T	10GBASE-T	IEC	40GBASE-T

