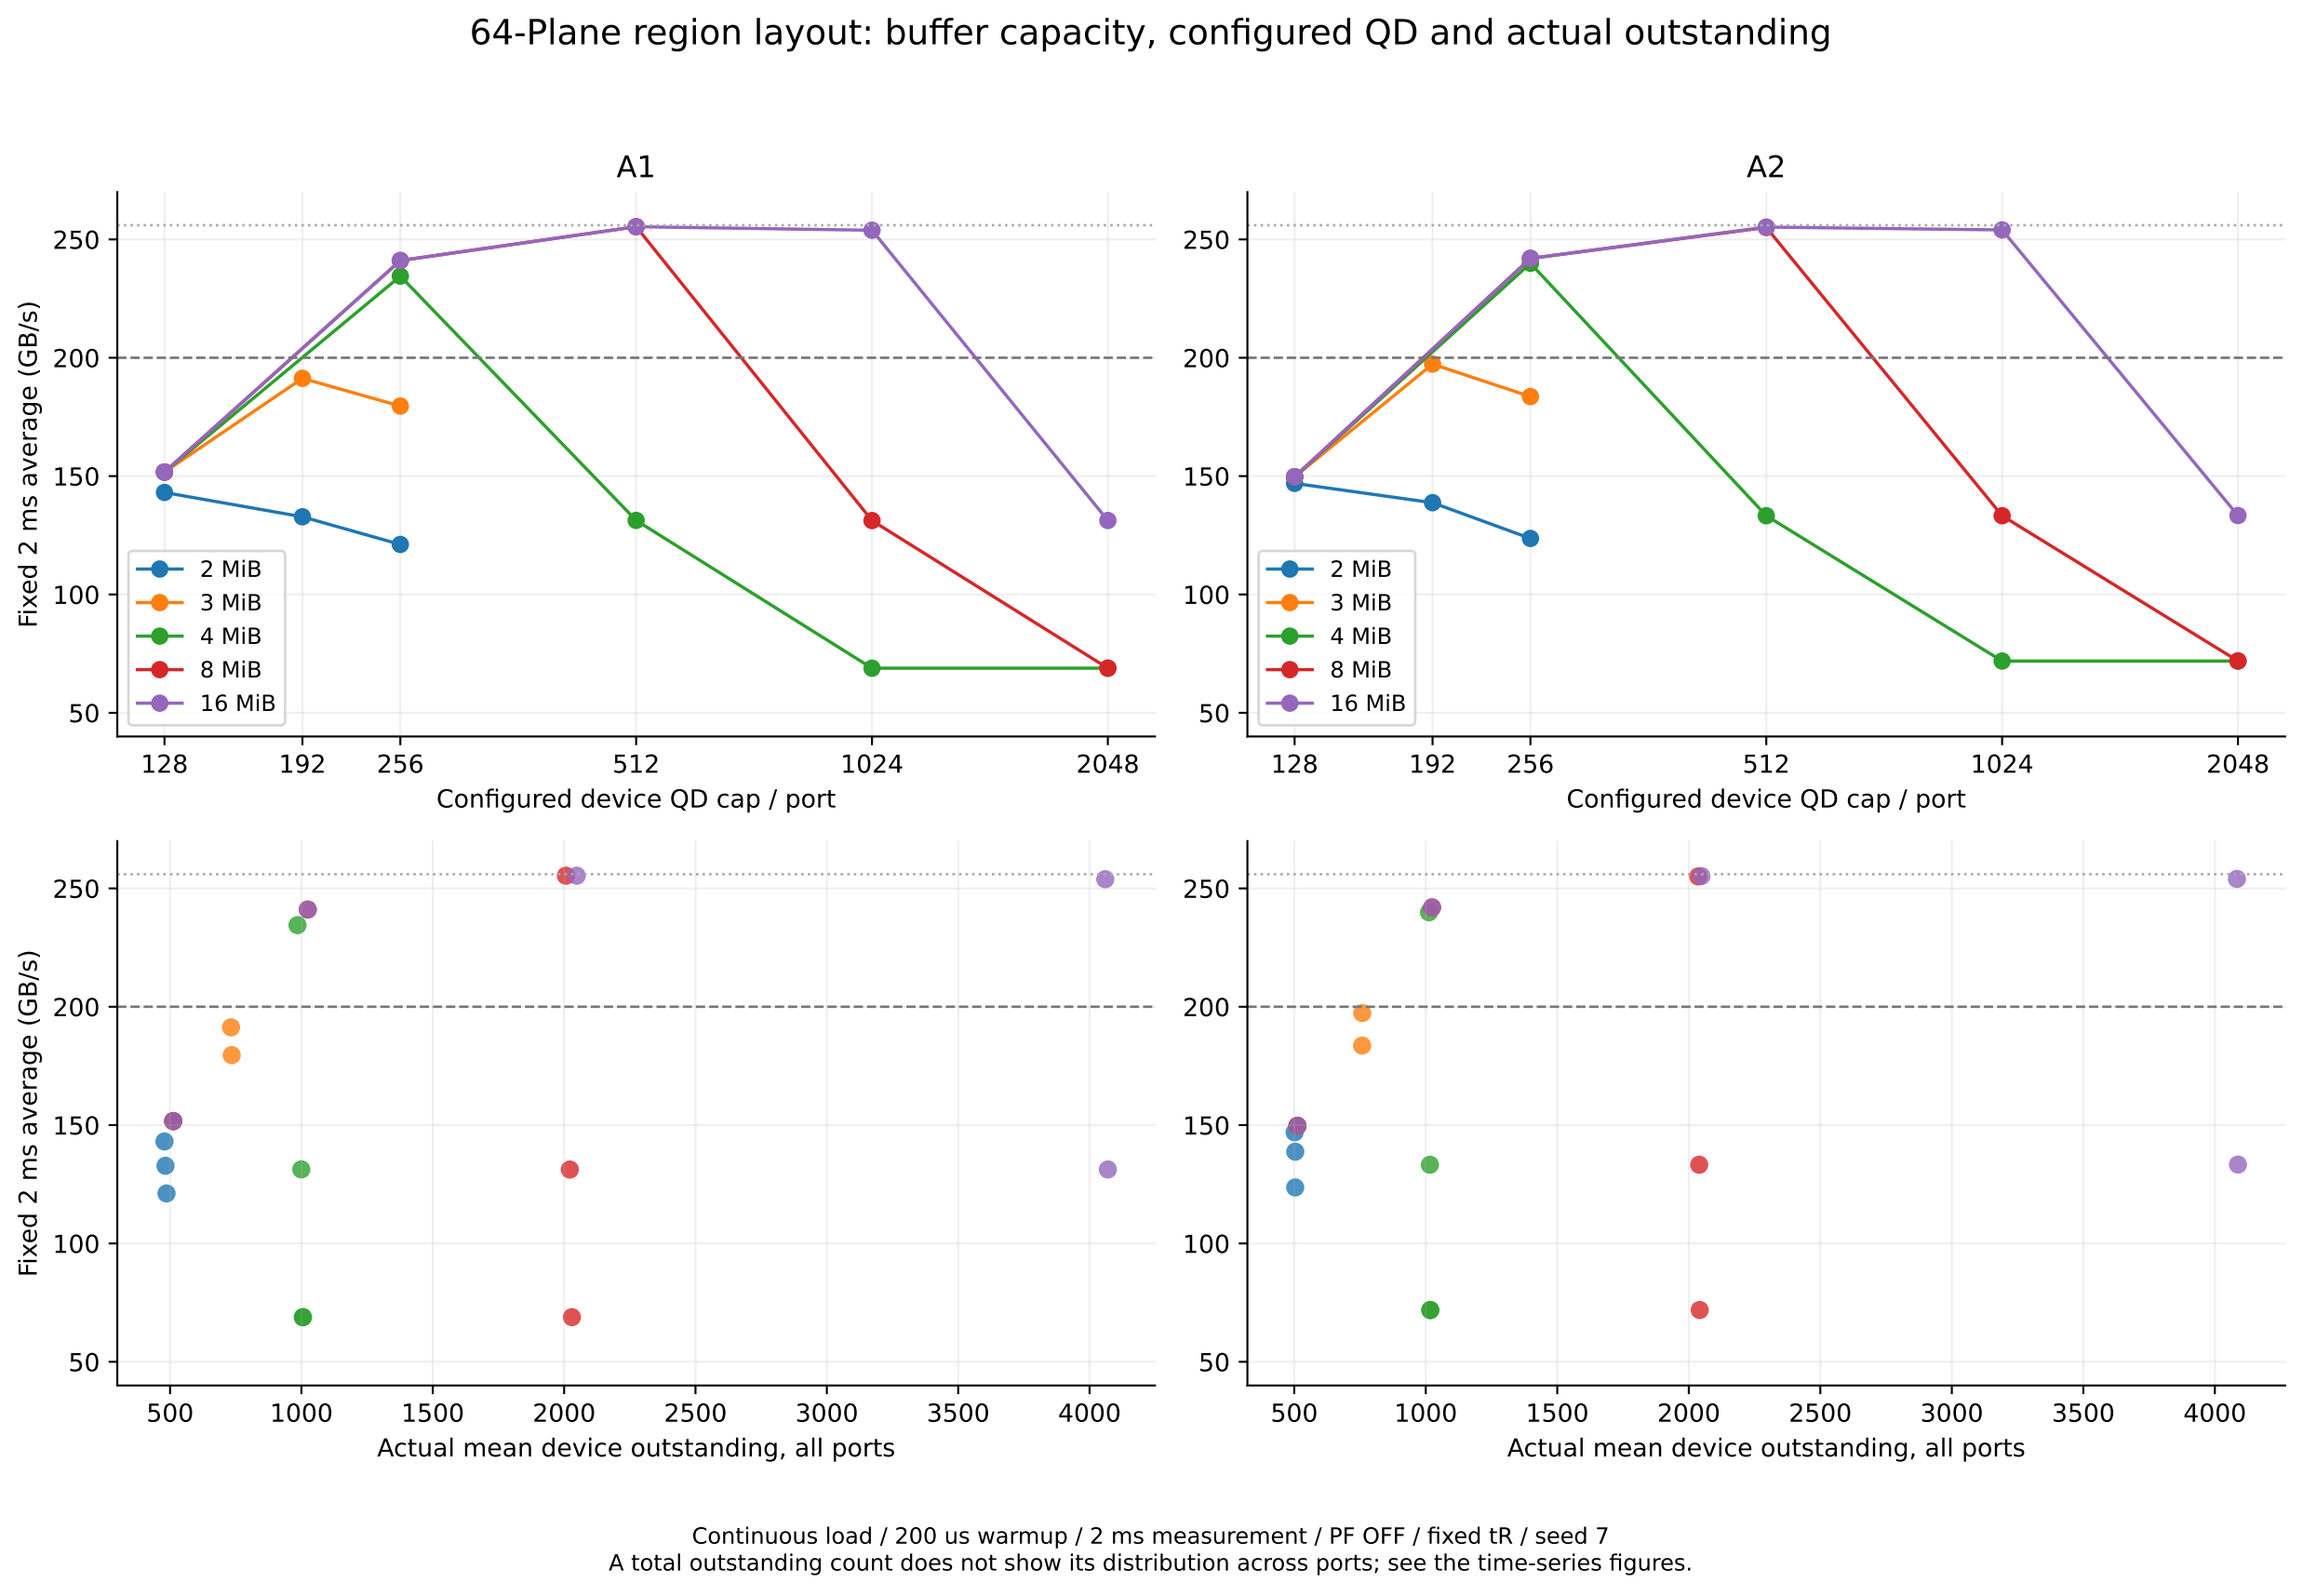
64-Plane region layout: buffer capacity, configured QD and actual outstanding
A1
A2
Fixed 2 ms average (GB/s)
Configured device QD cap / port
Actual mean device outstanding, all ports
2 MiB
3 MiB
4 MiB
8 MiB
16 MiB
128
192
256
512
1024
2048
50
100
150
200
250
500
1000
1500
2000
2500
3000
3500
4000
Continuous load / 200 us warmup / 2 ms measurement / PF OFF / fixed tR / seed 7
A total outstanding count does not show its distribution across ports; see the time-series figures.