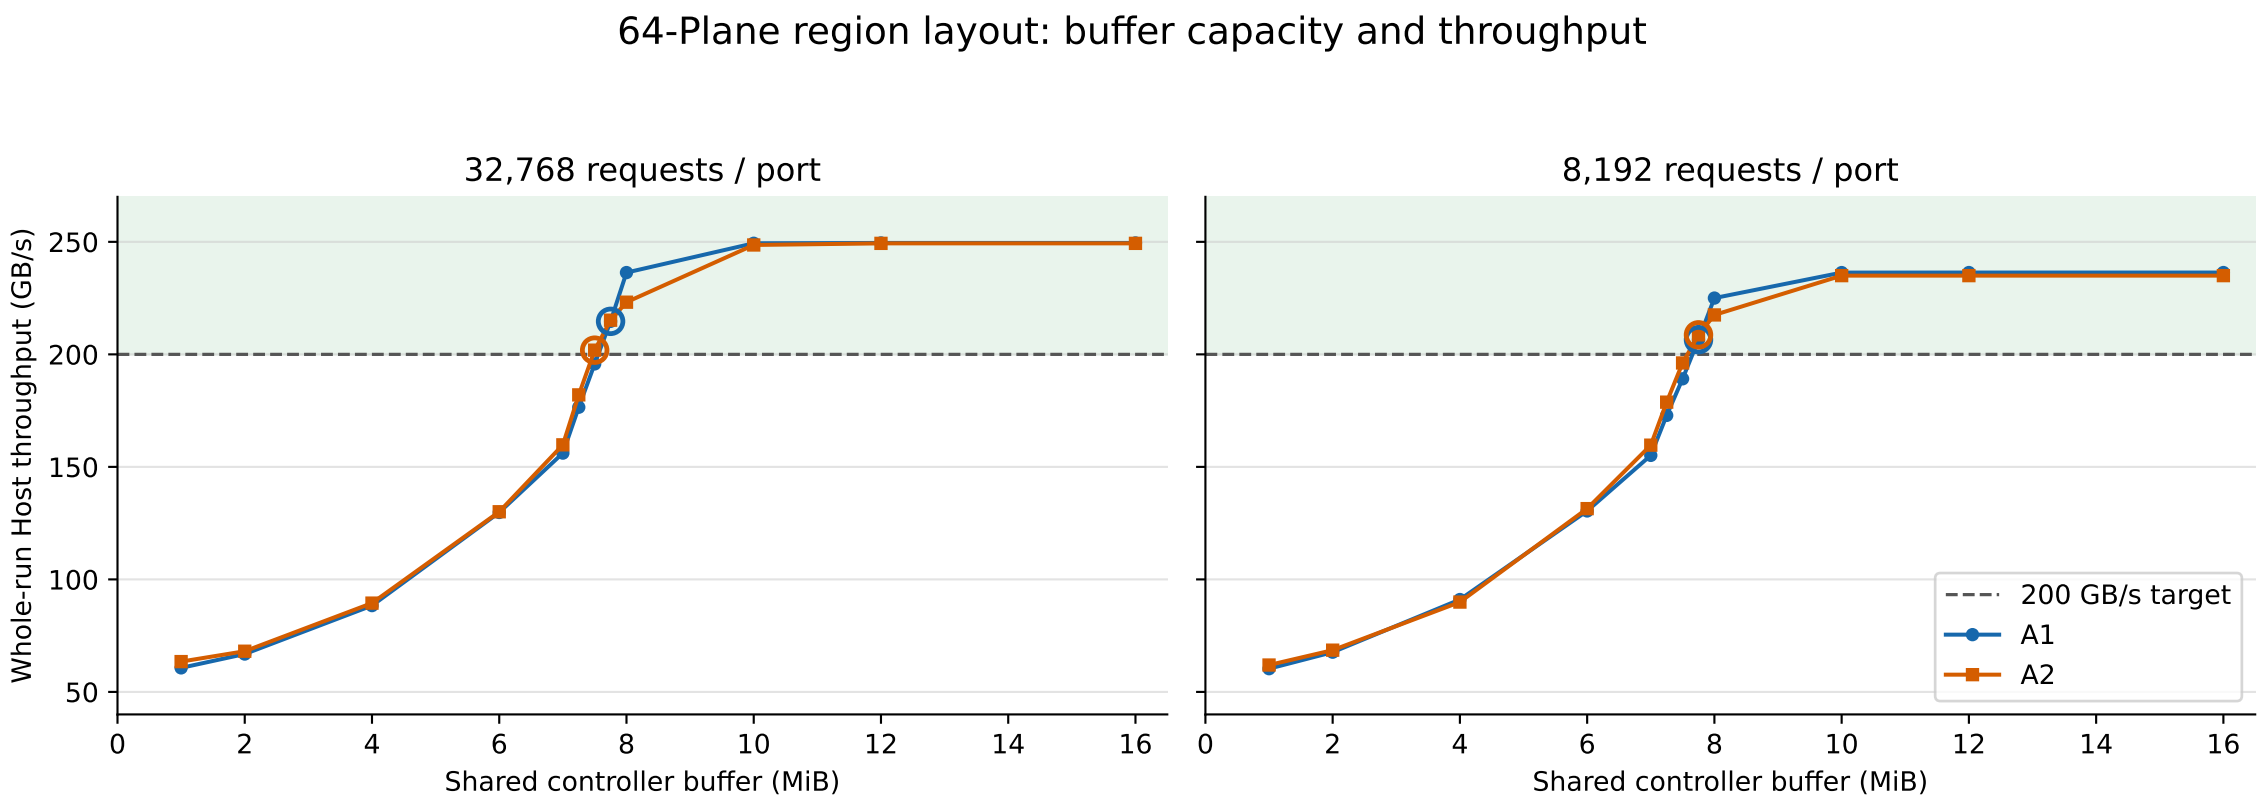
64-Plane region layout: buffer capacity and throughput
32,768 requests / port
8,192 requests / port
Whole-run Host throughput (GB/s)
250
200
150
100
50
0
2
4
6
8
10
12
14
16
Shared controller buffer (MiB)
200 GB/s target
A1
A2
Fixed tR / QD 2,048 per port / PF OFF / 4 balanced address regions / seed 7
Points are measurements; connecting lines are visual guides. Rings mark the smallest measured passing capacity.