

DSP56007ROM DSP56L007ROM

Product Brief

24-bit Digital Signal Processor

The DSP56007 and the low-voltage DSP56L007 are high-performance, programmable Digital Signal Processors (DSPs) suitable for a variety of digital audio decompression functions needing more memory, such as Dolby AC-3, MPEG Layer 2, and ATRAC. The DSP56007/L007 is an MPU-style general purpose DSP, composed of an efficient 24-bit digital signal processor core, large program and data memories, various peripherals optimized for audio, and support circuitry. As illustrated in Figure 1, the 56000-Family-compatible DSP core is fed by a large program ROM, two independent data RAMs, and two data ROMs, a Serial Audio Interface, Serial Host Interface, External Memory Interface, dedicated I/O lines, on-chip Phase-Locked Loop (PLL), and On-Chip Emulation (OnCE™) port.

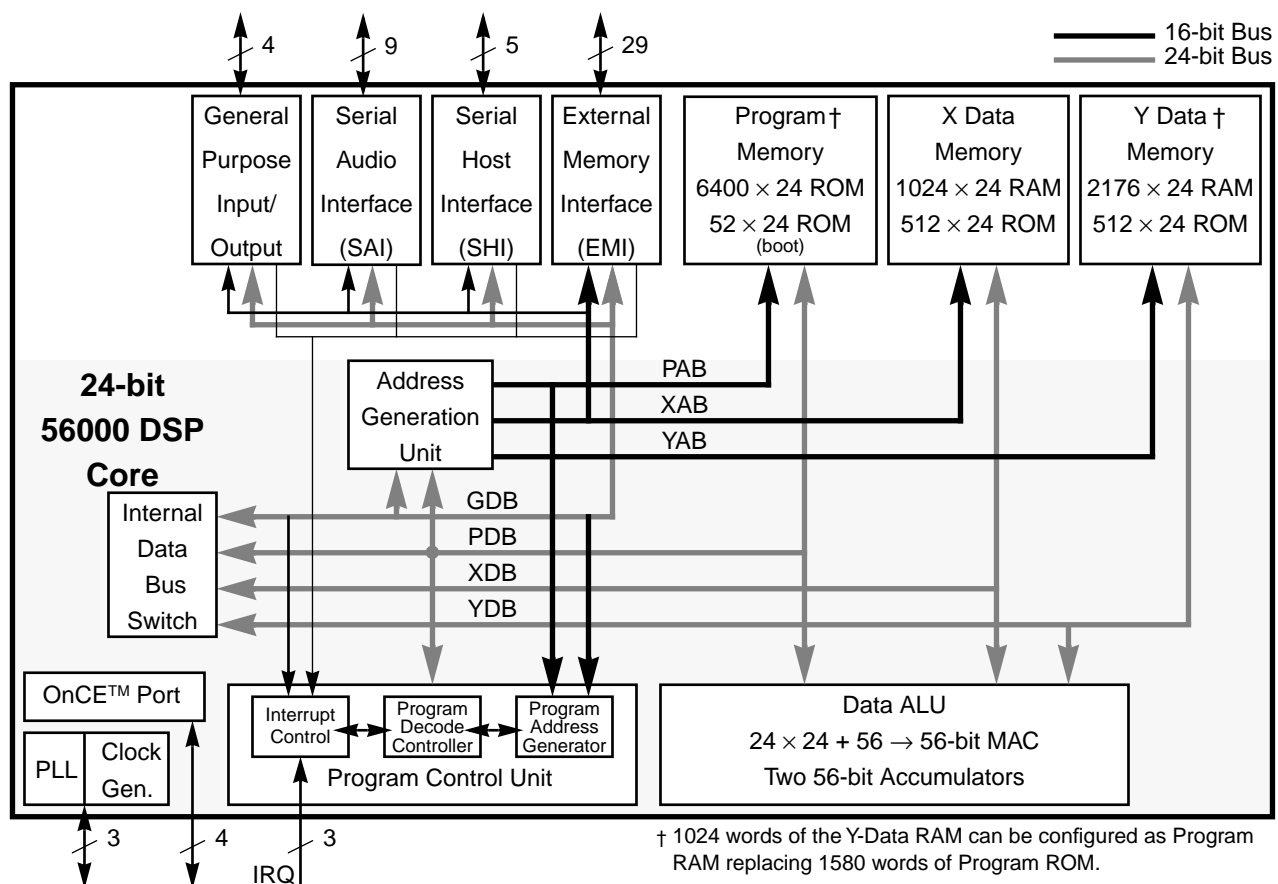


Figure 1 DSP56007/L007 Block Diagram

Motorola reserves the right to change or discontinue this product without notice.



DSP56007/L007 Features

Digital Signal Processing Core

- Efficient, object code compatible, 24-bit 56000-Family DSP engine
 - Up to 33 Million Instructions Per Second (MIPS) – 30.3 ns instruction cycle at 66 MHz
 - Up to 180 Million Operations Per Second (MOPS) at 66 MHz
 - Highly parallel instruction set with unique DSP addressing modes
 - Two 56-bit accumulators including extension byte
 - Parallel 24×24 -bit multiply-accumulate in 1 instruction cycle (2 clock cycles)
 - Double precision 48×48 -bit multiply with 96-bit result in 6 instruction cycles
 - 56-bit addition/subtraction in 1 instruction cycle
 - Fractional and integer arithmetic with support for multiprecision arithmetic
 - Hardware support for block-floating point Fast Fourier Transforms (FFT)
 - Hardware nested DO loops
 - Zero-overhead fast interrupts (2 instruction cycles)
 - Four 24-bit internal data buses and three 16-bit internal address buses for simultaneous accesses to one program and two data memories

Memory

Table 1 lists the memory configurations of the DSP56007/L007.

- On-chip Harvard architecture permitting simultaneous accesses to program and two data memories
- 6400×24 -bit on-chip program ROM* and 52×24 -bit bootstrap ROM
- 1024×24 -bit on-chip X-data RAM plus 512×24 -bit on-chip X-data ROM*
- 2176×24 -bit on-chip Y-data RAM plus 512×24 -bit on-chip Y-data ROM*
- 1024×24 bits of the Y-data RAM can be configured as program RAM, replacing 1280×24 bits of program ROM
- Bootstrap loading from Serial Host Interface or External Memory Interface
- Proprietary Bootstrap for Securing Program ROM contents

Table 1 DSP56007/L007 Memory Configurations

Mode	Program		X Data		Y Data	
	ROM	RAM	ROM	RAM	ROM	RAM
Mode 1	6400*	none	512*	1024	512*	2176
Mode 2	5120*	1024	512*	1024	512*	1152

Word width is 24 bits.

* These ROMs may be factory-programmed with data/program provided by the application developer.

Peripheral and Support Circuits

- Serial Audio Interface (SAI) includes 2 receivers and 3 transmitters, master or slave capability, and implementation of I²S, Sony, and Matshushita audio protocols; two sets of SAI interrupt vectors
- Serial Host Interface (SHI) features single master capability, 10-word receive FIFO, and support for 8-, 16- and 24-bit words
- External Memory Interface (EMI), implemented as a peripheral supporting:
 - Page-mode DRAMs (one or two chips): 64k × 4, 256k × 4, and 4M × 4 bits
 - SRAMs (one to four): 256k × 8 bits
 - Data bus may be 4 or 8 bits wide
 - Data words may be 8, 12, 16, 20, or 24 bits wide
- Four dedicated, independent, programmable General Purpose I/O (GPIO) lines
- On-chip peripheral registers memory mapped in data memory space
- Three external interrupt request pins
- On-Chip Emulation (OnCE™) port for unobtrusive, processor speed-independent debugging
- Software-programmable, Phase Locked Loop-based (PLL) frequency synthesizer for the core clock
- Power-saving Wait and Stop modes
- Fully static, HCMOS design for operating frequencies from 40, 50, and 66 MHz down to DC (DSP56L007 operates only up to 40 MHz)
- 80-pin plastic Quad Flat Pack surface-mount package; 14 × 14 × 2.45 mm; 0.65 mm lead pitch
- Completely pin compatible with the DSP56004 for easy upgrades
- 3.3 V (DSP56L007) and 5 V (DSP56007) power supply options

The DSP56007 and DSP56L007 are identical except that the DSP56007 operates at 5 volts and up to 66 MHz, while the DSP56L007 operates at 3.3 volts and up to 40 MHz with a resultant reduction in power consumption and the need for fewer batteries in a portable application. The DSP56007/L007 is a pin-compatible version of the DSP56004 with a different memory configuration.

Documentation

The three documents listed in Table 2 are required for a complete description of the DSP56007 / L007 and are necessary to properly design with the part. Documentation is available from a local Motorola distributor, a Motorola semiconductor sales office, or a Motorola Literature Distribution Center listed below.

Table 2 Additional DSP56007/L007 Documentation


Document Name	Description	Order Number
DSP56000 Family Manual	Detailed description of the 56000-family architecture and the 24-bit core processor and instruction set	DSP56KFAMUM/AD
DSP56004/007 User's Manual	Detailed description of memory, peripherals, and interfaces	DSP56004UM/AD
DSP56004/007 Data Sheet	Electrical and timing specifications, and pin and package descriptions	DSP56004/D



OnCE is a trademark of Motorola, Inc.

All product and brand names appearing herein are trademarks or registered trademarks of their respective holders.

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typical", must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part.

Motorola and  are registered trademarks of Motorola, Inc.
Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Literature Distribution Centers

USA/EUROPE: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona USA 85036.

JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141 Japan.

ASIA-PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbor Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.



MOTOROLA

