

Product Brief

24-bit Digital Signal Processor

The DSP56301, is the first member in the new DSP56300 Family. This family uses a high performance, single clock cycle per instruction engine providing two fold performance increase over Motorola's popular DSP56000 Family, while retaining code compatibility. Several significant architectural enhancements include a barrel shifter, 24 bit addressing, instruction cache and DMA functionality.

The DSP56301 offers 66/80 MIPS using an internal 66/80 MHz clock at 3.0-3.6 volts. The DSP56300 family offers a new level of performance in MIPS, rich instruction set and low power dissipation enabling a new generation of products in wireless, telecommunications, and multimedia.

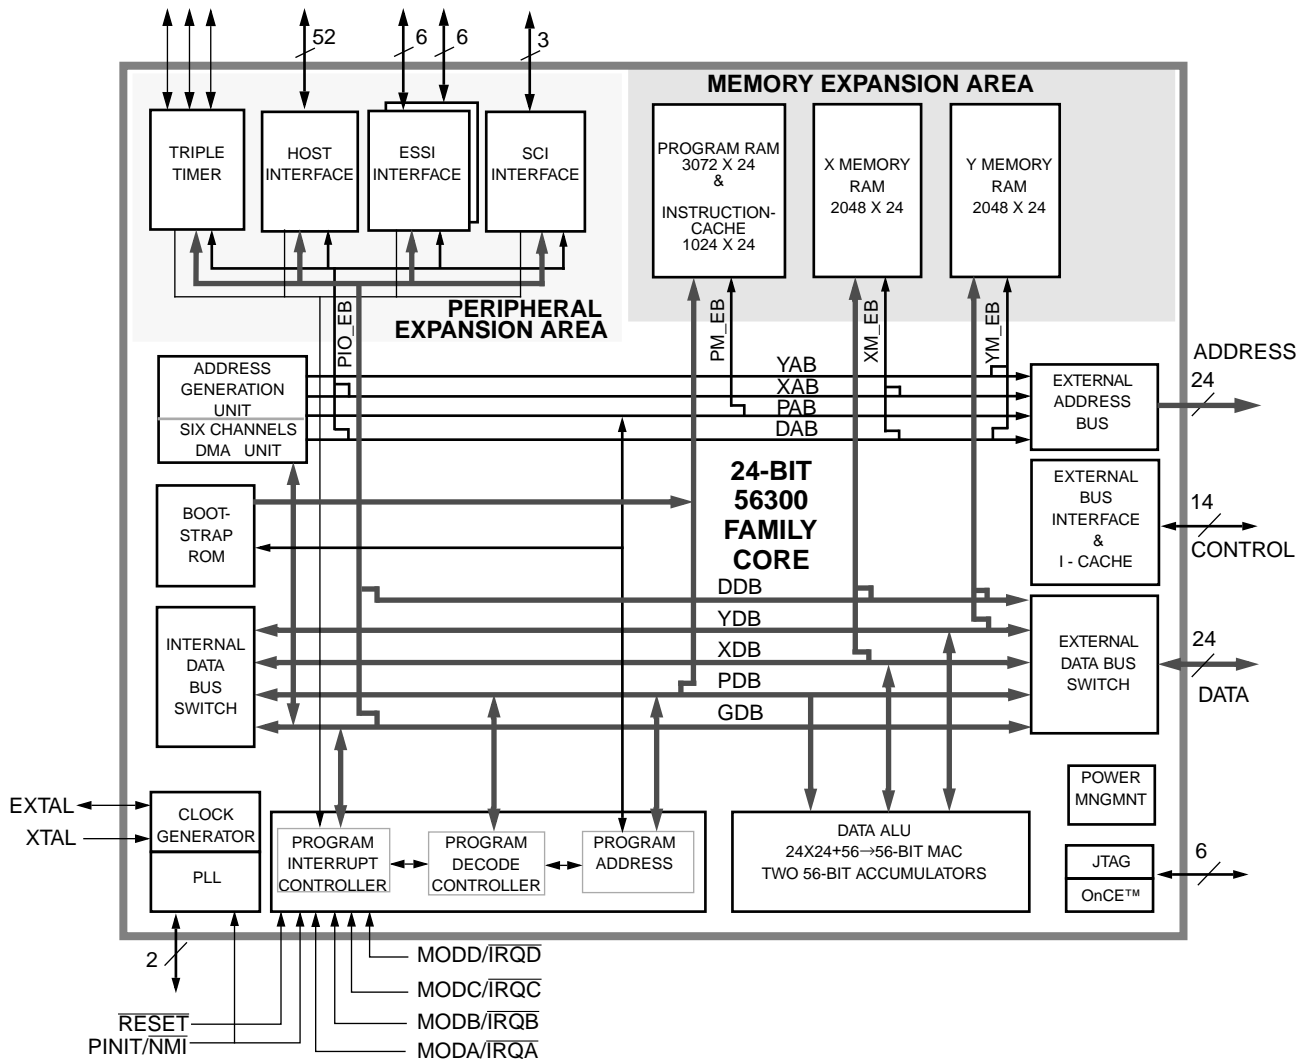


Figure 1 DSP56301 Block Diagram

Motorola reserves the right to change or discontinue this product without notice.



MOTOROLA

DSP56301 Features

DSP56300 Family Core

- 66/80 MIPS with a 66/80 MHz internal clock at 3.0-3.6 volts
- Single clock per instruction execution
- Code compatible with DSP56000 family
- Fully-static logic with operation to DC
- Wait, stop and intelligent power control circuitry powers down unused memories, peripherals and core logic on each individual instruction.
- OnCE with added JTAG support for system debugging and testing
- On-chip PLL

ALU Enhancements over DSP56000

- Fully pipelined barrel shifter supports bit stream parsing and generation
- Conditional ALU instruction
- 16 bit arithmetic supports cellular and videotelephony standards

Address Generation Unit Enhancements over DSP56000

- 24 bit addressing provides 16M word addressing for Program, X and Y memories
- Program Counter relative addressing improves operating system and compiler efficiency
- Immediate offset addressing

Program Controller Enhancements over DSP56000

- Hard stack extension in data memory allows unlimited stack depth without programmer overhead
- Support for Instruction Cache

Direct Memory Access Unit

- 6 channel fully concurrent DMA supports 120 Mbyte/sec transfers at 80 MHz
- Dedicated address and data buses support concurrent memory accesses
- Supports peripheral interrupts, internal and external memory reads/writes

DSP56301 Peripherals/External Buses

- Modular peripheral and memory design
- Glueless interface to PCI, ISA, and other DSP56301 buses
- One Serial Communication Interface module
- Two Enhanced Serial Synchronous Interface modules
- Three independent Timer modules
- Glueless interface to SRAM, Synchronous SRAM, DRAM and memory mapped peripherals.
- Off-chip expansion to 2^{24} words for program, X and Y memory

DSP56301 On-chip memories

- On-Chip 2048×24 Bit X Data RAM
- On-Chip 2048×24 Bit Y Data RAM
- On-Chip 3072×24 Bit Program RAM
- On-Chip 1024×24 Bit Instruction Cache/Program RAM
- On-Chip 192×24 Bit Bootstrap ROM

Documentation

The three documents listed in Table 1 are required for a complete description of the DSP56301 and are necessary to properly design with the part. Documentation is available from a local Motorola distributor, a Motorola semiconductor sales office, or a Motorola Literature Distribution Center listed on the back page.


Table 1 DSP56301 Documentation

Topic	Description	Order Number
DSP56300 Family Manual	Detailed description of the 56300-family architecture and the 24-bit core processor and instruction set	DSP56300FAM/AD
DSP56301 User's Manual	Detailed description of memory, peripherals, and interfaces	DSP56301UM/AD
DSP56301 Data Sheet	Electrical and timing specifications, and pin and package descriptions	DSP56301/D



OnCE is a trademark of Motorola, Inc.

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typical", must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part.

Motorola and  are registered trademarks of Motorola, Inc.
Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Literature Distribution Centers

USA/EUROPE: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036 USA

JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141 Japan.

ASIA-PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbor Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.



MOTOROLA