

Jockey Club Project IDEA Software Installation Guide (macOS)

Please Download the Following Software:


1. [Arduino IDE](#)
2. [VCV Rack 2](#)
3. [MIDI Monitor](#)

Software 1: Arduino IDE

Download Page: <https://www.arduino.cc/en/software>

1. Get the **latest version** (Arduino IDE 2.3.6) from the Downloads page. Select the suitable macOS option for your computer.

Bring Your Projects to Life with Arduino Software

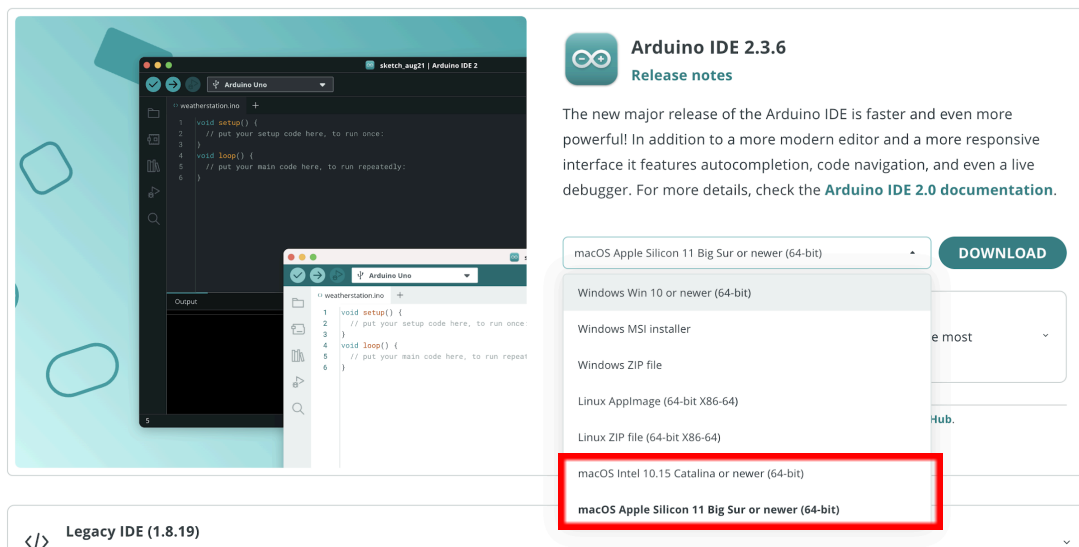

Arduino IDE 2.3.6
Release notes

The new major release of the Arduino IDE is faster and even more powerful! In addition to a more modern editor and a more responsive interface it features autocompletion, code navigation, and even a live debugger. For more details, check the [Arduino IDE 2.0 documentation](#).

macOS Apple Silicon 11 Big Sur or newer (64-bit) **DOWNLOAD**

Windows Win 10 or newer (64-bit)

Windows MSI installer

Windows ZIP file

Linux Appliance (64-bit X86-64)

Linux ZIP file (64-bit X86-64)

macOS Intel 10.15 Catalina or newer (64-bit)

macOS Apple Silicon 11 Big Sur or newer (64-bit)

Legacy IDE (1.8.19)

2. Click “Download”.

Bring Your Projects to Life with Arduino Software



Arduino IDE 2.3.6
[Release notes](#)

The new major release of the Arduino IDE is faster and even more powerful! In addition to a more modern editor and a more responsive interface it features autocompletion, code navigation, and even a live debugger. For more details, check the [Arduino IDE 2.0 documentation](#).

macOS Apple Silicon 11 Big Sur or newer (64-bit) **DOWNLOAD**


Nightly Builds
Download a preview of the incoming release with the most updated features and bugfixes.

The Arduino IDE 2.0 is open source and its source code is hosted on [GitHub](#).


3. Run the installer. Drag the “Arduino IDE” icon towards the “Applications” icon. Please allow the driver installation process when you get a warning from the operating system.



4. All the files necessary to run the Arduino IDE software will be extracted and installed to the Application folder. Click the Arduino IDE icon. Click "Open" when you get a warning from your system:

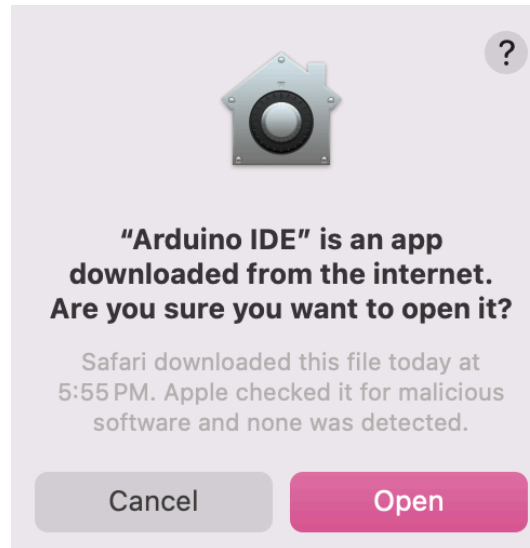

5. You should get an interface like this:

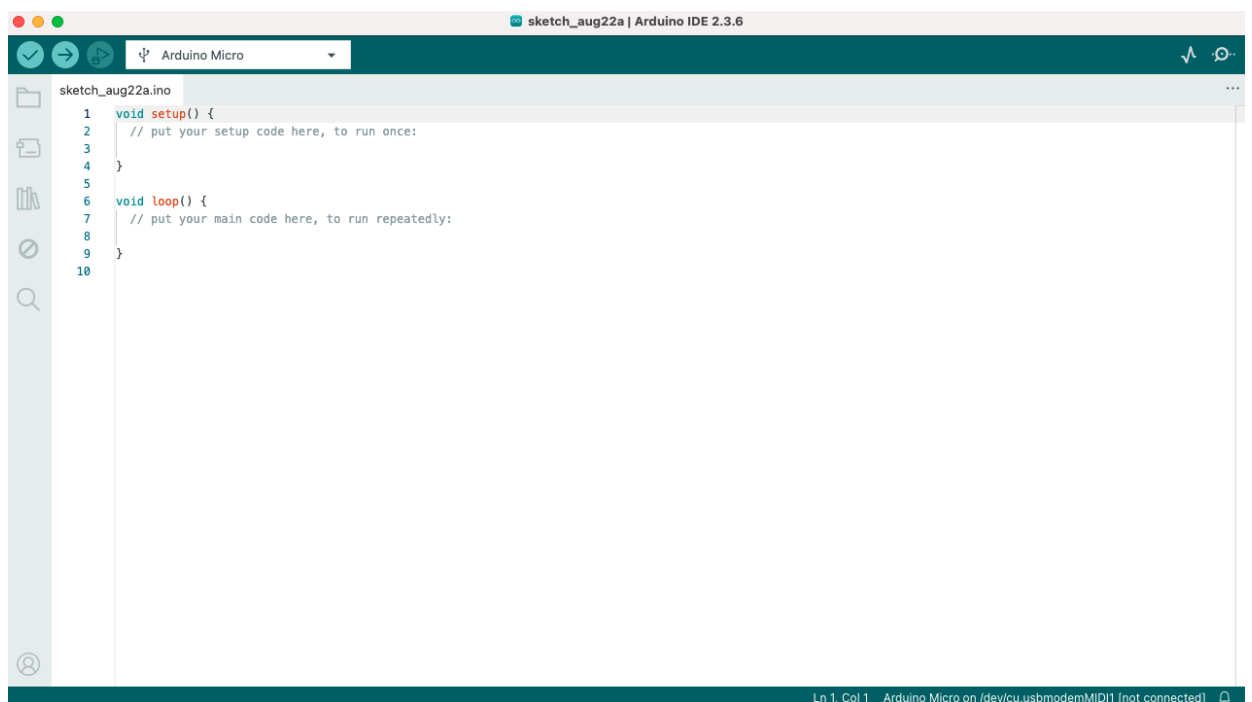

Software 2: VCV Rack 2

Downloads Page: <https://vcvrack.com/Rack#get>

1. Get the **latest version** (2.6.4) from the Rack 2 Free section . Click “macOS”.

GET VCV RACK 2

Rack 2 Free

Standalone
Free modules
Open-source
Community support

2.6.4 DOWNLOAD

Windows

macOS

Linux

Changelog

Rack 2 Pro


VST2, VST3, Audio Unit, CLAP, standalone
Free and Pro modules
Professional support

\$149


BUY PAYPAL

Available in VCV+
for as low as \$19/month.



2. Run the installer. Click “Continue”. Please allow the installer process when you get a warning from the operating system.

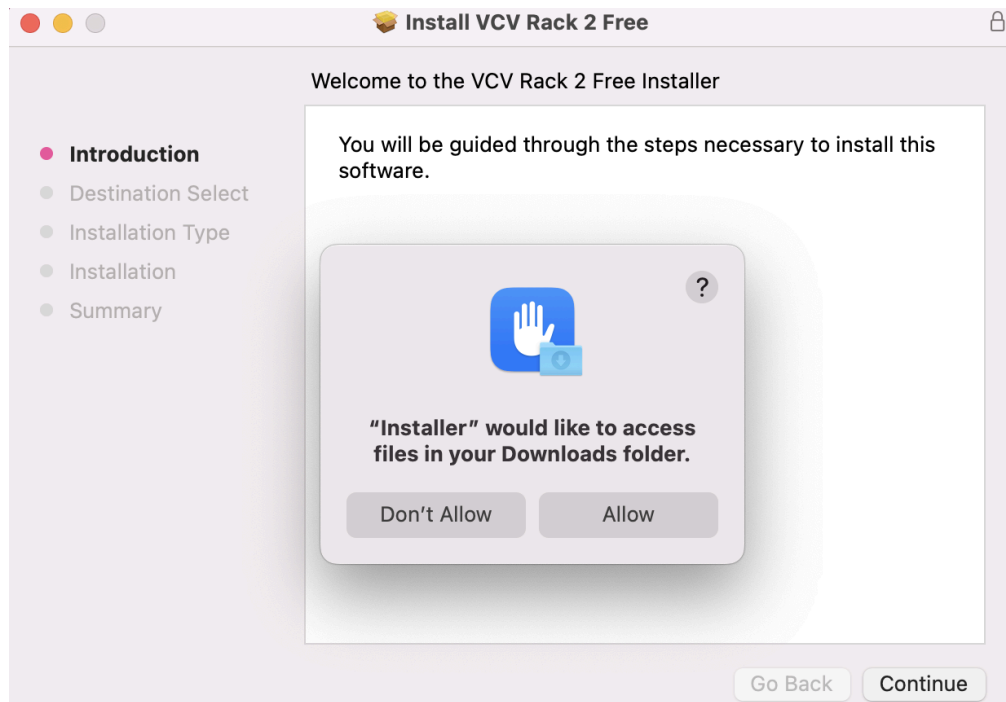


3. Select the suitable install option for your computer. Click “Continue”.

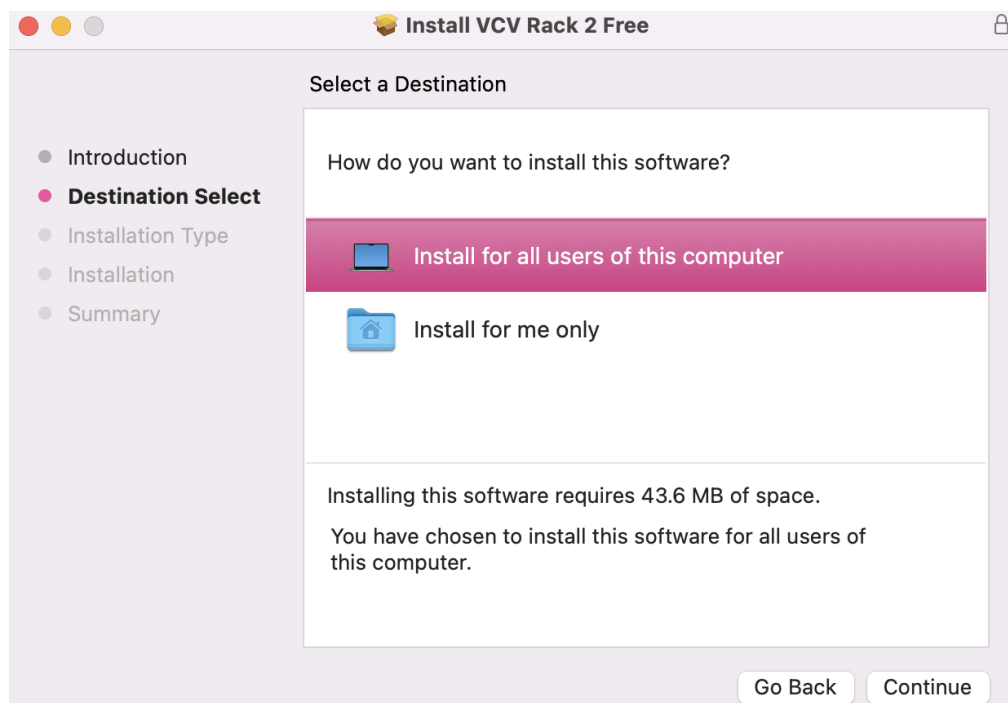


- Click "Install". Please allow the installer process when you get a warning from the operating system.

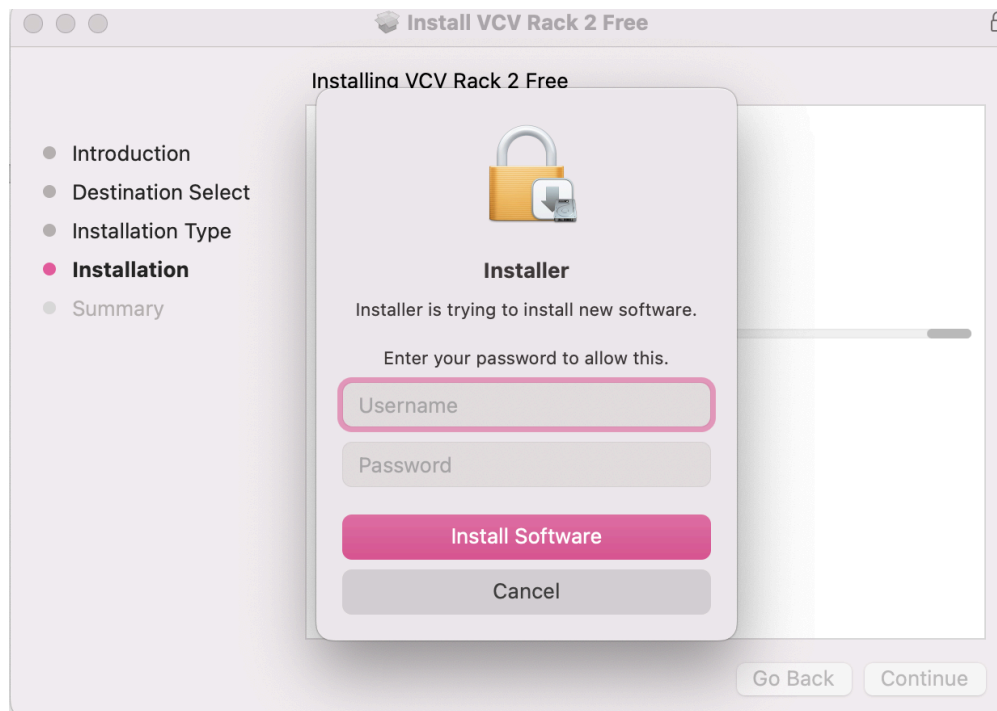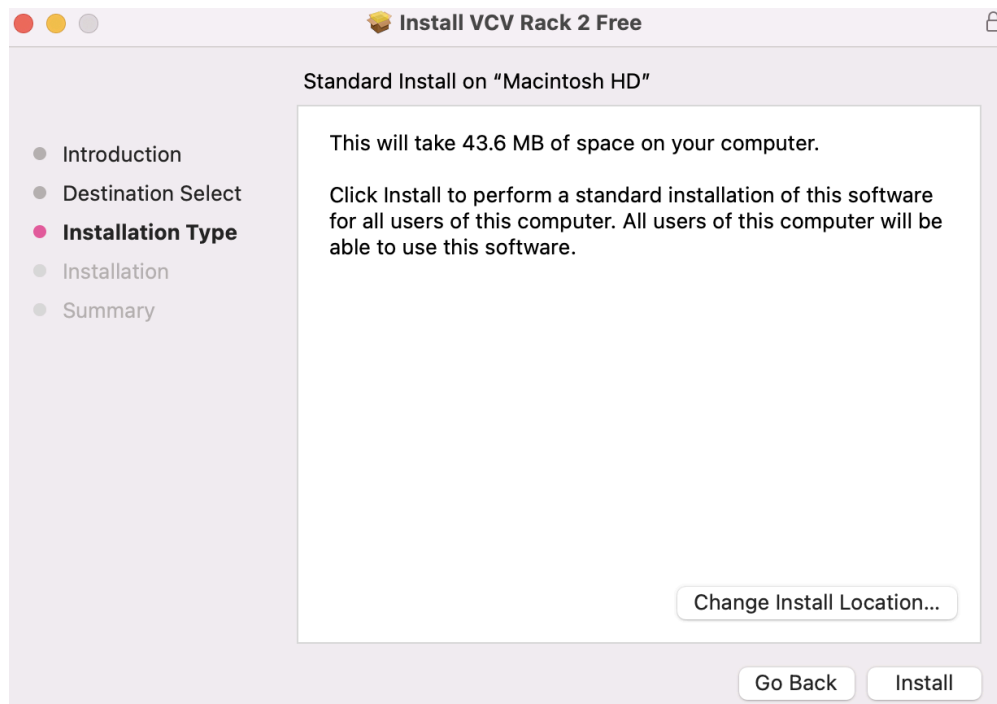

5. All the files necessary to run the VCV Rack 2 software will be extracted and installed to the Application folder. Click "Close".

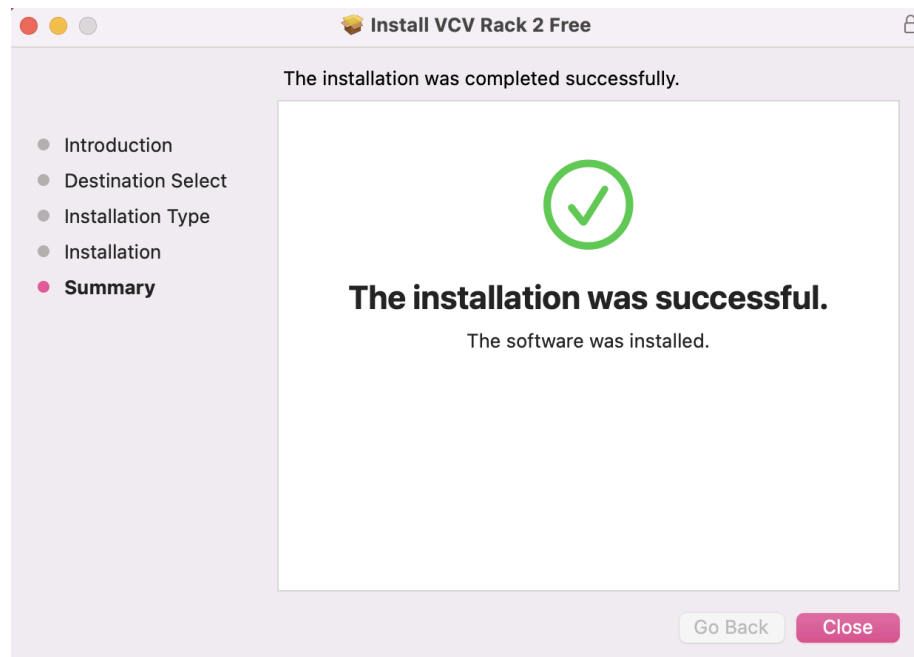


6. Click on the VCV Rack 2 icon. Click "Open" when you get a warning from your system. You should get an interface like this:

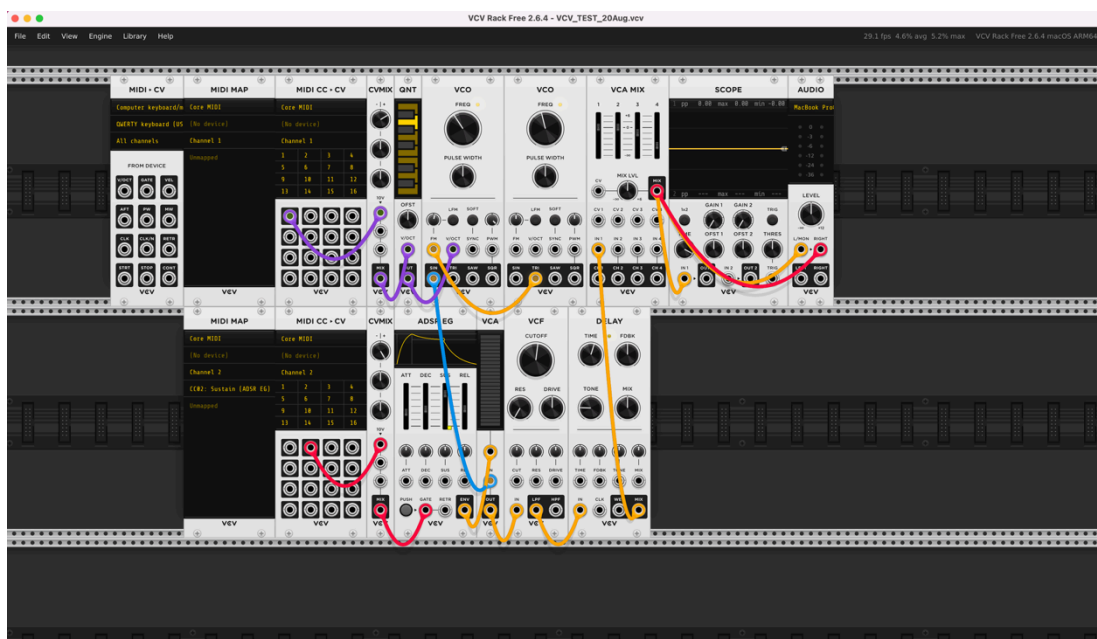

Software 3: MIDI Monitor

Downloads Page: <https://www.snoize.com/MIDIMonitor/>

1. Get the **latest version (1.5.4)** from the MIDI Monitor Section. Click Download.

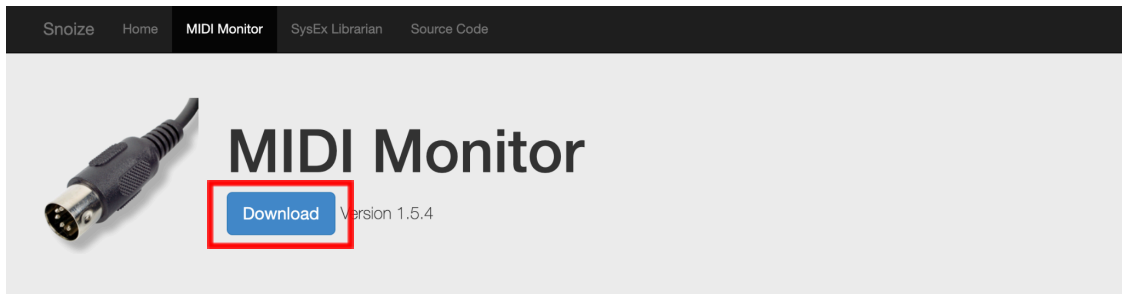


MIDI Monitor is an app to display MIDI signals going in and out of your Mac. Musicians will find it handy for tracking down confusing MIDI problems, and programmers can use it to test MIDI drivers and applications.

MIDI Monitor is free to download and use. The [source code](#) is available as Open Source, under the BSD license.


System Requirements

- Mac OS X 10.13 or later (High Sierra, Mojave, Catalina, Big Sur, Monterey, Ventura, Sonoma, Sequoia, Tahoe)


2. Run the installer. Drag the “MIDI Monitor” icon towards the “Applications” icon. Please allow the driver installation process when you get a warning from the operating system.

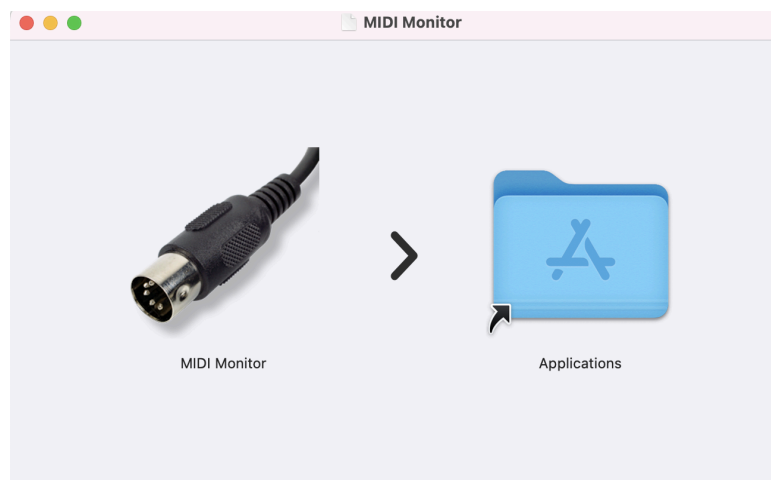

3. All the files necessary to run the MIDI Monitor software will be extracted and installed to the Application folder. Click the MIDI Monitor icon. Click "Open" when you get a warning from your system:

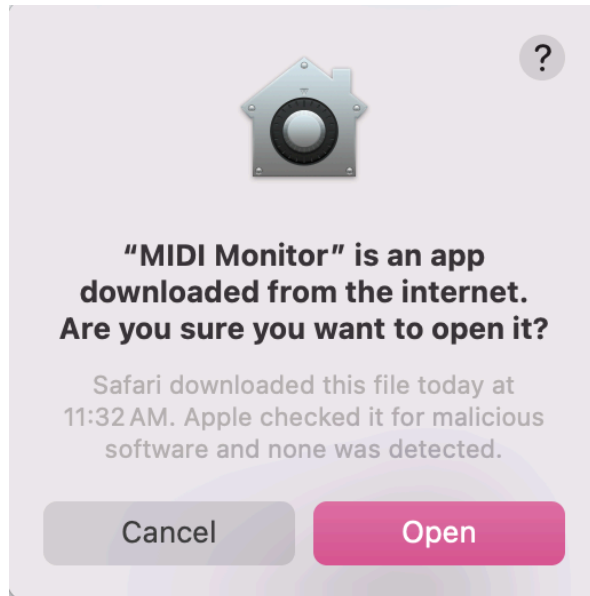

4. Click "Continue".

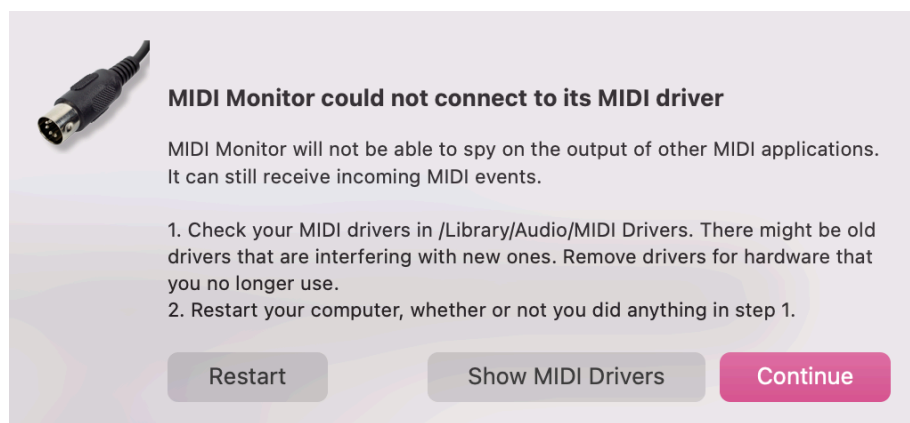

5. You should get an interface like this:

