

Illustra Standard Gen2 12MP Fisheye Camera



Key Features

- H.265+ / H.265/ H.264+ / H.264 MJPEG coding
- 1:1 (3000x3000) @30fps
- ICR auto switch, true day & night
- 10~20m IR view distance
- Support Defog
- Support 3D DNR, digital WDR, BLC, HLC, Smart IR
- Support triple streams
- Support ROI
- Support two-way audio and alarm input/output
- Built-in microphone and audio input
- Support up to 256GB TF card storage
- Support DC 12V / PoE
- IP67


Specification

Camera	
Imager	1 / 1.7" CMOS
Effective Pixels	4000x3000
Min. Illumination	0.01 Lux,F2.0,AGC ON; 0 lux with IR
Shutter Speed	PAL: 1 / 25 s ~ 1 / 100000 s NTSC: 1 / 30 s ~ 1 / 100000 s
S/N Ratio	≥50 dB
Angle Adjustment	-
Lens	
Focal Length	1.65 mm @F2.0, Fixed lens
ABF	-
Iris Type	Fixed Iris
Field of View	Horizontal: 360°(Ceiling mounting), 360°(Desktop), 180°(Wall mounting)
Focus Control	-
Lens mounting	M12
Video	
Video Compression	H.265+/H.264+/H.265/H.264/MJPEG
H.264 Compression Standard	Base Line / Main Profile / High Profile
H.265 Compression Standard	Main Profile @Leve4.1 High Tier
Resolution (Fisheye + Panoramic + PTZ*3)	Fisheye view: 50Hz: 20fps@3000x3000 25fps@(2160x2160,1440x1440,1920x1920,960x960) 60Hz: 20fps@3000x3000 30fps@(2160x2160,1440x1440,1920x1920,960x960) Panoramic view: 50Hz: 15fps@(4000x3000, 3840x2160) 60Hz: 15fps@(4000x3000, 3840x2160) PTZ*3: 50Hz: 15fps@(1280x720) * 3 60Hz: 15fps@(1280x720) * 3
Resolution (Fisheye + PTZ*4)	Fisheye view: 50Hz: 25fps@(3000x3000,2160x2160,1440x1440,1920x1920, 960x960) 60Hz: 30fps@(3000x3000,2160x2160,1440x1440,1920x1920, 960x960) PTZ*4 View: 50Hz: 15fps@(1280x720) * 4 60Hz: 15fps@(1280x720) * 4

Resolution (Fisheye + PTZ Fusion * 4)	Fisheye view: 50Hz: 25fps@ (3000x3000, 2160x2160, 1440x1440, 1920x1920, 960x960) 60Hz: 30fps@ (3000x3000, 2160x2160, 1440x1440, 1920x1920, 960x960) PTZ fusion* 4 view: 50Hz: 20fps@2560x1440 60Hz: 20fps@2560x1440
Sub Stream	Fisheye view 50Hz: 25fps@1920x1920, 960x960, 480x480 Fisheye view 60Hz: 30fps@1920x1920, 960x960, 480x480
Video Bit Rate	128 Kbps ~ 16 Mbps
Multiple Streaming	Triple streams
Smart Codec	ROI, 8 zones
Bitrate Control	VBR / CBR
Quality Control	Five levels under VBR; Freely adjustable under CBR
Image Setting	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpness, NR, etc.
Audio	
Audio Communication	Bi-directional audio (2-way)
Audio Compression Format	G.711A/G.711U, AAC
Audio Bit Rate	128 Kbps
Operational	
Day & Night	IR cut filter with auto switch
Backlight Compensation	Yes
Wide Dynamic Range	Digital WDR
IR Distance	10~20 meters
Digital Noise Reduction	2D/3D DNR
Digital Zoom	Yes
Defog	Yes
Corridor Pattern	Yes
Video Privacy	Yes
Alarm Triggers	Motion detection, Intelligent video analytics, Network disconnect, SD card full, SD card error
Edge Storage	Built-in micro SD card slot, up to 256GB
Backfilling	Yes (Available in future firmware release)
Intelligent Video Analytics	
Perimeter Protection	Mode 1 (Wall mounting or desktop): Region intrusion/region entrance/region exiting/target counting by line (human/vehicle classification), crowd density detection Mode 1/2/3 (ceiling mounting): (Human) region intrusion/region entrance/region exiting/target counting by line, crowd density detection, heat map
Exceptional Detection	Panoramic: Scene change, video blur and video color cast detection

Network	
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, 802.1x, UPnP, HTTP, HTTPS, Qos, RTMP
Cyber Security	HTTPS / IP Filter / IEEE 802.1X / Blacklist & whitelist / account security/telnet access control/serial password
Online Connection	Support simultaneous monitoring for up to 6 users; Support multi-stream real time transmission
Remote Monitoring	Webviewer browsing, Holis Pro, Holis Lite, ExacqVision, victor
API	ONVIF, HAPI3, iAPI3 (Available in future firmware release)
Interface	
Network	RJ45
Audio	Line in × 1, Line out × 1; Mic in × 2
Video Output	CVBS (BNC × 1)
Onboard Storage	Built-in micro SD card slot
RS485	Support
Alarm	Input × 1, Output × 1
Hardware Reset	Yes
Environmental	
Operating Temperature	- 30 °C ~ 60 °C
Operating Humidity	-30°C to 60°C (-22°F to 140 °F). Humidity 95% or less (non-condensing)
Ingress Protection	IP 67
Vandal Resistance	-
General	
Power Supply	DC 12V / PoE
Power Consumption	< 10.5W
Dimensions (mm)	Φ130.6 × 46.3
Material	Aluminum alloy
Weight	Approx. 0.45kg
Installation	Ceiling mounting, wall mounting, desktop
Certification	CE, FCC, Rohs

Dimensions

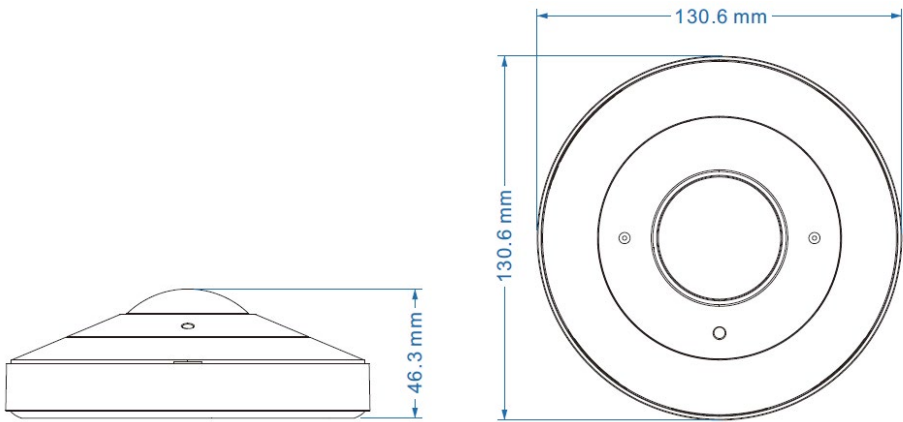

Ordering Information

Model	Description
ISV-F12Z172S-N	Illustra Standard Gen2 12MP Fisheye camera, 1/1.7" CMOS, 1.65mm, Micro SD, DC12V/PoE, IP67

About Johnson Controls

At Johnson Controls, we transform the environments where people live, work, learn and play. From optimising building performance to improving safety and enhancing comfort, we drive the outcomes that matter most. We deliver our promise in industries such as healthcare, education, data centers, and manufacturing. With a global team of 105,000 experts in more than 150 countries and more than 130 years of innovation, we are the power behind our customers’ mission. Our leading portfolio of building technology and solutions includes some of the most trusted names in the industry, such as Tyco®, York®, Metasys®, Ruskin®, Titus®, Frick®, Penn®, Sabroe®, Simplex®, Ansul® and Grinnell®.

For more information, visit www.tyco-apac.com