

## 2MP 32x Outdoor Network IR PTZ Camera



### Key Features

- 1/2.8" progressive scan CMOS
- 32x optical zoom
- True WDR, up to 128dB
- 3D DNR, HLC & BLC
- 2MP resolution(1920 × 1080)
- H.265+/H.265/H.264/MJPEG
- Intelligent video analytics
- Onboard storage
- Up to 300m IR distance with Smart IR
- 2-way audio & alarm in/out
- Face detection / capture
- Vehicle detecting and tracking
- Smart tracking
- PoE+ and DC24V
- IP67/IK10


### Specification

| Camera                     |                                                                                                                                                              |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Imager                     | 1 / 2.8" Progressive Scan CMOS                                                                                                                               |
| Effective Pixels           | 1920x1080                                                                                                                                                    |
| Min. Illumination          | Color: 0.00125Lux @ (F1.65, AGC ON);<br>B/W: 0.00025Lux @ (F1.65, AGC ON); 0 Lux with IR                                                                     |
| Shutter Speed              | 1/30 s – 1/30,000 s                                                                                                                                          |
| S/N Ratio                  | ≥52dB                                                                                                                                                        |
| Angle Adjustment           | Any angle                                                                                                                                                    |
| Lens                       |                                                                                                                                                              |
| Focal Length               | 4.8 ~154 mm                                                                                                                                                  |
| Iris Type                  | DC-Iris                                                                                                                                                      |
| Field of View              | Horizontal: 59.38° ~2.28°; Vertical: 35.74° ~ 1.29°                                                                                                          |
| Focus Control              | Auto / Manual                                                                                                                                                |
| Lens Mount                 | -                                                                                                                                                            |
| PTZ                        |                                                                                                                                                              |
| Pan / Tilt Range           | 360°/-25° ~ 155°                                                                                                                                             |
| Pan / Tilt Speed           | 0.1° ~360°/s, 0.1° ~210°/s; (Preset speed≥180°/s)                                                                                                            |
| Zoom                       | Yes                                                                                                                                                          |
| Preset                     | 360 presets                                                                                                                                                  |
| Sequence                   | 8 cruises, up to 16 presets for each cruise                                                                                                                  |
| Trace                      | 4 trace, record time 3 minutes for each trace                                                                                                                |
| Power off Memory           | Yes                                                                                                                                                          |
| Heater                     | Yes                                                                                                                                                          |
| Video                      |                                                                                                                                                              |
| Video Compression          | H.265+/H.264+/H.265/H.264/MJPEG                                                                                                                              |
| H.264 Compression Standard | H.264/AVC codec BP/MP/HP, Level 5.1                                                                                                                          |
| H.265 Compression Standard | H.265/HEVC codec MP, level 5.0                                                                                                                               |
| Resolution                 | 1920×1080 / 1280×960 / 1280×720 / D1 / CIF                                                                                                                   |
| Max.Frame Rate             | 30fps                                                                                                                                                        |
| Video Bit Rate             | 64 Kbps ~ 16 Mbps                                                                                                                                            |
| Multiple Streaming         | Triple streams                                                                                                                                               |
| Main Stream                | 60Hz: 1920×1080 / 1280×960 / 1280×720(1~30fps)<br>50Hz: 1920×1080 / 1280×960 / 1280×720(1~25fps)                                                             |
| Sub Stream                 | 60Hz: 704×480 / 640×480 / 352×240(1~30fps)<br>50Hz: 704×576 / 640×480 / 352×288(1~25fps)                                                                     |
| Third Stream               | 60Hz: 1920×1080 / 1280×960 / 1280×720 / 704×480 / 640×480 / 352×240(1~30fps)<br>50Hz: 1920×1080 / 1280×960 / 1280×720 / 704×576 / 640×480 / 352×288(1~25fps) |
| Bitrate Control            | VBR / CBR                                                                                                                                                    |
| Quality Control            | Five levels under VBR; Freely adjustable under CBR                                                                                                           |
| Image Setting              | Flip, Mirror, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc.                                                                      |

| Audio                   |                                                                                                                                                          |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Audio Communication     | Bi-directional audio (2-way)                                                                                                                             |
| Audio Compression       |                                                                                                                                                          |
| Format                  | G.711A/G.711U                                                                                                                                            |
| Audio Bit Rate          | 64Kbps                                                                                                                                                   |
| Operational             |                                                                                                                                                          |
| Day & Night             | IR cut filter with auto switch                                                                                                                           |
| Backlight Compensation  | Yes                                                                                                                                                      |
| Wide Dynamic Range      | True WDR, 128dB                                                                                                                                          |
| IR Distance             | Up to 300M                                                                                                                                               |
| Digital Noise Reduction | 3D DNR                                                                                                                                                   |
| Digital Zoom            | Yes                                                                                                                                                      |
| Defog                   | Active electric heating and air loop                                                                                                                     |
| Corridor Pattern        | None                                                                                                                                                     |
| Flip / Mirror           | Yes                                                                                                                                                      |
| Video Privacy           | Yes                                                                                                                                                      |
| Alarm Triggers          | Motion detection, Intelligent video analytics, Network disconnect, SD card full, SD card error                                                           |
| Edge Storage            | Built-in micro SD card slot, up to 256GB                                                                                                                 |
| Backfilling             | Yes                                                                                                                                                      |
| Smart Features          |                                                                                                                                                          |
| Perimeter Protection    | Line crossing,region Entering/Exiting/Intrusion                                                                                                          |
| Face Detection          | Face detection and face capture                                                                                                                          |
| Road Traffic            | Vehicle detecting and tracking                                                                                                                           |
| Exception Detection     | Scene change, Exception event                                                                                                                            |
| Smart Tracking          | Yes                                                                                                                                                      |
| Network                 |                                                                                                                                                          |
| Network Protocol        | HTTP, HTTPS, IPv4/IPv6, 802.1x, QoS, FTP, SMTP, UPnP, SNMP,DNS, DDNS, NTP, RTSP, RTCP, RTP, TCP/IP, UDP, IGMP, ICMP,DHCP, PPPoE                          |
| Cyber Security          | User authentication (ID and PW), Host authentication (MAC address); HTTPS encryption, IEEE802.1x port-based network access control; IP address filtering |
| Online Connection       | Support simultaneous monitoring for up to 6 users; Support multi-stream real time transmission                                                           |
| Remote Monitoring       | Webviewer browsing, Holis Pro, Holis Lite, ExacqVision, victor                                                                                           |
| API                     | ONVIF, HAPI3, iAPI3                                                                                                                                      |

| Interface             |                                                                                                  |
|-----------------------|--------------------------------------------------------------------------------------------------|
| Network               | RJ45                                                                                             |
| Audio                 | LINE IN x 1, LINE OUT x 1                                                                        |
| Video Output          | None                                                                                             |
| Onboard Storage       | Built-in micro SD/SDHC/SDXC slot                                                                 |
| RS485                 | None                                                                                             |
| Alarm                 | Input x 1, Output x 1                                                                            |
| Hardware Reset        | Yes                                                                                              |
| Environmental         |                                                                                                  |
| Operating Temperature | - 40 °C ~ 65 °C                                                                                  |
| Operating Humidity    | ≤90%                                                                                             |
| Ingress Protection    | IP67                                                                                             |
| Vandal Resistance     | IK10                                                                                             |
| General               |                                                                                                  |
| Power Supply          | DC24V / PoE+                                                                                     |
| Power Consumption     | <24W                                                                                             |
| Dimensions ( mm )     | Φ 197mm × 302mm                                                                                  |
| Material              | Metals                                                                                           |
| Weight                | Approx.3KG                                                                                       |
| Installation          | Wall mounting, Pole mounting,Pendant mounting and Corner mounting(no accessories in the package) |
| Certification         | ROHS,CE,FCC,IP67,IK10                                                                            |
| NDAA Compliant        | Yes                                                                                              |

Dimensions

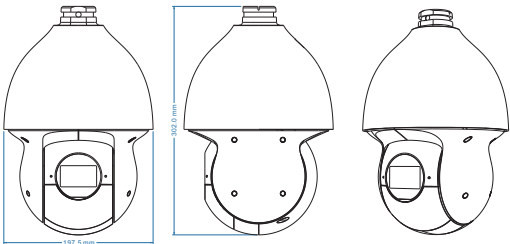

Accessories

|                                       |                                    |                                    |                                      |
|---------------------------------------|------------------------------------|------------------------------------|--------------------------------------|
|                                       |                                    |                                    |                                      |
| ISPTZPD01A                            | ISPTZWM01A                         | ISPTZPMWM02A                       | ISPTZCMWM02A                         |
| Pendant mount for 2MP 25x outdoor PTZ | Wall mount for 2MP 25x outdoor PTZ | Pole mount for 2MP 25x outdoor PTZ | Corner mount for 2MP 25x outdoor PTZ |

Ordering Information

| Model           | Description                                                                                                |
|-----------------|------------------------------------------------------------------------------------------------------------|
| ISV-P02Z252S-NT | H.265 2MP PTZ N/W Camera, 1/2.8” CMOS, 32x Optical Zoom, 300M IR, Micro SD, DC24V/PoE, IP67/IK10, Smart AT |

About Johnson Controls

At Johnson Controls, we transform the environments where people live, work, learn and play. From optimising building performance to improving safety and enhancing comfort, we drive the outcomes that matter most. We deliver our promise in industries such as healthcare, education, data centers, and manufacturing. With a global team of 105,000 experts in more than 150 countries and more than 130 years of innovation, we are the power behind our customers’ mission. Our leading portfolio of building technology and solutions includes some of the most trusted names in the industry, such as Tyco®, York®, Metasys®, Ruskin®, Titus®, Frick®, Penn®, Sabroe®, Simplex®, Ansul® and Grinnell®.

For more information, visit [www.tyco-apac.com](http://www.tyco-apac.com)