

5MP Motorized V/F IR Vandal Proof Dome Smart Network Camera



Key Features

- 5MP resolution (2592 × 1944), H.265
- 30fps@5MP, 60fps@2MP
- True day / night
- Up to 50m IR distance with Smart IR
- Auto focus by motorized V/F lens
- True WDR, up to 120dB
- 3D DNR, HLC & BLC
- Defog
- Triple streams
- Smart codec by ROI
- 2-way audio & alarm in/out
- Onboard storage
- PoE power supply
- Advanced intelligent video analytics
- Face detection / capture
- IP67 / IK10



Specification

Camera				
Imager	1 / 2.7" CMOS			
Effective Pixels	2592 × 1944			
Min. Illumination	0.01 Lux@F1.4,AGC ON; 0 lux with IR			
Shutter Speed	Auto/manual(1 / 3s ~ 1 / 100000s)			
S/N Ratio	≥50dB			
Angle Adjustment	Pan : 0°~345°, Tilt : 0°~77°, Rotation : 0°~345°			
Lens				
Focal Length	2.8 ~ 12 mm @F1.4, Motorized			
Iris Type	DC-Iris			
Field of View	Horizontal: 92.6°~ 28.9°, Vertical: 67.5°~ 21.7°			
Focus Control	auto-focus			
Lens Mount	Φ 14			
DORI Distance				
Lens	Detect	Observe	Recognize	Identify
2.8~12mm(W)	58.19m(190.91ft)	23.28m(76.37ft)	11.64m(38.18ft)	5.82m(19.09ft)
2.8~12mm(T)	202.85m(665.51ft)	81.14m(266.20ft)	40.57m(133.10ft)	20.29m(66.56ft)
Video				
Video Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG			
H.264 Compression Standard	Base Line / Main Profile / High Profile			
H.265 Compression Standard	Main Profile @Leve4.1 High Tier			
Resolution	5MP (2592×1944), 4MP (2592×1520), 2K (2560×1440), 3MP(2304×1296),1080P (1920×1080), 720P (1280×720), D1, CIF, 480×240, VGA(640 × 480)			
Max.Frame Rate	30fps @ all resolution,60fps @ 1080P			
Video Bit Rate	64 Kbps ~ 8 Mbps			
Multiple Streaming	Triple streams			
Main Stream	60Hz:5MP(1~30fps)/4MP(1~30fps)/2K(1~30fps)/3MP(1~30fps)/1080P(1~60fps)/ 720P(1~60fps)			
	50Hz:5MP(1~25fps)/4MP(1~25fps)/2K(1~25fps)/3MP(1~25fps)/1080P(1~50fps)/720P(1~50fps)			


Sub Stream	60Hz:720P/D1/CIF/VGA/480×240 (1~30fps) 50Hz:720P/D1/CIF/VGA/480×240 (1~25fps)
Third Stream	60Hz : D1/480x240/CIF(1 ~ 30fps) 50Hz : D1/480x240/CIF(1 ~ 25fps)
Smart Codec	ROI, 3 zones
Bitrate Control	VBR / CBR
Quality Control	Five levels under VBR; Freely adjustable under CBR
Image Setting	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, NR,etc.
Audio	
Audio Communication	Bi-directional audio (2-way)
Audio Compression Format	G711A/U
Audio Bit Rate	128Kbps
Operational	
Day & Night	IR cut filter with auto switch
Backlight Compensation	Yes
Wide Dynamic Range	True WDR, 120dB
IR Distance	Up to 50M
Digital Noise Reduction	3D DNR
Digital Zoom	Yes
Defog	Yes
Corridor Pattern	Yes
Flip / Mirror	Yes
Video Privacy	4 zones video mask
Intelligent Video Analytics	Perimeter Protection: Line crossing, region Entering/Exiting/Intrusion (human/motor vehicle/non-motor vehicle classification) Target Counting: Line crossing human/motor vehicle/non-motor vehicle counting, heat map Exception Detection: Scene change, video blur and video color cast detection Face Detection: Face detection and face capture Video Metadata: Simultaneously captures human body, motor vehicle and non-motor vehicle
Alarm Triggers	Alarm input, Motion detection, Intelligent video analytics, Network disconnect, SD card error, SD card full, IP address conflict
Edge Storage	Built-in micro SD card slot, up to 256GB
Backfilling	Yes

Network	
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTMP, RTCP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, HTTP POST, 802.1x, UPnP, HTTPS, QoS
Cyber Security	Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Remote Monitoring	Web browser, Holis Pro, Holis Lite, ExacqVision, victor
API	ONVIF, HAPI3, iAPI3
Interface	
Network	RJ45
Audio	Line in × 1, Line out × 1
Video Output	CVBS video output (BNC × 1)
Onboard Storage	Built-in micro SD card slot
RS485	None
Alarm	Alarm in × 1, Alarm out × 1
Hardware Reset	Support
Environmental	
Operating Temperature	- 30 °C ~ 60 °C
Operating Humidity	10 % ~ 90 % relative humidity
Ingress Protection	IP67
Vandal Resistance	IK10
General	
Power Supply	DC12V / PoE
Power Consumption	< 9.5W
Dimensions (mm)	Φ150 × 114
Material	Metals
Weight	≈ 1.05kg
Installation	Wall mounting, Ceiling mounting
Certification	CE, FCC,UL, RoHS, REACH, WEEE
NDAA Compliant	Yes

Dimension

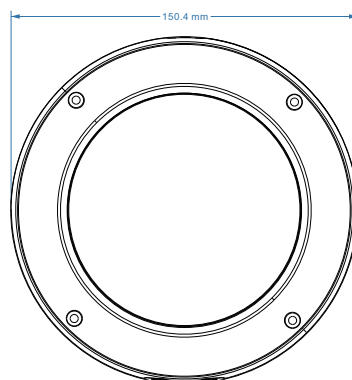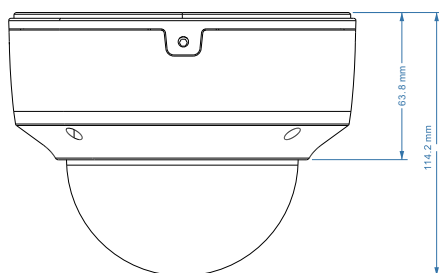

Accessories

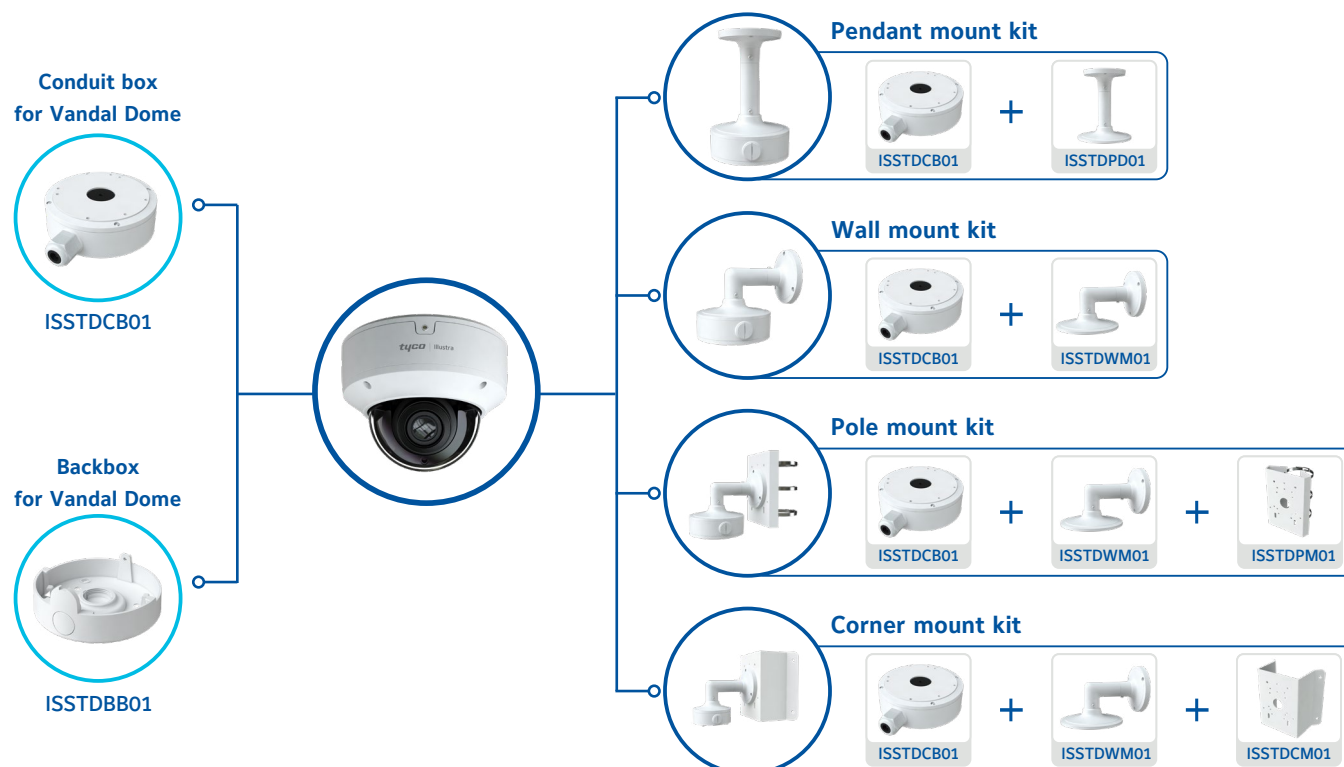

Ordering Information

Module	Description
ISV-V05M023S-N	H.265 5MP Motorized V/F IR Vandal Proof Dome N/W Camera, 2.8–12mm, 50M IR, Micro SD, DC12V/ PoE, IP67/IK10, Smart IVA
ISSTDBB01	Backbox for Vandal Dome
ISSTDCB01	Conduit box for Vandal Dome
ISSTDPM01	Pendant mount for Standard Dome (use with ISSTDCB01)
ISSTDWM01	Wall mount for Standard Dome (use with ISSTDCB01)
ISSTDPM01	Pole mount for Standard Dome (use with ISSTDWM01 & ISSTDCB01)
ISSTDWM01	Corner mount for Standard Dome (use with ISSTDWM01 & ISSTDCB01)

About Johnson Controls

At Johnson Controls, we transform the environments where people live, work, learn and play. From optimising building performance to improving safety and enhancing comfort, we drive the outcomes that matter most. We deliver our promise in industries such as healthcare, education, data centers, and manufacturing. With a global team of 105,000 experts in more than 150 countries and more than 130 years of innovation, we are the power behind our customers' mission. Our leading portfolio of building technology and solutions includes some of the most trusted names in the industry, such as Tyco®, York®, Metasys®, Ruskin®, Titus®, Frick®, Penn®, Sabroe®, Simplex®, Ansul® and Grinnell®.

For more information, visit www.tyco-apac.com