



ICS-A10005 Monitored Double Mini Magnet



Key Features

- Operating voltage 12-24Vdc (Selectable)
- Aluminium housing
- Holding force up to 2 x 600lbs (272Kg)
- Electro-less Nickel Plated Armature
- Fail-Safe
- Suitable For Timber and Metal doors
- CE marked to EMC Directive
- Lock Monitoring

2 x 600lbs/272Kg Electro magnetic locks were designed to meet fire/life safety applications by providing an auxiliary locking mechanism that has no moving parts to bind or wear out for trouble free operation. This will ensure inhibited release at all times where they have become extremely prevalent in applications other than fire/life safety. Suitable for access controlled & secure areas within buildings. Various brackets allow these units to be mounted to both inward and outward opening doors. Low maintenance due to no moving parts.

Specifications

Size

Magnet:	500mm x 48mm x 26mm
Armature Plate:	180mm x 38mm x 11mm
Magnet Without Top Plate:	500mm x 42mm x 26mm
Magnet top Mounting Plate:	500mm x 26mm x 6mm


Technical

Supply Voltage:	12 Or 24VDC selectable
Nominal Voltage:	500mA @ 12VDC 250mA @ 24VDC
Holding Force:	Up to 2 x 600lbs/ 272Kg
Operating Temperature:	-10 ~ 55 C
Weight:	2Kg (approx)
Monitoring:	Clean dry relay contacts. COM-N/O-N/C, Hall Effect
Visible Indicator	LED status indicator

Optional Brackets

ICS-300ZLDC	Z&L kit with covers for inward opening doors
ICS-300CL	L bracket with cover for outward opening doors
ICS-U320M	Surface mounting armature housing

Line Drawing

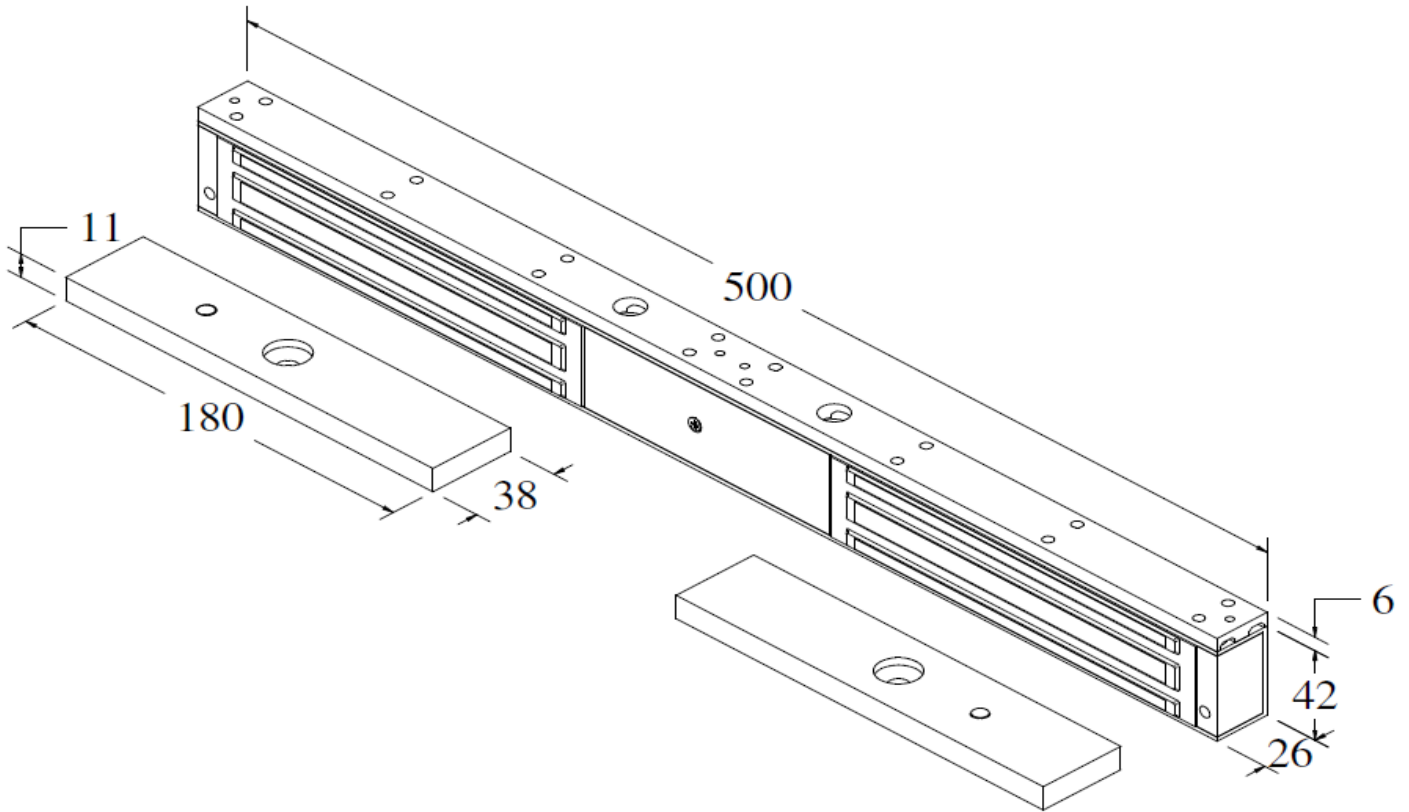

About Johnson Controls

Johnson Controls is a global diversified technology and multi-industrial leader serving a wide range of customers in more than 150 countries. Our 120,000 employees create intelligent buildings, efficient energy solutions, integrated infrastructure and next generation transportation systems that work seamlessly together to deliver on the promise of smart cities and communities. Our commitment to sustainability dates back to our roots in 1885, with the invention of the first electric room thermostat.

For additional information, please visit www.kantech.com or follow us on Twitter, Facebook and LinkedIn.