




ICS-SL500 Mini Shearlock

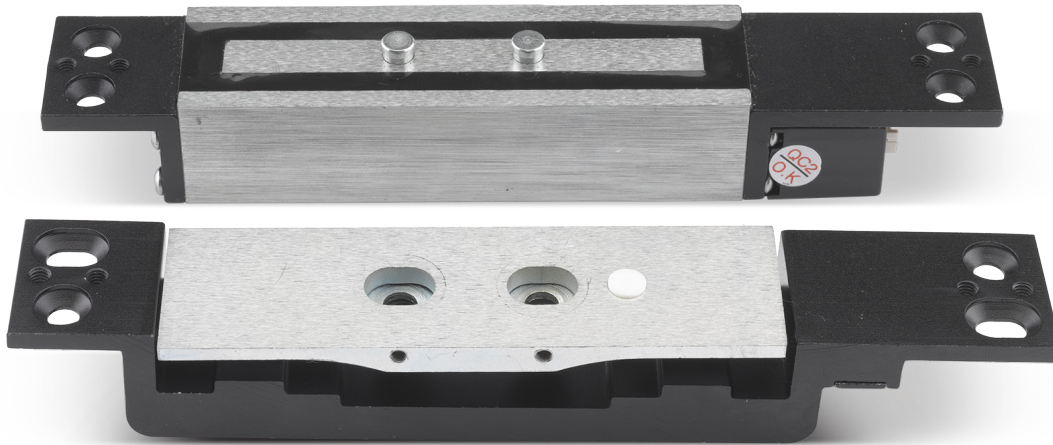

Key Features

- Operating voltage 12~24Vdc (Selectable)
- Holding force up to 2600lbs (1200Kg)
- Fail-Safe
- Suitable For Timber and Metal doors
- CE marked to EMC Directive
- Lock Monitoring
- Adjustable Lock Timer

Shearlocks are designed to fit into the door and frame, giving an aesthetically more pleasing finish. The units also allow for use on both single and double swing doors. This unit also has a built-in feature of a 0.5~25 second delay. Shearlocks give a much higher level holding force, thus increasing the security element. A maximum gap between door and frame should be no more than 4mm. Suitable for use on both timber and metal doors.

Specifications

Size

Magnet:	182mm x 30mm x 24mm
Armature Plate:	182mm x 30mm x 24mm


Technical

Supply Voltage:	12 Or 24VDC selectable
Nominal Voltage:	230mA @ 12VDC 195mA @ 24VDC
Initial Voltage:	900mA
Holding Force:	Up to 2600lbs/ 1200Kg
Operating Temperature:	-5 ~ 50C
Weight:	2.5Kg (approx)
Monitoring:	Clean dry relay contacts. COM-N/O-N/C, Hall Effect

Optional Brackets

ICS-BR500	Surface Mount Housing For ICS-SL500
-----------	-------------------------------------

Line Drawing

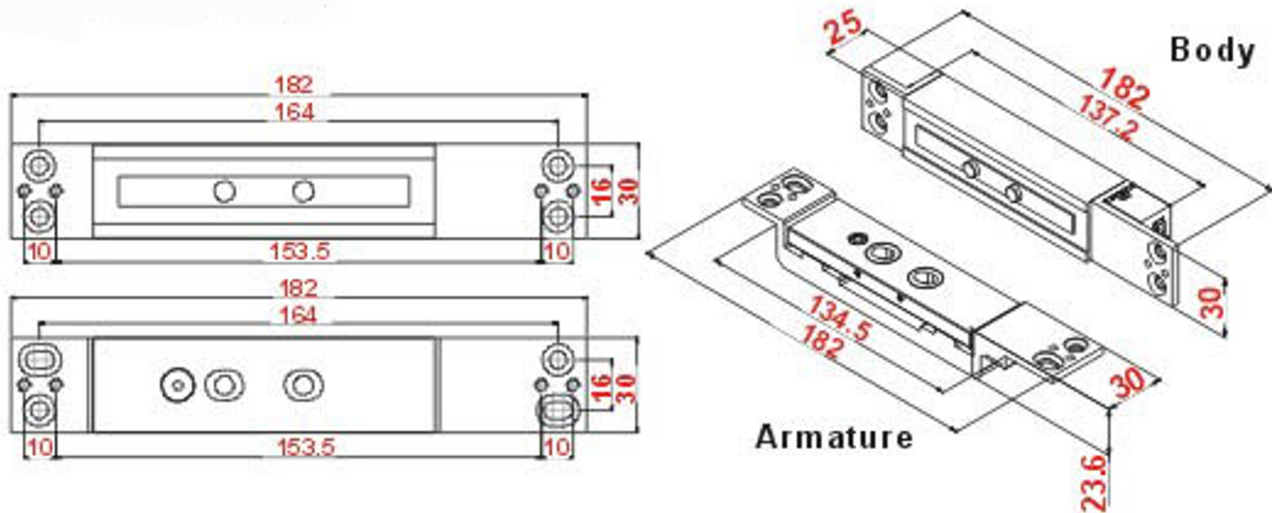

About Johnson Controls

Johnson Controls is a global diversified technology and multi-industrial leader serving a wide range of customers in more than 150 countries. Our 120,000 employees create intelligent buildings, efficient energy solutions, integrated infrastructure and next generation transportation systems that work seamlessly together to deliver on the promise of smart cities and communities. Our commitment to sustainability dates back to our roots in 1885, with the invention of the first electric room thermostat.

For additional information, please visit www.kantech.com or follow us on Twitter, Facebook and LinkedIn.