



# M8 Triple Pole Indoor Call Point Changeover Contact Model



## > Triple Pole Call Points - Benefits


### Simple, Fast, Flexible Installation

- Easy 'Plug & Play' installation
- Choice of operating element – flexi or glass
- Supplied with two function markings as standard

### quality, Performance, Reliability

- Single activation allows signal to three separate circuits
- High grade components maximise operational life
- Operates on 12V and 24V systems, making the range ideal for security applications.
- Suitable for indoor applications only
- Compatible with KAC accessories

### Usage Example

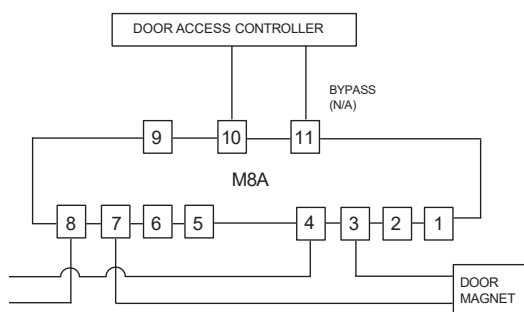

NOTE:EXAMPLE ONLY.  
ALL SWITCHES ARE CHANGE OVER

| > | Device                    | Body/ Case Colour | Mounting Option | Operating Element                     | Function Marking                     | Environmental compliance |
|---|---------------------------|-------------------|-----------------|---------------------------------------|--------------------------------------|--------------------------|
|   | M8 Triple Pole Call Point | Green             | Surface         | Resettable - Plastic Flexible Element | Running Man & Emergency Door Release | RoHS/ WEEE               |
|   |                           |                   |                 | Break Glass Element                   |                                      |                          |

## Triple Pole Call Point – Technical Specification

### Mechanical Specification

|                      |                        |
|----------------------|------------------------|
| Body colour:         | Green, RAL6016         |
| Cable Terminal Size: | 0.5-2.5mm <sup>2</sup> |
| Material:            |                        |
| Body Case            | PC/ABS                 |
| Operating element    | Glass or polycarbonate |
| Gross Weight:        | 186g                   |
| Nett Weight:         | 160 g                  |


### Electrical Specification

|                              |             |
|------------------------------|-------------|
| Operating Voltage:           | 12 to 30VDC |
| Average current consumption: | 2A max      |

### Environmental Specification

|                                                                                        |                         |
|----------------------------------------------------------------------------------------|-------------------------|
| Operating Temperature:                                                                 | -10°C to 55°C           |
| Relative Humidity:                                                                     | 93% ±3% non condensing  |
| Ingress Protection:                                                                    | IP24D internal use only |
| For RoHS, WEEE information please see <a href="http://www.kac.co.uk">www.kac.co.uk</a> |                         |

### Dimensions

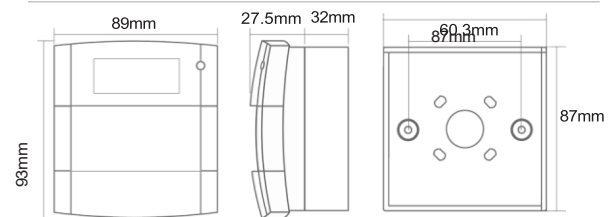

### Out of Box Contents

| Triple Pole Call Point                     | Picture |
|--------------------------------------------|---------|
| Triple Pole Call Point, including back box |         |
| Function Marking (quantity x 2)            |         |
| Installation Pack (quantity x 1)           |         |
| Installation data sheet                    |         |

### Accessories:

| Model                      | Part Number                                      | Picture |
|----------------------------|--------------------------------------------------|---------|
| Pack of 10 Test Keys       | SC070                                            |         |
| Pack of 5 glass elements   | KG1 X 5 (also available in packs of 10, 25 & 50) |         |
| Flexible Operating Element | PS210                                            |         |
| Plain Hinged Cover         | PS200                                            |         |
| SC071                      | Pack of 20 Terminal Blocks                       |         |

### Order Information:

| Code | Body / Case Colour | Mounting Option | Operating Element | Example Part No. |
|------|--------------------|-----------------|-------------------|------------------|
| M8A  | G=Green            | S= Surface      | F=Flexible        | M8A-G000SF       |
|      |                    |                 | G=Glass           | M8A-G000SG       |