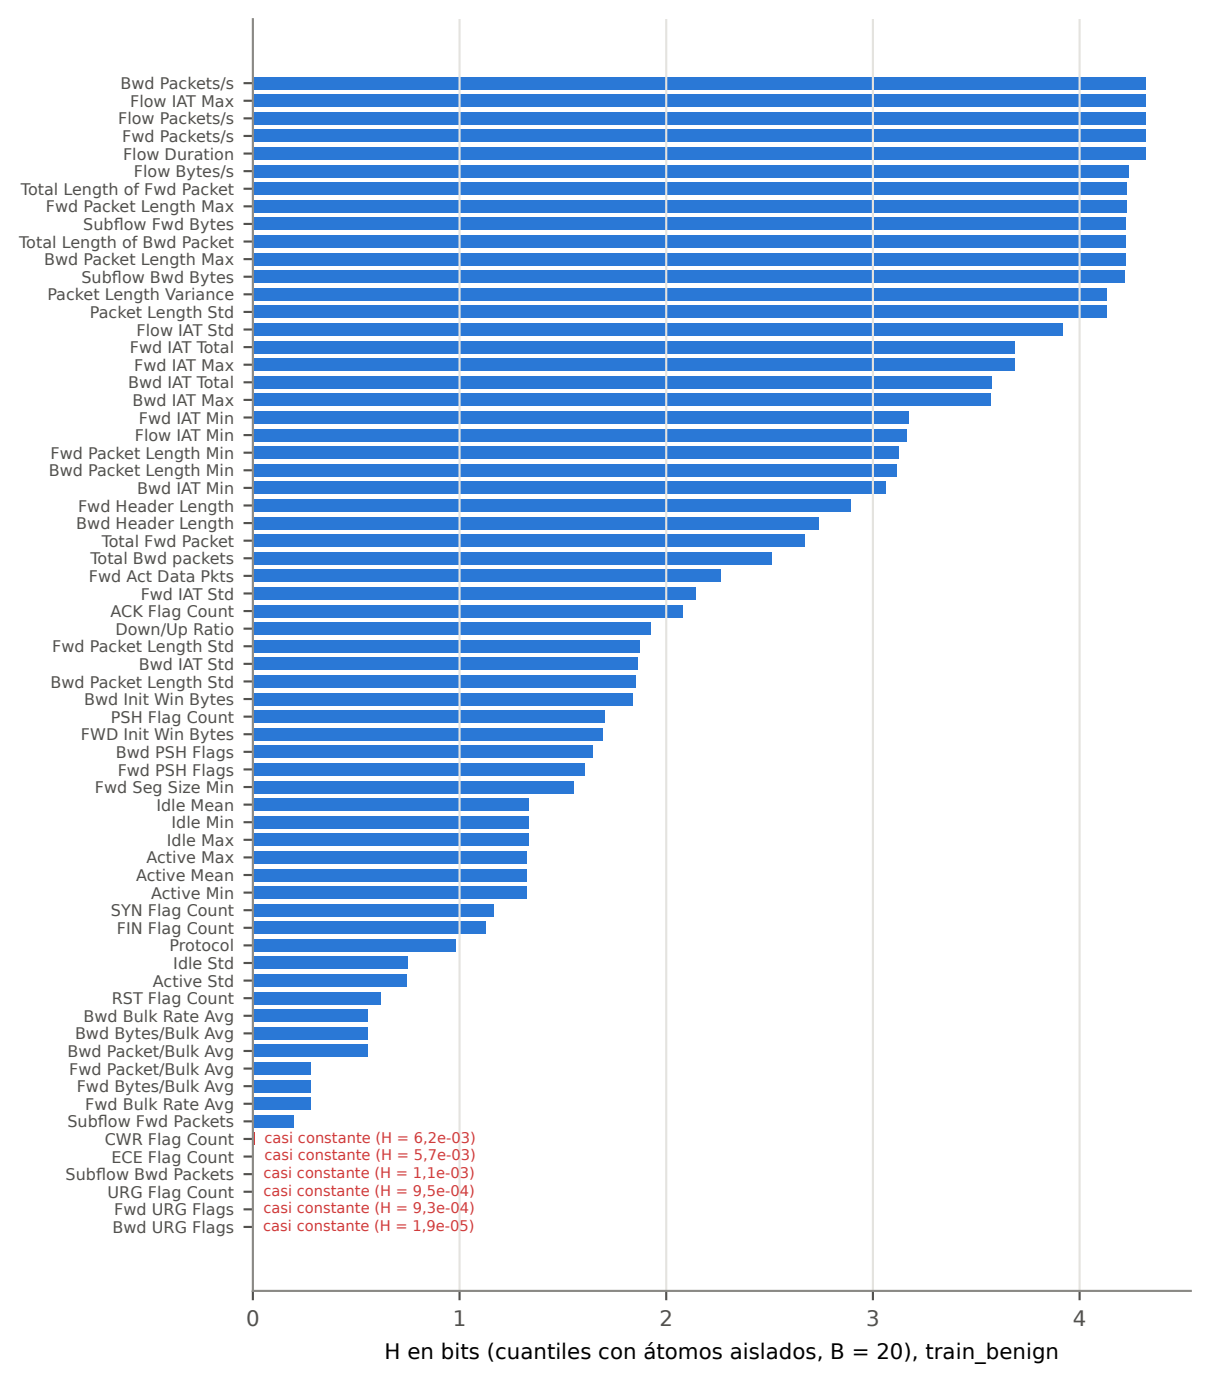
Bwd Packets/s
Flow IAT Max
Flow Packets/s
Fwd Packets/s
Flow Duration
Flow Bytes/s
Total Length of Fwd Packet
Fwd Packet Length Max
Subflow Fwd Bytes
Total Length of Bwd Packet
Bwd Packet Length Max
Subflow Bwd Bytes
Packet Length Variance
Packet Length Std
Flow IAT Std
Fwd IAT Total
Fwd IAT Max
Bwd IAT Total
Bwd IAT Max
Fwd IAT Min
Flow IAT Min
Fwd Packet Length Min
Bwd Packet Length Min
Bwd IAT Min
Fwd Header Length
Bwd Header Length
Total Fwd Packet
Total Bwd packets
Fwd Act Data Pkts
Fwd IAT Std
ACK Flag Count
Down/Up Ratio
Fwd Packet Length Std
Bwd IAT Std
Bwd Packet Length Std
Bwd Init Win Bytes
PSH Flag Count
FWD Init Win Bytes
Bwd PSH Flags
Fwd PSH Flags
Fwd Seg Size Min
Idle Mean
Idle Min
Idle Max
Active Max
Active Mean
Active Min
SYN Flag Count
FIN Flag Count
Protocol
Idle Std
Active Std
RST Flag Count
Bwd Bulk Rate Avg
Bwd Bytes/Bulk Avg
Bwd Packet/Bulk Avg
Fwd Packet/Bulk Avg
Fwd Bytes/Bulk Avg
Fwd Bulk Rate Avg
Subflow Fwd Packets
CWR Flag Count
ECE Flag Count
Subflow Bwd Packets
URG Flag Count
Fwd URG Flags
Bwd URG Flags
casi constante (H = 6,2e-03)
casi constante (H = 5,7e-03)
casi constante (H = 1,1e-03)
casi constante (H = 9,5e-04)
casi constante (H = 9,3e-04)
casi constante (H = 1,9e-05)
0
1
2
3
4
H en bits (cuantiles con átomos aislados, B = 20), train_benign