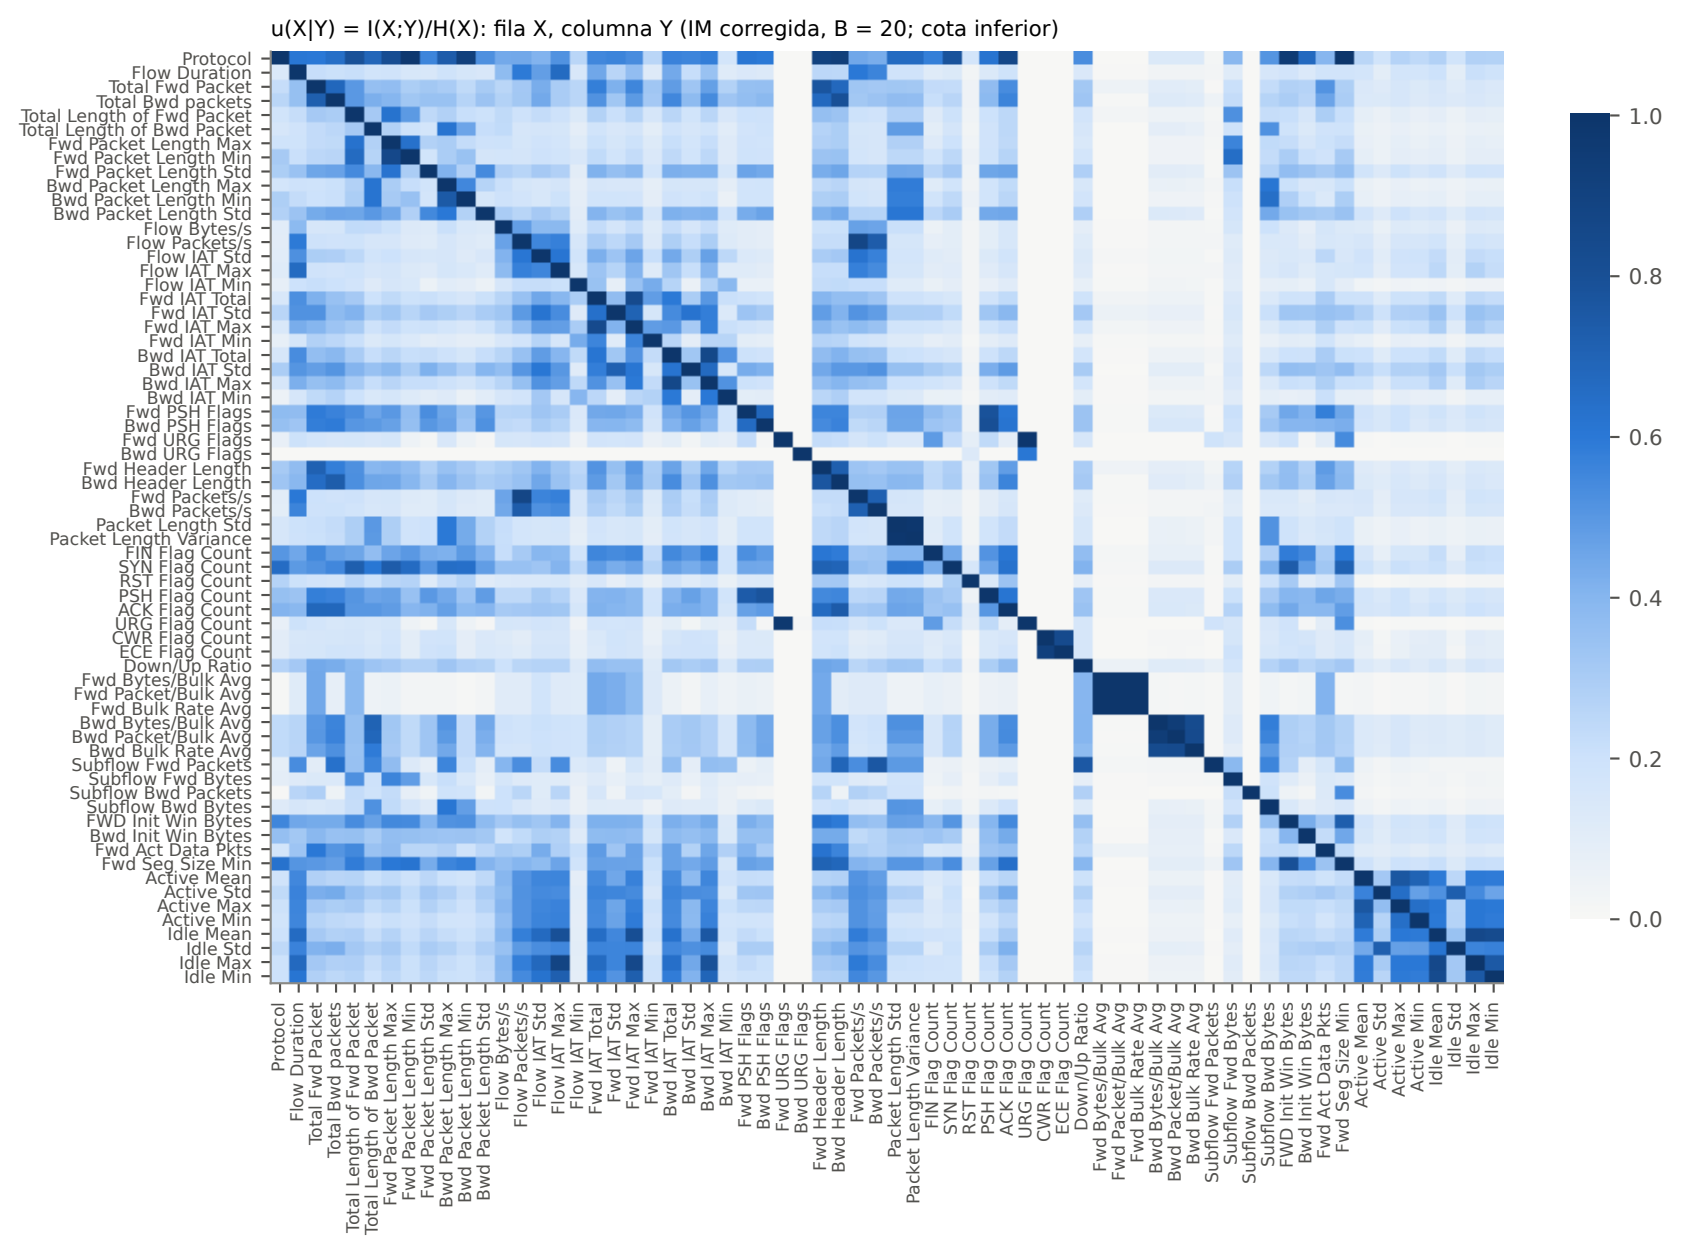
u(X|Y) = I(X;Y)/H(X): fila X, columna Y (IM corregida, B = 20; cota inferior)
Protocol
Flow Duration
Total Fwd Packet
Total Bwd packets
Total Length of Fwd Packet
Total Length of Bwd Packet
Fwd Packet Length Max
Fwd Packet Length Min
Fwd Packet Length Std
Bwd Packet Length Max
Bwd Packet Length Min
Bwd Packet Length Std
Flow Bytes/s
Flow Packets/s
Flow IAT Std
Flow IAT Max
Flow IAT Min
Fwd IAT Total
Fwd IAT Std
Fwd IAT Max
Fwd IAT Min
Bwd IAT Total
Bwd IAT Std
Bwd IAT Max
Bwd IAT Min
Fwd PSH Flags
Bwd PSH Flags
Fwd URG Flags
Bwd URG Flags
Fwd Header Length
Bwd Header Length
Fwd Packets/s
Bwd Packets/s
Packet Length Std
Packet Length Variance
FIN Flag Count
SYN Flag Count
RST Flag Count
PSH Flag Count
ACK Flag Count
URG Flag Count
CWR Flag Count
ECE Flag Count
Down/Up Ratio
Fwd Bytes/Bulk Avg
Fwd Packet/Bulk Avg
Fwd Bulk Rate Avg
Bwd Bytes/Bulk Avg
Bwd Packet/Bulk Avg
Bwd Bulk Rate Avg
Subflow Fwd Packets
Subflow Fwd Bytes
Subflow Bwd Packets
Subflow Bwd Bytes
FWD Init Win Bytes
Bwd Init Win Bytes
Fwd Act Data Pkts
Fwd Seg Size Min
Active Mean
Active Std
Active Max
Active Min
Idle Mean
Idle Std
Idle Max
Idle Min
1.0
0.8
0.6
0.4
0.2
0.0