X2 : PIN ASSIGNMENT [FRITS4102R20-29PB0G1F6]



PIN NO.	CBL NO.	CBL SIZE	REMARK
A	84B10	16	FORWARD+
B	84B13	16	ALL DOOR CLOSED+
C	–	–	–
D	39B10-2	16	CAB KEY ON+
E	38G55-12	16	KEY GND
F	39B11-1	16	CONDUCT KEY ON+
G	–	–	–
H	5825/2	16, 2C	ODOMETER-
J	5825/1	16, 2C	ODOMETER+
K	–	–	–
L			EMB VCC(24V)
M			EMB VCC GND
N	84B11	16	REVERSE+
P	38G93-6	16	GND
R	–	–	–
S	84B12	16	UNCOUPLE+
T	–	–	–

X1 : PIN ASSIGNMENT [FRITS4102R16S-1PB0G1F6]



PIN NO.	CBL NO.	CBL SIZE	REMARK
A	38B93-1	16	POWER-VCC
B	–	–	SPARE
C	–	–	ADD1
D	–	–	ADD2
E	38G93-1	16	POWER-GND
F	–	–	ADD-GND

X3 : PIN ASSIGNMENT [FRITS4102R14S-07PB0G1F6]

*NOTE 12

PIN NO.	CBL NO.	CBL SIZE	REMARK
A	9401-1/1,9401-2/1	20	N1+
B	9401-1/2,9401-2/2	20	N1-
C	9401-1/S,9401-2/S	20	N1 SHIELD
D	–	–	–
E	–	–	–
F	–	–	–
G	–	–	–

X6/X7 : PIN ASSIGNMENT [BNC CONNECTOR]

* X6 CONNECTOR

PIN NO.	PIN	REMARK
CENTER	VIDEO OUT	MAKER SUPPLY
SHIELD	GND	

* X7 CONNECTOR

PIN NO.	PIN	REMARK
CENTER	VIDEO IN	MAKER SUPPLY
SHIELD	GND	

X4 : PIN ASSIGNMENT [MSG59RR-L111]

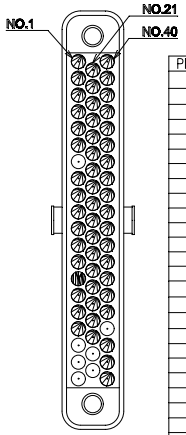

PIN NO.	CBL NO.	CBL SIZE	REMARK	PIN NO.	CBL NO.	CBL SIZE	REMARK
1	8204/1	16, 2C	PA AUDIO TL1+	31	8213/1	16, 3C	PA CONTORDI1 TL2
2	8204/2	16, 2C	PA AUDIO TL1-	32	8213/2	16, 3C	PA CONTORDI2 TL2
3	8204/S	16, 2C	PA AUDIO TL1 SH	33	8213/3	16, 3C	PA CONTORDI3 TL2
4	8214/1	16, 2C	PA AUDIO TL2+	34	8213/S	16, 3C	PA CONTORDI SH TL2
5	8214/2	16, 2C	PA AUDIO TL2-	35	8402/1	16, 2C	PA AUDIO+
6	8214/S	16, 2C	PA AUDIO TL2 SH	36	8402/2	16, 2C	PA AUDIO-
7	–		SPARE	37	8402/S	16, 2C	PA AUDIO SH
8	8201/1	16, 4C	PEI AUDIO TL1 RX+	38	–	–	–
9	8201/2	16, 4C	PEI AUDIO TL1 RX-	39	–	–	–
10	8201/S	16, 4C	PEI AUDIO TL1 SH	40	8401/1	16, 4C	PEI AUDIO RX+
11	8201/3	16, 4C	PEI AUDIO TL1 TX+	41	8401/2	16, 4C	PEI AUDIO RX-
12	8201/4	16, 4C	PEI AUDIO TL1 TX-	42	8401/S	16, 4C	PEI AUDIO SH
13	8211/1	16, 4C	PEI AUDIO TL2 RX+	43	8401/3	16, 4C	PEI AUDIO TX+
14	8211/2	16, 4C	PEI AUDIO TL2 RX-	44	8401/4	16, 4C	PEI AUDIO TX-
15	8211/S	16, 4C	PEI AUDIO TL2 SH	45	8404/1	16, 2C	DUAL TONE+
16	8211/3	16, 4C	PEI AUDIO TL2 TX+	46	8404/2	16, 2C	DUAL TONE-
17	8211/4	16, 4C	PEI AUDIO TL2 TX-	47	8404/S	16, 2C	DUAL TONE SH
18	–	–	SPARE	48	8490/1	16, 2C	ANSN+
19	–	–	SPARE	49	8490/2	16, 2C	ANSN-
20	–	–	SPARE	50	8404/S	16, 2C	ANSN SH
21	8202/1	16, 2C	DUAL TONE TL1+	51	8410/1	16, 4C	OCC AUDIO RX+
22	8202/2	16, 2C	DUAL TONE TL1-	52	8410/2	16, 4C	OCC AUDIO RX-
23	8202/S	16, 2C	DUAL TONE TL1 SH	53	8410/S	16, 4C	OCC AUDIO SH
24	8212/1	16, 2C	DUAL TONE TL2+	54	8410/3	16, 4C	OCC AUDIO TX+
25	8212/2	16, 2C	DUAL TONE TL2-	55	8410/4	16, 4C	OCC AUDIO TX-
26	8212/S	16, 2C	DUAL TONE TL2 SH	56			
27	8203/1	16, 3C	PA CONTORDI1 TL1	57			EMB MIC+
28	8203/2	16, 3C	PA CONTORDI2 TL1	58			EMB MIC-
29	8203/3	16, 3C	PA CONTORDI3 TL1	59			EMB SHIELD
30	8203/S	16, 3C	PA CONTORDI SH TL1		–	–	–

X9 : PIN ASSIGNMENT [801-010-07M7-25PA]



PIN NO.	PIN	REMARK
1	RX+	MAKER SUPPLY
2	RX-	
3	TX+	
4	TX-	
5	GND	

X10 : PIN ASSIGNMENT [801-010-07M7-25PB]



PIN NO.	PIN	REMARK
1	RX+	MAKER SUPPLY (SPARE)
2	RX-	
3	TX+	
4	TX-	
5	GND	

X11 : PIN ASSIGNMENT [801-010-07M7-25PC]

PIN NO.	PIN	REMARK
1	RX+	MAKER SUPPLY (SPARE)
2	RX-	
3	TX+	
4	TX-	
5	GND	

NOTE :

1. FABRICATEE HARNESS ASSEMBLY IN ACCORDANCE WITH REDE114797
   - SECTION. 16. MATERIAL AND WORKMANSHIP OF RTD CONCESSION AGREEMENT ATTACHMENT 7 . PART C
2. CONNECTION FOR EARTHING CABLE SHOULD BE FOLLOWED WITH REW000121CTO (CHASSY EARTHING DRAWING).
3. IF IT NEEDS A WIRING CONNECTION AT STUD TYPE TERMINAL SERIES, RING TERMINAL AND TERMINAL LUG SHOULD BE USED.
   RING TERMINAL AND TERMINAL LUG SHALL BE USED WITH BEING APPROVED (REFER TO DWG. REW000123CTO).
4. CP PART NUMBER IS INCORPORATED WITH Dwg No. CP710007
5. CRIMPING APPLICATION TOOL IS FOLLOWED WITH T&B VENDOR'S RECOMMENDATION.
6. DETAIL INFORMATION OF MAKER CABLES SUPPLIED BY EACH SUB-SYSTEM IS PROVIDED AT DWG NO.REW000122CTO
7. UNLESS OTHERWISE MENTIONED AT PIN ASSIGNMENT DWG, USING BUTT SPLICE IS NOT ALLOWED
8. IF IT NEEDS A WIRING CONNECTION AT WAGO SERIES CONNECTOR OR CAGE CLAMP TYPE TERMINAL BLOCK, FERRULES SHOULD BE USED.
9. DESIGNATION SLEEVE AT EACH END OF WIRE SHOULD BE SHRINKED
10. EMPTY HOLE OF CONNECTOR MUST BE PLUGGED WITH ACTUAL PIN FOR PRIMARY FUNCTION.
11. ALL OF THE CONNECTOR ACCESSORY MUST BE APPLIED WITH GROMMET, GASKET, BACKSHELL, CLAMP AND RUBBER TUBE.
12. BOTH WIRE SHOULD BE JOINED WITH BUTT SPLICE AND THEN CONNECT TO PROPER PIN WITH USING LEAD WIRE.

기호 MARK	일자 DATE	변경내역 DETAIL OF REVISION(E.C ZONE)	설변번호 E.C NO.	설계 DGN	검도 CHK	승인 APP

품번 NO.	부품번호 PART NO.	품명 DESCRIPTION	재질 MATERIAL	수량 QTY	중량 W.T	비고 REMARKS

승인 APP	D.I.KIM 2012.05.20	재질 MAT'L NA	명칭 TITLE: PIN ARRANGEMENT,COMM.RACK(1/2)
검도 CHK	H.S.PARK 2012.05.20	총중량 G.W NA	
설계 DGN	J.H.KIM 2012.05.20	일반공차 MC WD CT	도면번호 DRG. NO: REW00084CT0 MS Ver. 00 Rev. ---
제도 DRG		SIZE C	SCALE: 매수 SHEET 1 of 2
		참고번호 REF. NO.	HYUNDAI Rotem 현대로템주식회사

RNE1002

년--PRJT

정리번호

일반공차			
길이 LENGTH	~ 40	2	4
	~ 30	2	3
	~ 10	1	1.5
	<3	0.5	1
각도 ANGLE	~2650	–	7
	~1600	4	5
	~ 800	3	4
	~ 400	2	3
	~ 200	1.5	2
	~ 100	1	1.5
등급 GRADE		A	B

구멍 공차용 GAGING (?)			
~ 20M	8	14	0.6
~ 16M	7	12	21
~ 10M	6	10	18
~ 8M	5	8	14
~ 4M	4	6	11
~ 2M	3	4	8
~ 1M	2	3	6
~ 315	1	2	4
~ 100	1	2	3
~ 30	1	1	1
등급 GRADE	A	B	C

구멍 공차용 MEDDING (?)			
~ 20M	–	6.0	8.0
~ 16M	–	5.0	7.0
~ 10M	–	4.0	6.0
~ 8M	–	3.0	5.0
~ 4M	0.8	2.0	4.0
~ 2M	0.5	1.2	3.0
~ 1M	0.3	0.8	2.0
~ 315	0.2	0.5	1.2
~ 100	0.15	0.3	0.8
~ 30	0.1	0.2	0.5
3 ~ 6	0.05	0.1	0.2
등급 GRADE	A	B	C

구멍 공차용 MACHINING (?)
구멍공차없는 일반공차표 GENERAL TOLERANCE

본 도면은 당사 재산으로서 허가없이 무단복사/배포 금지함. PROPERTY OF ISSUING ENTITY. CANNOT BE DISTRIBUTED OR REPRODUCED WITHOUT AUTHORIZATION.

AutoCAD