X15 : PIN ASSIGNMENT
[FRITS4102R14S-07PB0G1F6]



PIN NO.	PIN	REMARK
A	TD	MAKER SUPPLY
B	RD	
C	SHIELD	
D	SPARE	
E	DC +5V OUT	
F	DC GND OUT	
F	SPARE	

X16 : PIN ASSIGNMENT
[801-009-07M9-210PA]



PIN NO.	CBL NO.	CBL SIZE	REMARK
A	8206/1	16, 2C	TX1+
B	8206/2	16, 2C	TX1-
C	8206/S	16, 2C	TX1 SH
D	-	-	SPARE
E	8205/1	20, 2C	RS485 TL1+
F	8205/2	20, 2C	RS485 TL1-
G	8205/S	20, 2C	RS485 TL1 SH
H	8215/1	20, 2C	RS485 TL2+
J	8215/2	20, 2C	RS485 TL2-
K	8215/S	20, 2C	RS485 TL2 SH
L			
M			
N			
P			
R			
S			
T			

X5 : PIN ASSIGNMENT
[MSG59RR-L111]

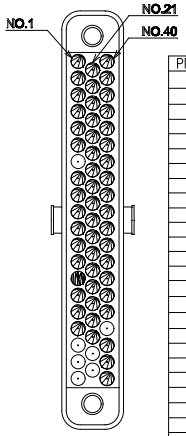

PIN NO.	CBL NO.	CBL SIZE	REMARK	PIN NO.	CBL NO.	CBL SIZE	REMARK
1	84L09	16	PEI LIVE-ADD GND	31	-	-	
2	84L01	16	PEI1 LIVE-ADD	32	-	-	
3	84L02	16	PEI2 LIVE-ADD	33	-	-	
4	84L03	16	PEI3 LIVE-ADD	34	-	-	
5	84L04	16	PEI4 LIVE-ADD	35	-	-	
6	84L05	16	PEI5 LIVE-ADD	36	-	-	
7	84L06	16	PEI6 LIVE-ADD	37	-	-	
8	84L07	16	PEI7 LIVE-ADD	38	-	-	
9	84L08	16	PEI8 LIVE-ADD	39	-	-	
10	-	-		40	-	-	
11	84L30	16	DPO LIVE-ADD1	41	-	-	
12	84L31	16	DPO LIVE-ADD2	42	-	-	
13	84L32	16	DPO LIVE-ADD GND	43	-	-	
14	-	-		44	-	-	
15	84L38	16	DPH LIVE-ADD1	45	8441/S	16, 2C	AUDIO1 SH
16	84L39	16	DPH LIVE-ADD2	46	8441/1	16, 2C	AUDIO1+
17	84L40	16	DPH LIVE-ADD GND	47	8441/2	16, 2C	AUDIO1-
18	-	-		48	8445/S	16, 2C	AUDIO2 SH
19	-	-	A	49	8445/1	16, 2C	AUDIO2+
20	-	-	B	50	8445/2	16, 2C	AUDIO2-
21	-	-	C	51	8451/S	16, 2C	AUDIO3 SH
22	-	-	D	52	8451/1	16, 2C	AUDIO3+
23	-	-	E	53	8451/2	16, 2C	AUDIO3-
24	-	-	F	54	8453/S	16, 2C	AUDIO4 SH
25	-	-	-	55	8453/1	16, 2C	AUDIO4+
26	-	-	-	56	8453/2	16, 2C	AUDIO4-
27	-	-	-	57	8440/S	16, 2C	AUDIO5 SH
28	-	-	-	58	8440/1	16, 2C	AUDIO5+
29	-	-	-	59	8440/2	16, 2C	AUDIO5-
30	-	-	-				

NOTE :

1. FABRICATE HARNESS ASSEMBLY IN ACCORDANCE WITH REDE114797
   - SECTION. 16. MATERIAL AND WORKMANSHIP OF RTD CONCESSION AGREEMENT ATTACHMENT 7 . PART C
2. CONNECTION FOR EARTHING CABLE SHOULD BE FOLLOWED WITH REW000121CT0 (CHASSIS EARTHING DRAWING).
3. IF IT NEEDS A WIRING CONNECTION AT STUD TYPE TERMINAL SERIES, RING TERMINAL AND TERMINAL LUG SHOULD BE USED.
   RING TERMINAL AND TERMINAL LUG SHALL BE USED WITH BEING APPROVED (REFER TO DWG. REW000123CT0).
4. CP PART NUMBER IS INCORPORATED WITH Dwg No. CP710007
5. CRIMPING APPLICATION TOOL IS FOLLOWED WITH T&B VENDOR'S RECOMMENDATION.
6. DETAIL INFORMATION OF MAKER CABLES SUPPLIED BY EACH SUB-SYSTEM IS PROVIDED AT DWG NO.REW000122CT0
7. UNLESS OTHERWISE MENTIONED AT PIN ASSIGNMENT DWG, USING BUTT SPLICE IS NOT ALLOWED
8. IF IT NEEDS A WIRING CONNECTION AT WAGO SERIES CONNECTOR OR CAGE CLAMP TYPE TERMINAL BLOCK, FERRULES SHOULD BE USED.
9. DESIGNATION SLEEVE AT EACH END OF WIRE SHOULD BE SHRINKED
10. EMPTY HOLE OF CONNECTOR MUST BE PLUGGED WITH ACTUAL PIN FOR PRIMARY FUNCTION.
11. ALL OF THE CONNECTOR ACCESSORY MUST BE APPLIED WITH GROMMET, GASKET, BACKSHELL, CLAMP AND RUBBER TUBE.

기호 MARK	일자 DATE	변경내역 DETAIL OF REVISION(E.C ZONE)	설변번호 E.C NO.	설계 DGN	검도 CHK	승인 APP
X1	2012.08.31	CHANGED CN X16 PIN NO	RNE1002-U157	J.H.JONG	H.S.PARK	D.I.KIM

품번 NO.	부품 번호 PART NO.	품 명 DESCRIPTION	재질 MATERIAL	수량 QTY	중량 W.T	비 고 REMARKS

승인 APP	D.I.KIM 2012.05.20	재질 MAT'L NA	명 칭 TITLE: PIN ARRANGEMENT,COMM.RACK(2/2)
검도 CHK	H.S.PARK 2012.05.20	총중량 G.W NA	
설계 DGN	J.H.KIM 2012.05.20	일반공차 MC WD CT	도면 번호 DRG. NO: REW00084CT0 Ver. 00 Rev. -A
제도 DRG		SIZE C	SCALE MS 매수 SHEET 2 of 2
		참고번호 REF. NO.	HYUNDAI Rotem 현대로템주식회사

RNE1002 년-PRJT 정리번호

일반공차 GENERAL TOLERANCE			
치수 DIMENSION	~ 40	2	4
	~ 30	2	3
	~ 10	1	1.5
	<3	0.5	1
각도 ANGLE	~2050	-	7
	~1600	4	5
	~ 800	3	4
	~ 400	2	3
	~ 200	1.5	2
	~ 100	1	1.5
등급 GRADE		A	B

주조 공차 CASTING (?)			
~ 20M	8	14	0.4
~ 15M	7	12	21
~ 10M	6	10	18
~ 8M	5	8	14
~ 4M	4	6	11
~ 2M	3	4	8
~ 1M	2	3	6
~ 315	1	2	4
~ 100	1	2	3
~ 30	1	1	1
등급 GRADE	A	B	C

단조 공차 FORGING (?)			
~ 20M	-	6.0	8.0
~ 10M	-	5.0	7.0
~ 12M	-	4.0	6.0
~ 6M	-	3.0	5.0
~ 4M	0.8	2.0	4.0
~ 2M	0.5	1.2	3.0
~ 1M	0.3	0.8	2.0
~ 315	0.2	0.5	1.2
~ 100	0.15	0.3	0.8
~ 30	0.1	0.2	0.5
3 ~ 6	0.05	0.1	0.2
등급 GRADE	A	B	C

기계 가공공차 MACHINING (?)
가공치수공차 표준공차표 GENERAL TOLERANCE

본 도면은 당사 재산으로서 허가없이 무단복사/배포 금지함. PROPERTY OF ISSUING ENTITY. CANNOT BE DISTRIBUTED OR REPRODUCED WITHOUT AUTHORIZATION.

AutoCAD