품번 GROUP NO.					품번 ITEM	품 명 DESCRIPTION	사 양 SPEC	도면번호 DWG NO.	-	품번 및 관련	중량. 길이 폭 x 길이	표면처리 S/TREATMENT
				1	ITEM	DESCRIPTION	SPEC	DWG NO.				S/TREATMENT
				2	1	36P PLUG(RUBBER COUPLING)	FRIT84105RGG36-36S80PG36FS/NEXUS					
				2	2	ADAPTER-PG36	M69SM36P36					
				1	3	CONDUIT TUBE	RLTPC36B,PA12					
				2	4	GASKET	ASSY,t=1.5					
				2	5	NAME LABEL	304SS,t=0.5(MAX.)					

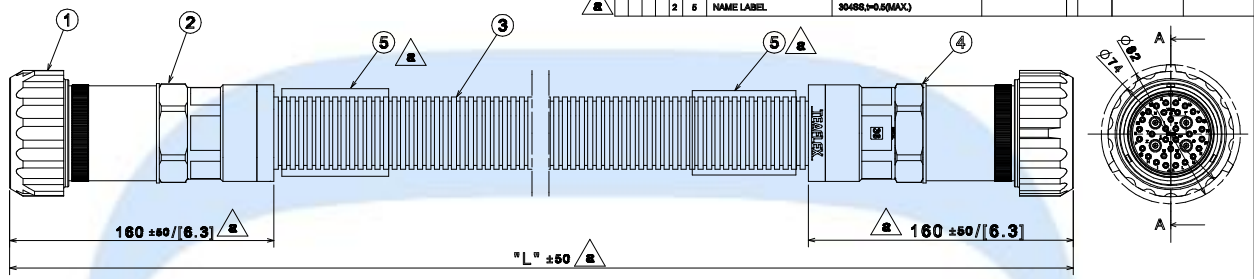

NOTE.
1. KIND OF CONNECTOR
   - Straight plug supplied with PG36 adapter
2. TECHNICAL CHARACTERISTICS
   - Arrangement : 36-35
   - Contacts: 4 size8 coax type contacts for RG59
     32 size 16 pin crimp contacts
   - Working voltage: 700Vdc,500Vac
   - Test voltage: 2,000Vac
   - Current rating: size8 = 73A at 20°C
     size16 = 22A at 20°C
   - Working temperature: (-55~+125)°C
   - IP rating (coupled connector): IP67
3. MATERIAL AND FINISH
   Contacts:
   -copper alloy
   -gold plating
   Inserts:
   -fire-resistant ethylene acrylic rubber
   Metallic parts:
   -aluminium alloy
   -electrodeposition of black paint(F6)
4. WEIGHT : 4.14kg
5. Non-assignment connector sockets/pins should be filled with sealing plug. (Signal pin : 10-305045-16 Coaxial pin : 10-305045-8, GLENAIR)

JUMPER COUPLER PIN ASSIGNMENT

NO.	ITEM	TLG	NO.	ITEM	TLG
A	PEI1 LIVE ADD	64L01	a		
B	PEI2 LIVE ADD	64L02	b		
C	PEI3 LIVE ADD	64L03	c		
D	PEI4 LIVE ADD	64L04	d		
E			e		
F			f	VIDEO OUT	COAXIAL(L)
G			g		
H			h		
I	PEI LIVE ADD GND	64L09	i		
J	DPO LIVE ADD1	64L30	j		
K	DPO LIVE ADD2	64L31	m		
L	DPO LIVE ADD GND	64L38	n		
M					
N					
P					
R					
S					
T	DPH LIVE ADD1	64L39			
U	DPH LIVE ADD2	64L40			
V	DPH LIVE ADD GND	64L40			
W					
X	VIDEO IN	COAXIAL(R)			
Y					
Z					



Section view A-A
Scale: 1:2

DIMENSION	
"L"	APPROX 3,200 +/- 50 [125.98 +/- 1.96]

일반 GENERAL			
치수 DIMENSION	~ 40	2	4
	~ 30	2	3
	~ 10	1	1.5
재질 MATERIAL	< 3	0.5	1
인장강도 TENSILE STRENGTH	~3150	-	7
	~1600	4	5
	~ 800	3	4
	~ 400	2	3
	~ 200	1.5	2
	~ 100	1	1.5

표면 SURFACE	A	B	C
주조 가공표면 CASTING (±)			
~ 25H1	8	14	24
~ 15H	7	12	21
~ 12H	6	10	18
~ 8H	5	8	14
~ 4H	4	6	11
~ 2H	3	4	8
~ 1H	2	3	6
~ 315	1	2	4
~ 120	1	2	3
~ 30	1	1	1

표면 SURFACE	A	B	C
절삭 가공표면 MACHINING (±)			
~ 25H1	-	5.0	8.0
~ 15H	-	5.0	7.0
~ 12H	-	4.0	6.0
~ 8H	-	3.0	5.0
~ 4H	0.8	2.0	4.0
~ 2H	0.5	1.2	3.0
~ 1H	0.3	0.8	2.0
~ 315	0.2	0.5	1.2
~ 120	0.15	0.3	0.8
~ 30	0.1	0.2	0.5
3~5	0.05	0.1	0.2

표면 SURFACE	A	B	C
기계 가공표면 MACHINING (±)			
구멍GENERAL 일반공차표 GENERAL TOLERANCE			

개정 CHANGE			
a	2012.03.15	이재원	Weight is changed. Drawing is updated. Dimension is updated. Name plate is updated. 4-LOCK pin assignment added. Rev.B→C
기호 MARK	일자 DATE	성명 NAME	변경내용 DESCRIPTION

CHANGE TO USE (FOR CLASS)

| | | | | |