CORD END TERMINAL

INSULARED TWIN SLEEVES

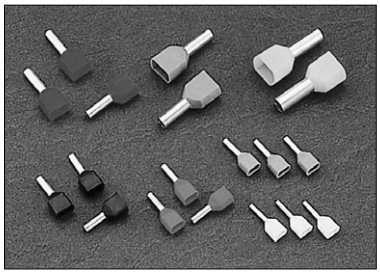

Material : E-Copper, Tinned
Insulation :Polyamid

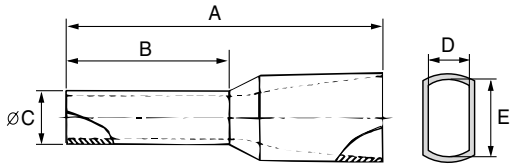

Part No	Conductor(㎟)	Dimension(㎜)					COLOR
		A	B	ØC	D	E	
CT2005008	2 × 0.50	15.0	8.0	1.80	2.00	4.2	WHITE
CT2007508	2 × 0.75	15.0	8.0	2.10	2.30	4.5	GREY
CT2007510		17.0	10.0	2.10	2.30	4.5	
CT2010008	2 × 1.00	15.0	8.0	2.35	2.65	4.8	RED
CT2010010		17.0	10.0	2.35	2.65	4.8	
CT2015008	2 × 1.50	16.0	8.0	2.60	2.90	5.9	BLACK
CT2015012		20.0	12.0	2.60	2.90	5.9	
CT2025010	2 × 2.50	18.5	10.0	3.20	3.40	7.0	BLUE
CT2025013		21.5	13.0	3.20	3.40	7.0	
CT2040012	2 × 4.00	23.0	12.0	4.10	3.40	7.8	GREY
CT2060014	2 × 6.00	26.0	14.0	5.20	3.40	9.0	YELLOW

CRIMPING TOOLS

Part No		Available Wire
DET-04WF		0.5㎟ ~ 4㎟
DET-16WF		6㎟ ~ 16㎟
DET-086/TU		0.08㎟ ~ 6㎟

FUSE HOLDER & TUBE

CONTROL FUSE HOLDER

For Diazed Fuses

Material : Rigid, self-extinguishing and High impact-resistant thermoplastic.
Color : White

Part No	FUSE Capacity	Electric With stand	FUSE
DFH-1P DFH-2P DFH-3P	2A ~30A	AC2000V/ one minute	Diazed Fuse

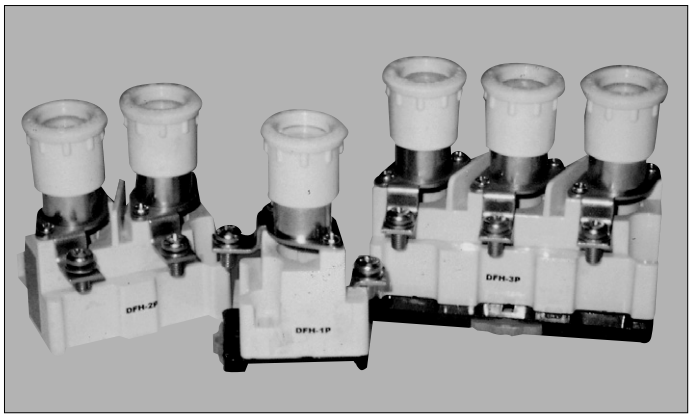



DFH-3P



DFH-2P

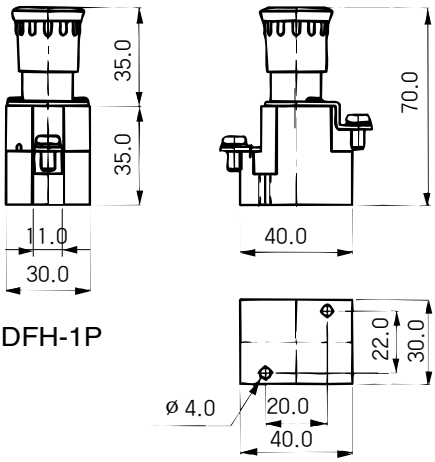

DFH-1P

HOOK TUBE

The main application of HOOK TUBE is Mechnical & thermal protection of conductors, Cable inside control box, Pipe etc...
Easy to install and No need hand tool for installing.
Material : Vinyl Leather or Flamme Retardant Teflon.
High Class Flamme Retardant Sheet can be used in Nuclear Power Station.
Hook-Nylon
Color : Gray

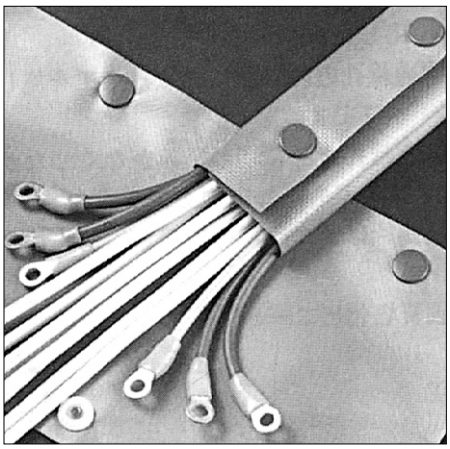

Part No	Tube Size (Ø)	Hook Pitch (mm)	Length (M)
DAHT-20	20.0	75.0	50
DAHT-30	30.0	75.0	50
DAHT-40	40.0	75.0	50
DAHT-50	50.0	75.0	50
DAHT-60	60.0	75.0	50
DAHT-70	70.0	75.0	50

HERICAL BAND & DUCTS

HERICAL BAND (Sprial Wrapping)

Dong-a Herical Band is designed to wrap around bundles of wires to make neat looms and protect the conductors.
Material : P.E.
Color : Natural or Off-White or Black

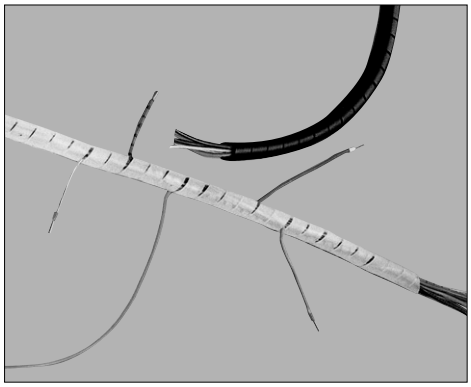

Part No	Dimmen sion (mm)		Q` ty per Pack
	A	B	
DHB-103	8.00	7.80	5M(196.8″)
DHB-104	13.00	12.80	5M(196.8″)
DHB-105	16.00	13.60	5M(196.8″)

PVC DUCTS

Dong-A PVC Ducts are suitable for wall and ceiling mounting and no tools required for cover removal.

For ambient temperatures between : -5° ~60° C
Material : Rigid, insulated, self-extinguishing and impact- resistant thermoplstic.
Max, Service Voltage : 1000V
Color : Gray
Good resistance to aging

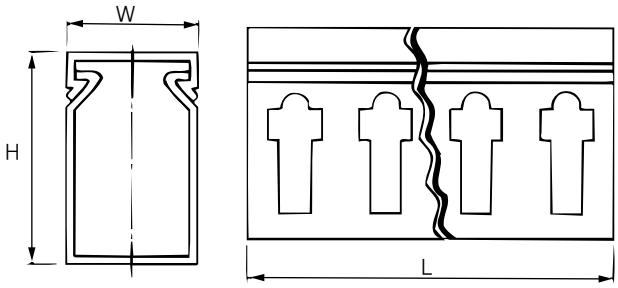
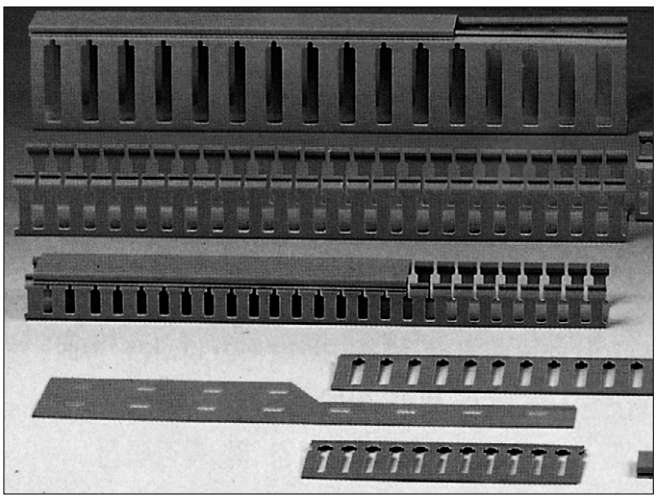
Part No	W(mm)	H(mm)	L(M)
DPD20×30	20	30	2
DPD25×40	25	40	2
DPD25×60	25	60	2
DPD30×40	30	40	2
DPD30×60	30	60	2
DPD40×40	40	40	2
DPD40×60	40	60	2
DPD40×80	40	80	2
DPD40×100	40	100	2
DPD60×60	60	60	2
DPD60×80	60	80	2
DPD80×60	80	60	2
DPD80×80	80	80	2
DPD80×100	80	100	2
DPD100×80	100	80	2
DPD100×100	100	100	2