

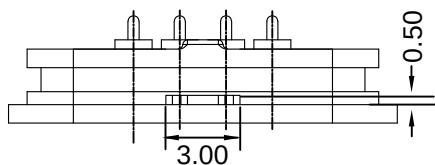



RoHS
Compliant

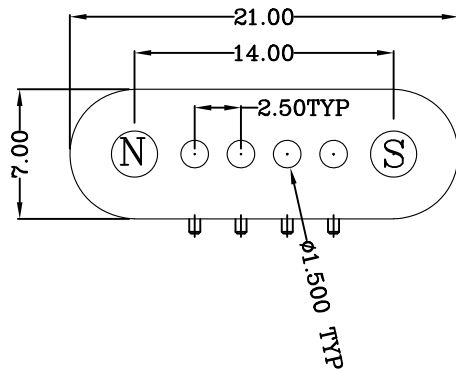

Recommended PCB Layout
(Component Side, Tol. ±0.05)

2		1		
N0	Item Name	Q'ty	Material	Finish
1	Pin	4	Copper Alloy:Brass	Gold over Nickel plating
2	Housing	1	High Temp. Plastics Black	_____
3	Magnet	2	NdFeB	Nickel plating
4				
5				

Notes:

- 1 No deformation,contaimination allowed
- 2 Electrical
 - 2.1 Current rating:2.0A, peak 3A
 - 2.2 Voltage rating:36VDC Max.
 - 2.3 Insulation Resistance: 500Mohm Min. @500VDC
 - 2.4 Dielectric Withstanding Voltage: 500VAC 1 minute
- 3 Environmental
 - 3.1 Operating and Storage temperature: -30°C~+65°C
- 4 RoHS Compliant

GENERAL TOLERANCES (Unless Specified)		SHENZHEN YIWEI TECHNOLOGY CO.,LTD An ISO9001:2015 Certified Company									
.0 ± 0.15		.00 ± 0.10		CUSTOMER DWG	TITLE Magnet Pad Connector 4Pin 2.5Pitch Right Angle						
.000 ± 0.03		Angle ± 2°									
THIS DRAWING IS CONFIDENTIAL AND COPYRIGHT PROPERTY OF ANLINK. NO FURTHER DISCLOSURE PERMITTED TO OTHER COMPANY BY YOU WITHOUT ANLINK WRITTEN AUTHORIZATION				DRAWN: Ivan	2018.10.25	PART NO. MG04254FRA1S1N					
				CHK'D: SH	2018.10.25						
				SIZE		UNIT			SCALE	SHEET	REV
				A4		mm			1:1	1/1	X1

REV.	ECN NO. /CHANGE DESCRIPTION	DATE
X1	Proposal	2018.10.25