

## DH-IPC-HDBW2201R-ZS/VFS

2MP Full HD WDR Water-Proof & Vandal-Proof Network Dome Camera



### Features

- 1/3" 2Megapixel progressive scan Aptina CMOS
- H.264 & MJPEG dual-stream encoding
- 25/30fps@1080P(1920x1080) & 25/30fps@720P(1280x720)
- Day/Night(ICR), 3DNR, AWB, AGC, BLC, WDR(120dB)
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 2.7~12mm varifocal lens
- Max IR LEDs Length 20m
- IP66, IK10, PoE

# DH-IPC-HDBW2201R-ZS/VFS

## Technical Specifications


Model		DH-IPC-HDBW2101R-VFS	DH-IPC-HDBW2101R-ZS
Camera			
Image Sensor		1/3" 2Megapixel progressive scan Aptina CMOS	
Effective Pixels		1920(H)x1080(V)	
Scanning System		Progressive	
Electronic Shutter Speed		Auto/Manual, 1/3(4)~1/10000s	
Min. Illumination		0. 01Lux/F1.4(Color); 0Lux/F1.4(IR on)	
S/N Ratio		More than 50dB	
Video Output		N/A	
Camera Features			
Max. IR LEDs Length		20m	
Day/Night		Auto(ICR)/Color/B/W	
Backlight Compensation		BLC / HLC / WDR	
White Balance		Auto/Manual	
Gain Control		Auto/Manual	
Noise Reduction		3D	
Privacy Masking		Up to 4 areas	
Lens			
Focal Length		2.7mm~12mm	2.7mm~12mm
Max Aperture		F1.4	F1.4
Focus Control		Manual	Auto
Angle of View		H: 82 °~28 °	H: 82 °~28 °
Lens Type		Manual/Fixed Iris	Motorized/Fixed Iris
Mount Type		Board-in Type	Board-in Type
Video			
Compression		H.264/ H.264H/ H.264B/ MJPEG	
Resolution		1080P(1920x1080)/1.3M(1280×960)/720P(1280×720)/D1(704×576 /704×480)/CIF(352×288/352×240)	
Frame Rate	Main Stream	1080P/720P(1 ~ 25/30fps)	
	Sub Stream	D1/CIF(1 ~ 25/30fps)	
Bit Rate		H.264: 40K ~ 8192Kbps	
Audio			
Compression		N/A	
Interface		N/A	
Network			
Ethernet		RJ-45 (10/100Base-T)	
Wi-Fi		N/A	
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour	
Compatibility		ONVIF, PSIA, CGI	
Max. User Access		20 users	

## DH-IPC-HDBW2201R-ZS/VFS

Smart Phone	iPhone, iPad, Android, Windows Phone	
Auxiliary Interface		
Memory Slot	Micro SD, Max 64GB	
RS485	N/A	
Alarm	N/A	
PIR Sensor Range	N/A	
General		
Power Supply	DC12V, PoE (802.3af)	
Power Consumption	<4W	<7.5W
Working Environment	-30°C~+60°C, Less than 95% RH	
Ingress Protection	IP66	
Vandal Resistance	IK10	
Dimensions	φ122mm×89mm	
Weight	0.5kg	

## DH-IPC-HDBW2201R-ZS/VFS

### Dimensions (mm)

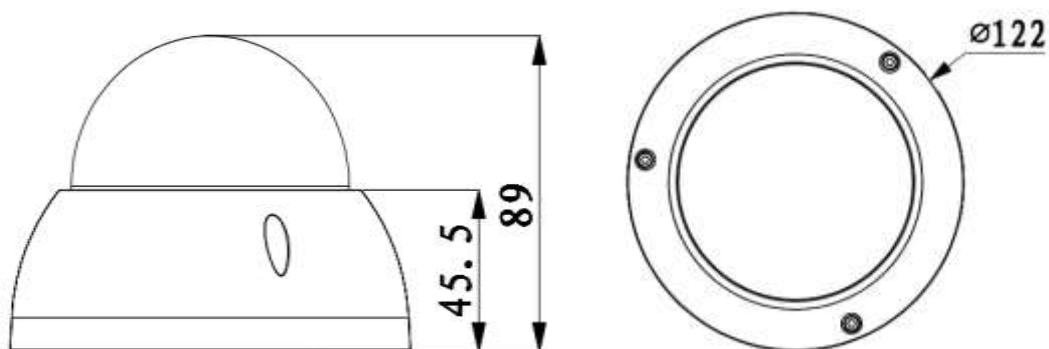

### Accessories(optional)



---

#### Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

\*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.