

DH-HAC-HDW1000R28S3

1Megapixel 720P HDCVI IR Eyeball Camera



Features

- ☒ 1/4" 1Megapixel CMOS
- ☒ 25/30fps@720P
- ☒ High speed, long distance real-time transmission
- ☒ HD and SD switchable
- ☒ OSD Menu, control over coaxial cable
- ☒ DWDR, Day/Night(ICR), AWB, AGC, BLC, 2DNR
- ☒ 2.8mm fixed lens
- ☒ Max. IR LEDs length 20m, Smart IR
- ☒ DC12V


DH-HAC-HDW1000R28S3

Technical Specifications

| | |
|--------------------------|--|
| Model | DH-HAC-HDW10 00R28S3 |
| Camera | |
| Image Sensor | 1/4" 1Megapixel CMOS |
| Effective Pixels | 1280(H)×720(V) |
| Electronic Shutter | 1/60s~1/100,000s |
| Video Frame Rate | 30fps@720P |
| Synchronization Internal | |
| Min. Illumination | 0.05Lux/F2.0, 0Lux IR on |
| Video Output | 1-channel BNC high definition video output/ CVBS standard definition video output (Can switch) |
| Camera Features | |
| Max. IR LEDs Length | 20m, Smart IR |
| Day/Night | Auto(ICR)/Color/B/W |
| Backlight Compensation | DWDR |
| Noise Reduction | 2D |
| OSD Menu | Support |
| Lens | |
| Focal Length | 2.8mm |
| Angle of View | H: 60° (83.4°) |
| Mount Type | M12 |
| General | |
| Power Supply | DC12V±25% |
| Power Consumption | Max 2.8W |
| Working Environment | -30°C~+60°C / Less than 95%RH (no condensation) |
| Transmission Distance | Over 800m via 75-3 coaxial cable |
| Dimensions | Φ85mm×69mm |
| Weight | 0.1kg |
| Material | Plastic |

DH-HAC-HDW1000R28S3

Dimensions (mm)

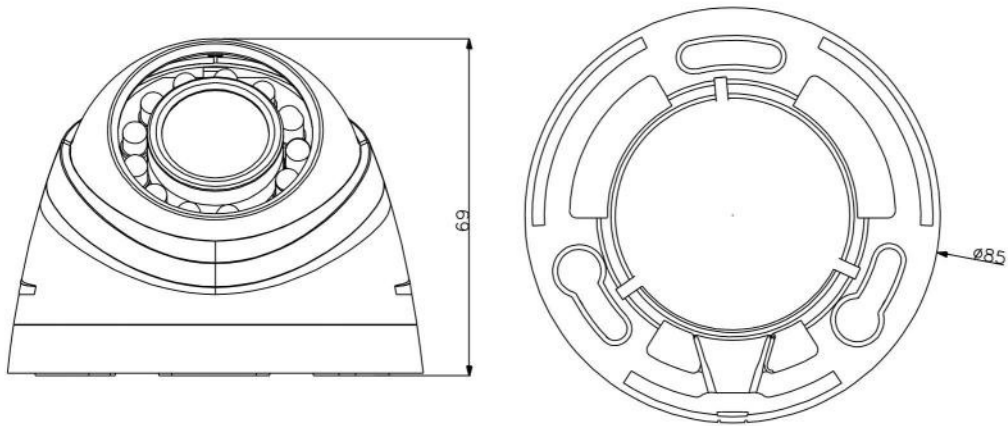

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology