

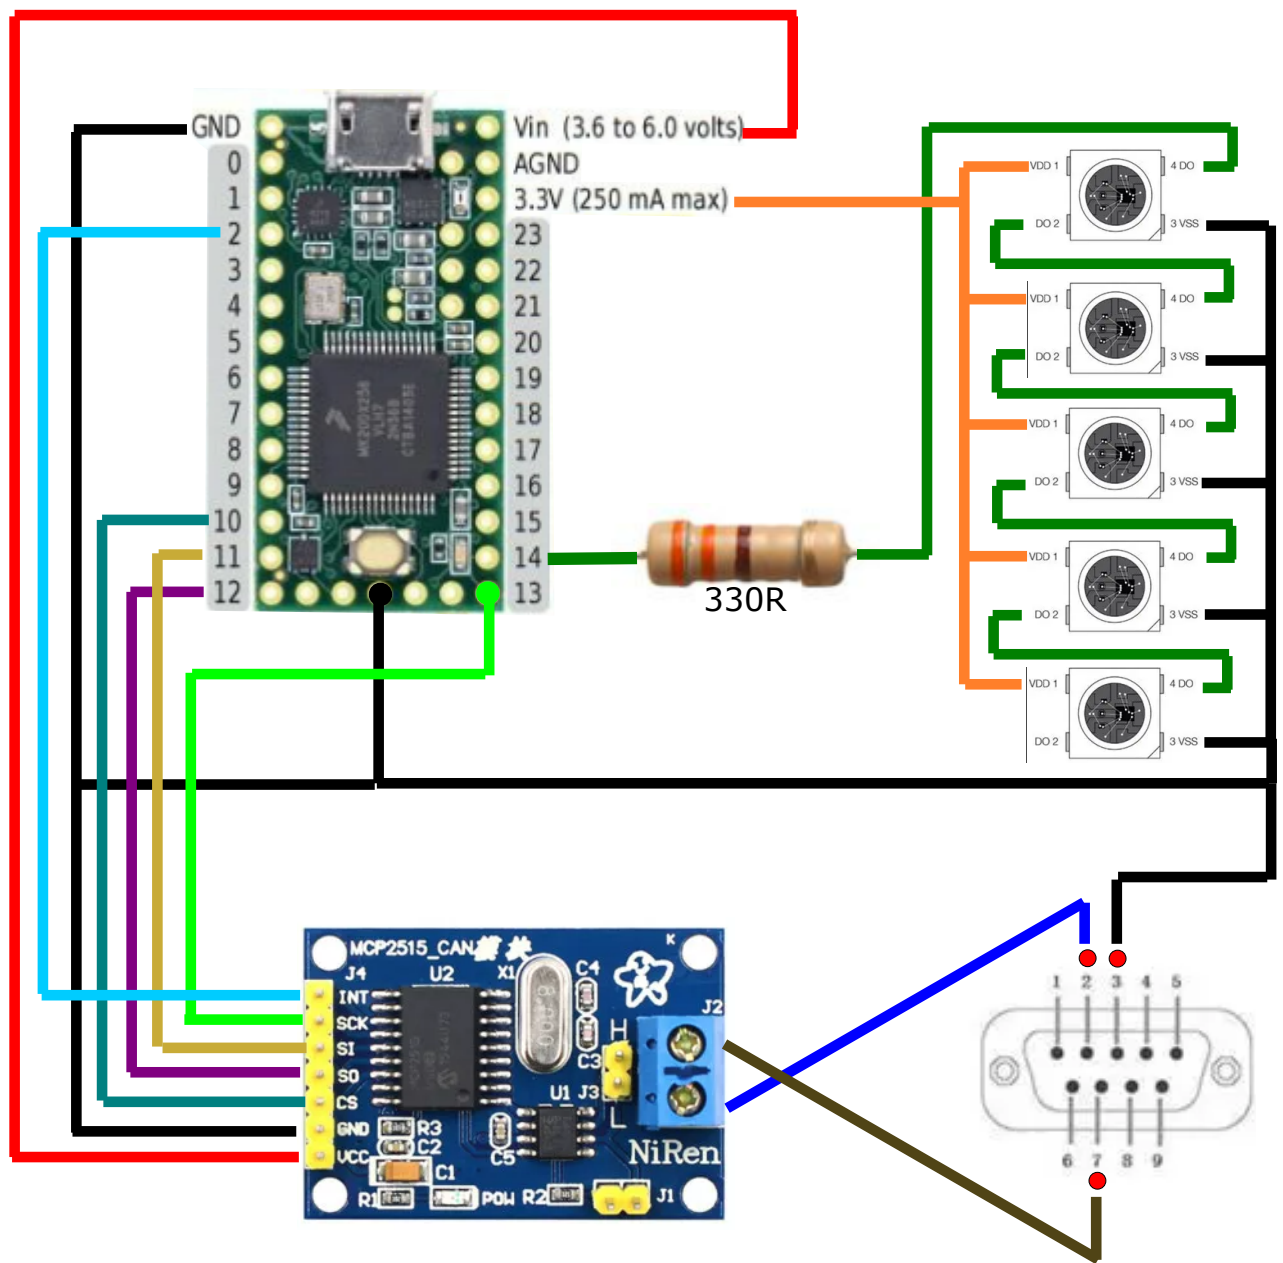


Pin 1	N/A
Pin 2	CAN_L
Pin 3	GND
Pin 4	N/A
Pin 5	N/A
Pin 6	N/A
Pin 7	CAN_H
Pin 8	N/A
Pin 9	N/A

MALE Pinout



FEMALE Pinout



DSUB DB9 Connector pin map			
Pin #	Signal Name	Description	Mandatory / Optional
1	Reserved	Do not connect / Unused	—
2	CAN_L	CAN Low (Dominant Low Bus Line)	Mandatory
3	CAN_GND	CAN Ground (0V Signal Reference)	Mandatory
4	Reserved	Do not connect / Unused	—
5	CAN_SHLD	Shield (Optional Ground / Cable Braiding)	Optional
6	GND	Optional Secondary Ground Reference	Optional
7	CAN_H	CAN High (Dominant High Bus Line)	Mandatory
8	Reserved	Do not connect / Unused	—
9	CAN_V+	Power Supply / V+ (Optional 5V / 12V bus power)	Optional

Teensy 3.2 Connections			
COMPONENT	Pin	Connection/Signal	Notes
MCP2515 VCC	5V	5V Power	Powered from USB 5V rail
MCP2515 GND	GND	Ground	Common system ground
MCP2515 CS	Pin 10	SPI Chip Select	Hardware SPI
MCP2515 SCK	Pin 13	SPI Clock	Hardware SPI
MCP2515 SI (MOSI)	Pin 11	SPI Data In	Hardware SPI
MCP2515 SO (MISO)	Pin 12	SPI Data Out	Hardware SPI
MCP2515 INT	Pin 2	Interrupt	Hardware RX Interrupt Line
WS2812 Chain DIN	Pin 14 (A0)	Data Input	Connects to DIN on LED 0 (via 300 - 500 Ohm resistor)
WS2812 VCC	5V	5V Power	5V power line for all 5 Neopixels
WS2812 GND	GND	Ground	Common ground