It is expressed as $-\frac{dT}{dx}$ and its unit is kelvin per meter (K/m). Here dT is the small change in temp. over a small distance dx and -ve sign indicates that temp. falls with distance.

## One dim^n steady state heat conduction through plane wall

Consider parallel sided plane wall of thickness L and uniform cross-section area A. as shown in figure. Let K be the thermal conductivity of wall material through which heat is flowing only in x-direction.

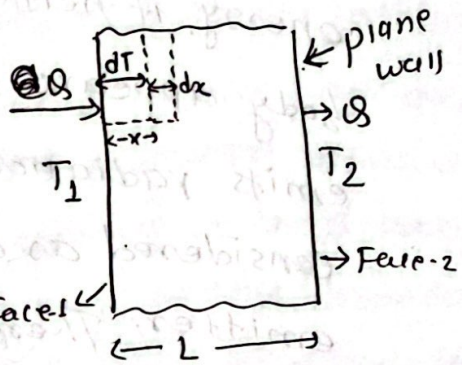


[Fig: plane wall]

Let $T_1$ and $T_2$ are the temp. of higher temp. face-1 and lower temp. face-2. The small change of temp. dT when the particles conduct ~~the~~ every small distance dx.

According to fourier law, the rate of heat transfer is given by

$$\frac{dQ}{dt} = -KA\frac{dT}{dx}$$

$$\text{or } \frac{dQ}{dt}dx = -KA\,dT \quad \text{—(1)}$$

To obtain the rate of flow of heat through this whole wall is obtained by integrating eq^n (1), we get

$$\int_0^L \frac{dQ}{dt}dx = \int_{T_1}^{T_2} -KA\,dT$$

$$\text{or } \frac{dQ}{dt}\int_0^L dx = -KA\int_{T_1}^{T_2} dT$$

$$\text{or } \frac{dQ}{dt}[L-0] = -KA[T_2-T_1]$$

$$\text{or } dQ/dt = \frac{KA(T_1-T_2)}{L}$$

$$\frac{dQ}{dt} = \frac{(T_1-T_2)}{L/KA} \quad \text{—(2)}$$

where $\frac{L}{KA}$ = Thermal resistance $R_{th}$

$$\therefore \frac{dQ}{dt} = \frac{T_1-T_2}{R_{th}} \quad \text{—(3)}$$

This eq^n (3) gives the rate of flow of heat through the wall. If $R_{th}$ increases, $\frac{dQ}{dt}$ decreases and

## Black body and black body radiation

A perfect black body is one which absorbs heat radiation of all wavelengths falling on it and emits radiations of all possible wavelengths when heated.

For a perfect black body absorptance (a) = 1 an emissivity (e) = 1. When a body absorbs all radian energy, it neither reflect nor it transmit. As a result body appears black and known as black body. Sun emits radiations of all wavelengths. So it can be considered as a black body. A good absorber is a go emitter. Therefore, a black body is a good emitter and can emit the radiation of all possible wavel

A perfect black body cannot be realized in actual practice. The nearest approach to a perfe black body is a surface coated with lamp black platinum black. Such a surface absorbs 96% to 98% the incident radiation. Ferry's body is an example perfectly black body realized in practice.

## Ferry's black body:

Ferry's black body is a close approximation of perfectly black body which can be realized in practice. Ferry's b consists of a double walled hollow copper sphere with small fine hole O and a conical projection P oppos to O as shown in figure.

A heating filament is kept in between two ~~roots~~ walls of the sphere and inner surface of sphe is coated with lamp black or platinum black.

Scanned with CamScanner

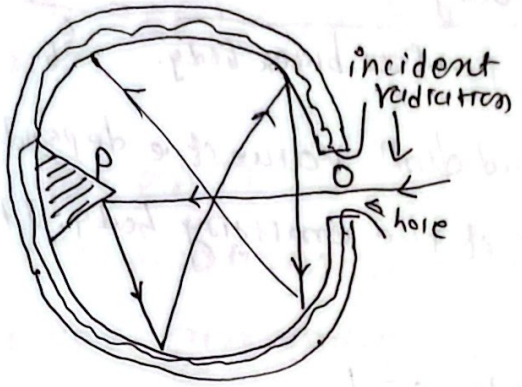


[Fig: Ferry's black body]

When heat radiation falls on the conical projection P through hole O, projection P prevents the direct reflection of incident radiation rather it causes multiple reflections of radiations inside the sphere. most of the incident radiation is absorbed by lamp black or platinum black and remaining part is also lost by multiple reflection. When the sphere is heated by passing electric current to the heating filament, radiations of all possible wavelengths come out from the hole O. Hence, the hole O behaves as a black body.

## Emissive power

It is the amount of heat radiations radiated by a unit area of a black body per unit time at a particular temp. It is denoted by E. Mathematically,

$$\text{Emissive power } E = \frac{\text{Energy radiated } (Q)}{\text{Area } (A) \times \text{time } (t)} = \frac{Q}{A \times t}$$

$$\therefore E = \frac{Q/t}{A} = \frac{P}{A}$$

$$\text{unit of } E = \frac{J/sec}{m^2} = W/m^2.$$

According to Stefan's-Boltzmann law,

$E = \sigma T^4$ where $\sigma$ = Stefan-Boltzmann constant $= 5.67 \times 10^{-8}\ W/m^2 K^4$.

## Emissivity (e):

Emissivity of a body is defined as the ratio of emissive power of a given body to the emissive power of a perfectly black body of same size at the same temp. It is denoted by e.

Scanned with CamScanner

$$\therefore e = \frac{\text{emissive power of body}}{\text{emissive power of perfect black body.}} = \frac{E}{E_b}.$$

Emissivity has no unit and dim$^n$. Value of e depends on the nature of the surface of the emitting body. It ranges from 0 to 1.

For a perfectly black body, $e = 1$

" a black body $e < 1$

For a perfectly reflecting surface $e = 0$.

## Stefan's-Boltzmann's law of black body radiation:

Stefan's declared experimentally that energy radiated by a body depends only on its temp. and he put forward a law known as Stefan's law.

Stefan's-Boltzmann law states that " emissive power of a black body is directly proportional to the fourth power of absolute temp. of surface of the body".

let E be the emissive power of a black body at absolute temp. T. Then, according to Stefan's-Boltzmann law $E \propto T^4$

or $E = \sigma T^4$ — (1) where $\sigma$ is proportionality constant is called Stefan's Const. The value of $\sigma$ in system is $5.67 \times 10^{-8}\ Wm^{-2}K^{-4}$.
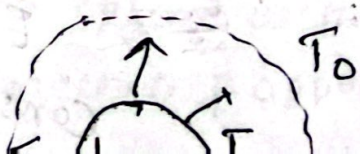
If a body is not perfectly black,