

PORTABLE FIRE EXTINGUISHERS

When addressing fire safety for work and business applications, fire extinguishers of the right type, located in the right locations are a must. No matter whether your location is an industrial site, commercial premises, office building or warehouse, easy access to portable fire equipment is essential.

To address these location specific fire-fighting applications, Firex offers a wide range of fire extinguisher products such as: AB:E Dry Powder, B:E Dry Powder, Air Water, Air Foam, Wet Chemical, and CO2 extinguishers.



1.0KG ABE DRY CHEMICAL POWDER FIRE EXTINGUISHER

SPECIFICATIONS



PRODUCT CODE	FXM10
CAPACITY	1.0 kg
FIRE RATING	1A:10B:E
AGENT	90% MAP Dry Chemical Powder
OPERATING PRESSURE	1000 kPa
DISCHARGE TIME	9 seconds
PRODUCT DIMENSIONS (H X CYL Ø)	300 mm X 95 mm
CYLINDER THICKNESS	1.0 mm
OVERALL MASS	2.0 kg
CYLINDER	Steel, UV Powder Coat
HANDLE	Stainless Steel
VALVE	Chrome plated Brass
NOZZLE	Nickel plated Brass
APPROVALS	AS/NZS 1841.5
SHIPPING DIMENSIONS (H W D)	320 mm X 110 mm X 105 mm
CASE QTY	10
PALLET QTY	300
BRACKET SUPPLIED	Vehicle Bracket



APPLICATION

- Suitable for A Class Fires (paper, wood, textiles)
- Suitable for B Class Fires (flammable liquid fires such as oils, paints and solvents)
- Suitable for E Class Fires (energised electrical fires such as switch boards and electrical motors)

1.5KG ABE DRY CHEMICAL POWDER FIRE EXTINGUISHER

SPECIFICATIONS



PRODUCT CODE	FXM15
CAPACITY	1.5 kg
FIRE RATING	1A:20B:E
AGENT	90% MAP Dry Chemical Powder
OPERATING PRESSURE	1000 kPa
DISCHARGE TIME	13 seconds
PRODUCT DIMENSIONS (H X CYL Ø)	385 mm X 90 mm
CYLINDER THICKNESS	1.0 mm
OVERALL MASS	2.7 kg
CYLINDER	Steel, UV Powder Coat
HANDLE	Stainless Steel
VALVE	Chrome plated Brass
HOSE	EPDM, Brass ferrules
APPROVALS	AS/NZS 1841.5
SHIPPING DIMENSIONS (H W D)	390 mm X 130 mm X 130 mm
CASE QTY	6
PALLET QTY	216
BRACKET SUPPLIED	Vehicle Bracket



APPLICATION

- Suitable for A Class Fires (paper, wood, textiles)
- Suitable for B Class Fires (flammable liquid fires such as oils, paints and solvents)
- Suitable for E Class Fires (energised electrical fires such as switch boards and electrical motors)

2.0KG ABE DRY CHEMICAL POWDER FIRE EXTINGUISHER



SPECIFICATIONS

PRODUCT CODE	FXM20
CAPACITY	2.0 kg
FIRE RATING	2A:30B:E
AGENT	90% MAP Dry Chemical Powder
OPERATING PRESSURE	1000 kPa
DISCHARGE TIME	14 seconds
PRODUCT DIMENSIONS (H X CYL Ø)	390 mm X 120 mm
CYLINDER THICKNESS	1.0 mm
OVERALL MASS	3.4 kg
CYLINDER	Steel, UV Powder Coat
HANDLE	Stainless Steel
VALVE	Chrome plated Brass
HOSE	EPDM, Brass ferrules
APPROVALS	AS/NZS 1841.5
SHIPPING DIMENSIONS (H W D)	410 mm X 150 mm X 130 mm
PALLET QTY	176
BRACKET SUPPLIED	Vehicle Bracket



APPLICATION

- Suitable for A Class Fires (paper, wood, textiles)
- Suitable for B Class Fires (flammable liquid fires such as oils, paints and solvents)
- Suitable for E Class Fires (energised electrical fires such as switch boards and electrical motors)

2.5KG ABE DRY CHEMICAL POWDER FIRE EXTINGUISHER



SPECIFICATIONS

PRODUCT CODE	FXM25
CAPACITY	2.5 kg
FIRE RATING	3A:40B:E
AGENT	90% MAP Dry Chemical Powder
OPERATING PRESSURE	1000 kPa
DISCHARGE TIME	15 seconds
PRODUCT DIMENSIONS (H X CYL Ø)	400 mm X 120 mm
CYLINDER THICKNESS	1.2 mm
OVERALL MASS	4.2 kg
CYLINDER	Steel, UV Powder Coat
HANDLE	Stainless Steel
VALVE	Chrome plated Brass
HOSE	EPDM, Brass ferrules
HOSE RETAINER	Stainless Steel
APPROVALS	AS/NZS 1841.5
SHIPPING DIMENSIONS (H W D)	430 mm X 150 mm X 130 mm
PALLET QTY	176
BRACKET SUPPLIED	Vehicle & Wall Brackets



APPLICATION

- Suitable for A Class Fires (paper, wood, textiles)
- Suitable for B Class Fires (flammable liquid fires such as oils, paints and solvents)
- Suitable for E Class Fires (energised electrical fires such as switch boards and electrical motors)

4.5KG ABE DRY CHEMICAL POWDER FIRE EXTINGUISHER



SPECIFICATIONS

PRODUCT CODE	FXM45
CAPACITY	4.5 kg
FIRE RATING	4A:60B:E
AGENT	90% MAP Dry Chemical Powder
OPERATING PRESSURE	1500 kPa
DISCHARGE TIME	21 seconds
PRODUCT DIMENSIONS (H X CYL Ø)	480 mm X 145 mm
CYLINDER THICKNESS	1.5 mm
OVERALL MASS	7.2 kg
CYLINDER	Steel, UV Powder Coat
HANDLE	Stainless Steel
VALVE	Chrome plated Brass
HOSE	EPDM, Brass ferrules
HOSE RETAINER	Stainless Steel
APPROVALS	AS/NZS 1841.5
SHIPPING DIMENSIONS (H W D)	550 mm X 160 mm X 160 mm
PALLET QTY	130
BRACKET SUPPLIED	Wall Bracket



APPLICATION

- Suitable for A Class Fires (paper, wood, textiles)
- Suitable for B Class Fires (flammable liquid fires such as oils, paints and solvents)
- Suitable for E Class Fires (energised electrical fires such as switch boards and electrical motors)

9.0KG ABE DRY CHEMICAL POWDER FIRE EXTINGUISHER



SPECIFICATIONS

PRODUCT CODE	FXM90
CAPACITY	9.0 kg
FIRE RATING	6A:80B:E
AGENT	90% MAP Dry Chemical Powder
OPERATING PRESSURE	1500 kPa
DISCHARGE TIME	25 seconds
PRODUCT DIMENSIONS (H X CYL Ø)	650 mm X 175 mm
CYLINDER THICKNESS	2.0 mm
OVERALL MASS	14.2 kg
CYLINDER	Steel, UV Powder Coat
HANDLE	Stainless Steel
VALVE	Chrome plated Brass
HOSE	EPDM, Brass ferrules
HOSE RETAINER	Stainless Steel
APPROVALS	AS/NZS 1841.5
SHIPPING DIMENSIONS (H W D)	660 mm X 200 mm X 190 mm
PALLET QTY	57
BRACKET SUPPLIED	Wall Bracket



APPLICATION

- Suitable for A Class Fires (paper, wood, textiles)
- Suitable for B Class Fires (flammable liquid fires such as oils, paints and solvents)
- Suitable for E Class Fires (energised electrical fires such as switch boards and electrical motors)

2.5KG BE DRY CHEMICAL POWDER FIRE EXTINGUISHER

SPECIFICATIONS



PRODUCT CODE	FXR25
CAPACITY	2.5 kg
FIRE RATING	30B:E
AGENT	82% Dry Chemical Powder
OPERATING PRESSURE	1000 kPa
DISCHARGE TIME	13 seconds
PRODUCT DIMENSIONS (H X CYL Ø)	400 mm X 120 mm
CYLINDER THICKNESS	1.2 mm
OVERALL MASS	4.2 kg
CYLINDER	Steel, UV Powder Coat
HANDLE	Stainless Steel
VALVE	Chrome plated Brass
HOSE	EPDM, Brass ferrules
HOSE RETAINER	Stainless Steel
APPROVALS	AS/NZS 1841.5
SHIPPING DIMENSIONS (H W D)	430 mm X 150 mm X 130 mm
PALLET QTY	176
BRACKET SUPPLIED	Vehicle & Wall Brackets



APPLICATION

- Suitable for B Class Fires (flammable liquid fires such as oils, paints and solvents)
- Suitable for E Class Fires (energised electrical fires such as switchboards and electrical motors).
- Can also be used on F Class Fires (cooking oils and fat fires)

4.5KG BE DRY CHEMICAL POWDER FIRE EXTINGUISHER

SPECIFICATIONS



PRODUCT CODE	FXR45
CAPACITY	4.5 kg
FIRE RATING	40B:E
AGENT	82% Dry Chemical Powder
OPERATING PRESSURE	1500 kPa
DISCHARGE TIME	18 seconds
PRODUCT DIMENSIONS (H X CYL Ø)	480 mm X 145 mm
CYLINDER THICKNESS	1.5 mm
OVERALL MASS	7.2 kg
CYLINDER	Steel, UV Powder Coat
HANDLE	Stainless Steel
VALVE	Chrome plated Brass
HOSE	EPDM, Brass ferrules
HOSE RETAINER	Stainless Steel
APPROVALS	AS/NZS 1841.5
SHIPPING DIMENSIONS (H W D)	550 mm X 160 mm X 160 mm
PALLET QTY	130
BRACKET SUPPLIED	Wall Bracket



APPLICATION

- Suitable for B Class Fires (flammable liquid fires such as oils, paints and solvents)
- Suitable for E Class Fires (energised electrical fires such as switchboards and electrical motors).
- Can also be used on F Class Fires (cooking oils and fat fires)

9.0KG BE DRY CHEMICAL POWDER FIRE EXTINGUISHER



SPECIFICATIONS

PRODUCT CODE	FXR90
CAPACITY	9.0kg
FIRE RATING	80B:E
AGENT	82% Dry Chemical Powder
OPERATING PRESSURE	1500 kPa
DISCHARGE TIME	21 seconds
PRODUCT DIMENSIONS (H X CYL Ø)	650 mm X 175MM
CYLINDER THICKNESS	2.0 mm
OVERALL MASS	14.2 kg
CYLINDER	Steel, UV Powder Coat
HANDLE	Stainless Steel
VALVE	Chrome plated Brass
HOSE	EPDM, Brass ferrules
HOSE RETAINER	Stainless Steel
APPROVALS	AS/NZS 1841.5
SHIPPING DIMENSIONS (H W D)	660 mm X 200MM X 190MM
PALLET QTY	57
BRACKET SUPPLIED	Wall Bracket



APPLICATION

- Suitable for B Class Fires (flammable liquid fires such as oils, paints and solvents)
- Suitable for E Class Fires (energised electrical fires such as switchboards and electrical motors).
- Can also be used on F Class Fires (cooking oils and fat fires)

2.0KG CO2 FIRE EXTINGUISHER

SPECIFICATIONS



PRODUCT CODE	FXC20
CAPACITY	2.0 kg
FIRE RATING	2B:E
AGENT	CO ₂
DISCHARGE TIME	9 seconds
PRODUCT DIMENSIONS (H X CYL Ø)	540 mm X 110 mm
OVERALL MASS	5.2 kg
CYLINDER	Lightweight Aluminium, UV Powder Coat
HANDLE	Stainless Steel
VALVE	Chrome plated Brass
APPROVALS	AS/NZS 1841.6
SHIPPING DIMENSIONS (H W D)	570 mm X 200 mm X 170 mm
PALLET QTY	60
BRACKET SUPPLIED	Wall Bracket



APPLICATION

- Suitable for B Class Fires (flammable liquid fires such as oils, paints and solvents)
- Suitable for E Class Fires (energised electrical fires such as switchboards, electrical motors and electronic equipment)
- Generally not suitable for outside use
- CO₂ is a clean nontoxic gas that can penetrate and spread to all parts of the fire area.

3.5KG CO2 FIRE EXTINGUISHER

SPECIFICATIONS



PRODUCT CODE	FXC35
CAPACITY	3.5 kg
FIRE RATING	5B:E
AGENT	CO ₂
DISCHARGE TIME	12 seconds
PRODUCT DIMENSIONS (H X CYL Ø)	585 mm X 140 mm
OVERALL MASS CYLINDER	9.3 kg Lightweight Aluminium, UV Powder Coat
HANDLE	Stainless Steel
VALVE	Chrome plated Brass
HOSE	EPDM, Alloy hose retaining clip
APPROVALS	AS/NZS 1841.6
SHIPPING DIMENSIONS (H W D)	620 mm X 250 mm X 170 mm
PALLET QTY	64
BRACKET SUPPLIED	Wall Bracket



APPLICATION

- Suitable for B Class Fires (flammable liquid fires such as oils, paints and solvents)
- Suitable for E Class Fires (energised electrical fires such as switchboards, electrical motors and electronic equipment)
- Generally not suitable for outside use
- CO₂ is a clean nontoxic gas that can penetrate and spread to all parts of the fire area.

5.0KG CO2 FIRE EXTINGUISHER

SPECIFICATIONS



PRODUCT CODE	FXC50
CAPACITY	5.0 kg
FIRE RATING	5B:E
AGENT	CO ₂
DISCHARGE TIME	14 seconds
PRODUCT DIMENSIONS (H X CYL Ø)	670 mm X 150 mm
OVERALL MASS CYLINDER	12.4 kg Lightweight Aluminium, UV Powder Coat
HANDLE	Stainless Steel
VALVE	Chrome plated Brass
HOSE	EPDM, Alloy hose retaining clip
APPROVALS	AS/NZS 1841.6
SHIPPING DIMENSIONS (H W D)	690 mm X 260 mm X 170 mm
PALLET QTY	64
BRACKET SUPPLIED	Wall Bracket



APPLICATION

- Suitable for B Class Fires (flammable liquid fires such as oils, paints and solvents)
- Suitable for E Class Fires (energised electrical fires such as switchboards, electrical motors and electronic equipment)
- Generally not suitable for outside use
- CO₂ is a clean nontoxic gas that can penetrate and spread to all parts of the fire area.

2L WET CHEMICAL FIRE EXTINGUISHER



SPECIFICATIONS

PRODUCT CODE	FXWC20
CAPACITY	2.0 L
FIRE RATING	1A:4F
AGENT	Wet Chemical
OPERATING PRESSURE	700 kPa
DISCHARGE TIME	29 seconds
PRODUCT DIMENSIONS (H X CYL Ø)	470 mm X 100 mm
OVERALL MASS	4.2 kg
CYLINDER	Stainless Steel, UV Powder Coat
HANDLE	Stainless Steel
VALVE	Chrome plated Brass
HOSE	EPDM, Brass nozzle
APPROVALS	AS/NZS 1841.3
SHIPPING DIMENSIONS (H W D)	480 mm X 170 mm X 120 mm
PALLET QTY	130
BRACKET SUPPLIED	Wall Bracket



APPLICATION

- Suitable for A Class Fires (paper, wood, textiles)
- Suitable for F Class Fires (cooking oils and fats)
- Dangerous if used on energised electrical equipment

7L WET CHEMICAL FIRE EXTINGUISHER



SPECIFICATIONS

PRODUCT CODE	FXWC70
CAPACITY	7.0 L
FIRE RATING	3A:4F
AGENT	Wet Chemical
OPERATING PRESSURE	700 kPa
DISCHARGE TIME	44 seconds
PRODUCT DIMENSIONS (H X CYL Ø)	650 mm X 180 mm
OVERALL MASS	12.5 kg
CYLINDER	Stainless Steel, UV Powder Coat
HANDLE	Stainless Steel
VALVE	Chrome plated Brass
HOSE	EPDM, Brass nozzle
APPROVALS	AS/NZS 1841.3
SHIPPING DIMENSIONS (H W D)	660 mm X 200 mm X 190 mm
PALLET QTY	58
BRACKET SUPPLIED	Wall Bracket



APPLICATION

- Suitable for A Class Fires (paper, wood, textiles)
- Suitable for F Class Fires (cooking oils and fats)
- Dangerous if used on energised electrical equipment

9.0L AIR FOAM FIRE EXTINGUISHER



SPECIFICATIONS

PRODUCT CODE	FXAF
CAPACITY	9.0 L
FIRE RATING	3A:20B
AGENT	Tridol S 6% AFFF
OPERATING PRESSURE	1000 kPa
DISCHARGE TIME	45 seconds
PRODUCT DIMENSIONS (H X CYL Ø)	630 mm X 180 mm
OVERALL MASS	12.5 kg
CYLINDER	Stainless Steel, UV Powder Coat
HANDLE	Stainless Steel
VALVE	Chrome plated Brass
HOSE	EPDM
APPROVALS	AS/NZS 1841.4
SHIPPING DIMENSIONS (H W D)	660 mm X 200 mm X 190 mm
PALLET QTY	58
BRACKET SUPPLIED	Wall Bracket



APPLICATION

- Suitable for A Class Fires - (paper, wood, textiles)
- Suitable for B Class Fires - (flammable liquid fires such as oils, petrols and solvents)
- Dangerous if used on energised electrical equipment

9.0L AIR WATER FIRE EXTINGUISHER

SPECIFICATIONS



PRODUCT CODE	FXAW
CAPACITY	9.0 L
FIRE RATING	3A
AGENT	H ₂ O with Corrosion Inhibiting Agent
OPERATING PRESSURE	690 kPa
DISCHARGE TIME	65 seconds
PRODUCT DIMENSIONS (H W D)	630 mm X 180 mm
OVERALL MASS	12.5 kg
CYLINDER	Stainless Steel, UV Powder Coat
HANDLE	Stainless Steel
VALVE	Chrome plated Brass
HOSE	EPDM
APPROVALS	AS/NZS 1841.2
SHIPPING DIMENSIONS (H W D)	660 mm X 200 mm X 190 mm
PALLET QTY	58
BRACKET SUPPLIED	Wall Bracket



APPLICATION

- Suitable for A Class Fires - (paper, wood, textiles)
- Dangerous if used on flammable liquid, energised electrical equipment and cooking oil/fat fires

MOBILE FIRE EXTINGUISHERS

Firex's range of mobile fire extinguishers are designed to meet the demands of off-shore oil platforms, petrochemical plants, mining, large commercial warehouses and more. Our extinguishing agents include AB:E dry chemical powder and AFFF Foam, come in four different sizes and are ideal for handling the toughest situations.



25KG ABE DRY CHEMICAL POWDER MOBILE EXTINGUISHER



SPECIFICATIONS

PRODUCT CODE	FXPMOB25
CAPACITY	25 kg
FIRE RATING	6A:80B:E *
AGENT	90% MAP Dry Chemical Powder
OPERATING PRESSURE	1500 kPa
OVERALL MASS	54 kg
DISCHARGE DISTANCE	18 m approx.
PRODUCT DIMENSIONS (H W D)	1300 mm X 595 mm X 590 mm
PRESSURE TEST	5 yearly
HOSE LENGTH	5 m
VALVE	Nickel plated Brass
CYLINDER	Stainless Steel, UV Powder Coat
TROLLEY	Steel, UV Powder Coat
TYRES	Pneumatic
APPROVALS	AS 4265

* 9.0kg of this extinguishant has obtained a 6A:80B:E rating under test conditions for a portable extinguisher given in AS 1850.



APPLICATION

- Suitable for A Class Fires (paper, wood, textiles)
- Suitable for B Class Fires (flammable liquid fires such as oils, paints and solvents)
- Suitable for E Class Fires (energised electrical fires such as switch boards and electrical motors)
- Appropriate for use in:
 - High coverage areas
 - Remote airstrips where access to water is limited
 - Small fuel storage areas
 - Mining sites
 - Manufacturing plants
 - Large storage facilities

50KG ABE DRY CHEMICAL POWDER MOBILE EXTINGUISHER



SPECIFICATIONS

PRODUCT CODE	FXPMOB50
CAPACITY	50 kg
FIRE RATING	6A:80B:E *
AGENT	90% MAP Dry Chemical Powder
OPERATING PRESSURE	1500 kPa
OVERALL MASS	79 kg
DISCHARGE DISTANCE	18 m approx.
PRODUCT DIMENSIONS (H W D)	1300 mm X 595 mm X 590 mm
PRESSURE TEST	5 yearly
HOSE LENGTH	5 m
VALVE	Nickel coated Brass
CYLINDER	Stainless Steel, UV Powder Coat
TROLLEY	Steel, UV Powder Coat
TYRES	Pneumatic
APPROVALS	AS 4265

* 9.0kg of this extinguishant has obtained a 6A:80B:E rating under test conditions for a portable extinguisher given in AS 1850.



APPLICATION

- Suitable for A Class Fires (paper, wood, textiles)
- Suitable for B Class Fires (flammable liquid fires such as oils, paints and solvents)
- Suitable for E Class Fires (energised electrical fires such as switch boards and electrical motors)
- Appropriate for use in:
 - High coverage areas
 - Remote airstrips where access to water is limited
 - Small fuel storage areas
 - Mining sites
 - Manufacturing plants
 - Large storage facilities

75KG ABE DRY CHEMICAL POWDER MOBILE EXTINGUISHER

SPECIFICATIONS



PRODUCT CODE	FXPM0B75
CAPACITY	75 kg
FIRE RATING	6A:80B:E *
AGENT	90% MAP Dry Chemical Powder
OPERATING PRESSURE	1500 kPa
OVERALL MASS	117 kg
DISCHARGE DISTANCE	18 m
PRODUCT DIMENSIONS (H W D)	1300 mm X 595 mm X 690 mm
PRESSURE TEST	5 yearly
HOSE LENGTH	5 m
VALVE	Nickel coated Brass
CYLINDER	Stainless Steel, UV Powder Coat
TROLLEY	Steel, UV Powder Coat
TYRES	Pneumatic
APPROVALS	AS 4265

* 9.0kg of this extinguishant has obtained a 6A:80B:E rating under test conditions for a portable extinguisher given in AS 1850.



APPLICATION

- Suitable for A Class Fires (paper, wood, textiles)
- Suitable for B Class Fires (flammable liquid fires such as oils, paints and solvents)
- Suitable for E Class Fires (energised electrical fires such as switch boards and electrical motors)
- Appropriate for use in:
 - High coverage areas
 - Remote airstrips where access to water is limited
 - Small fuel storage areas
 - Mining sites
 - Manufacturing plants
 - Large storage facilities

100KG ABE DRY CHEMICAL POWDER MOBILE EXTINGUISHER



SPECIFICATIONS

PRODUCT CODE	FXPM0B100
CAPACITY	100 kg
FIRE RATING	6A:80B:E *
AGENT	90% MAP Dry Chemical Powder
OPERATING PRESSURE	1500 kPa
OVERALL MASS	142 kg
DISCHARGE DISTANCE	18 m
PRODUCT DIMENSIONS (H W D)	1300 mm X 595 mm X 690 mm
PRESSURE TEST	5 yearly
HOSE LENGTH	5 m
VALVE	Nickel coated Brass
CYLINDER	Stainless Steel, UV Powder Coat
TROLLEY	Steel, UV Powder Coat
TYRES	Pneumatic
APPROVALS	AS 4265

* 9.0kg of this extinguishant has obtained a 6A:80B:E rating under test conditions for a portable extinguisher given in AS 1850.



APPLICATION

- Suitable for A Class Fires (paper, wood, textiles)
- Suitable for B Class Fires (flammable liquid fires such as oils, paints and solvents)
- Suitable for E Class Fires (energised electrical fires such as switch boards and electrical motors)
- Appropriate for use in:
 - High coverage areas
 - Remote airstrips where access to water is limited
 - Small fuel storage areas
 - Mining sites
 - Manufacturing plants
 - Large storage facilities

25L AIR FOAM MOBILE EXTINGUISHER



SPECIFICATIONS

PRODUCT CODE	FXAFMOB25
CAPACITY	25 L
FIRE RATING	3A:20B *
AGENT	Tridol S 6% AFFF
OPERATING PRESSURE	1500 kPa
OVERALL MASS	54 kg
DISCHARGE DISTANCE	15 m
PRODUCT DIMENSIONS (H W D)	1300 mm X 595 mm X 590 mm
PRESSURE TEST	5 yearly
HOSE LENGTH	5 m
VALVE	Nickel coated Brass
CYLINDER	Stainless Steel, UV Powder Coat
TROLLEY	Steel, UV Powder Coat
TYRES	Pneumatic
APPROVALS	AS 4265

* 9.0L of this extinguishant has obtained a 3A:20B rating under test conditions for a portable extinguisher given in AS 1850.



APPLICATION

- Suitable for A Class Fires - (paper, wood, textiles)
- Suitable for B Class Fires - (flammable liquid fires such as oils, petrols and solvents)
- Dangerous if used on energised electrical equipment
- Appropriate for use in:
 - High coverage areas
 - Airports and remote airstrips
 - Fuel depots
 - Power stations
 - Mining sites
 - Marine terminals, offshore platforms
 - Motor race events
 - Rail / road loading facilities

50L AIR FOAM MOBILE EXTINGUISHER



SPECIFICATIONS

PRODUCT CODE	FXAFMOB50
CAPACITY	50 L
FIRE RATING	3A:20B *
AGENT	Tridol S 6% AFFF
OPERATING PRESSURE	1500 kPa
OVERALL MASS	79 kg
DISCHARGE DISTANCE	15 m
PRODUCT DIMENSIONS (H W D)	1300 mm X 595 mm X 590 mm
PRESSURE TEST	5 yearly
HOSE LENGTH	5 m
VALVE	Nickel coated Brass
CYLINDER	Stainless Steel, UV Powder Coat
TROLLEY	Steel, UV Powder Coat
TYRES	Pneumatic
APPROVALS	AS 4265

* 9.0L of this extinguishant has obtained a 3A:20B rating under test conditions for a portable extinguisher given in AS 1850.



APPLICATION

- Suitable for A Class Fires - (paper, wood, textiles)
- Suitable for B Class Fires - (flammable liquid fires such as oils, petrols and solvents)
- Dangerous if used on energised electrical equipment
- Appropriate for use in:
 - High coverage areas
 - Airports and remote airstrips
 - Fuel depots
 - Power stations
 - Mining sites
 - Marine terminals, offshore platforms
 - Motor race events
 - Rail / road loading facilities

75L AIR FOAM MOBILE EXTINGUISHER

SPECIFICATIONS



PRODUCT CODE	FXAFMOB75
CAPACITY	75 L
FIRE RATING	3A:20B *
AGENT	Tridol S 6% AFFF
OPERATING PRESSURE	1500 kPa
OVERALL MASS	117 kg
DISCHARGE DISTANCE	15 m
PRODUCT DIMENSIONS (H W D)	1300 mm X 595 mm X 690 mm
PRESSURE TEST	5 yearly
HOSE LENGTH	5 m
VALVE	Nickel coated Brass
CYLINDER	Stainless Steel, UV Powder Coat
TROLLEY	Steel, UV Powder Coat
TYRES	Pneumatic
APPROVALS	AS 4265

* 9.0L of this extinguishant has obtained a 3A:20B rating under test conditions for a portable extinguisher given in AS 1850.



APPLICATION

- Suitable for A Class Fires - (paper, wood, textiles)
- Suitable for B Class Fires - (flammable liquid fires such as oils, petrols and solvents)
- Dangerous if used on energised electrical equipment
- Appropriate for use in:
 - High coverage areas
 - Airports and remote airstrips
 - Fuel depots
 - Power stations
 - Mining sites
 - Marine terminals, offshore platforms
 - Motor race events
 - Rail / road loading facilities

100L AIR FOAM MOBILE EXTINGUISHER



SPECIFICATIONS

PRODUCT CODE	FXAFMOB100
CAPACITY	100 L
FIRE RATING	3A:20B *
AGENT	Tridol S 6% AFFF
OPERATING PRESSURE	1500 kPa
OVERALL MASS	142 kg
DISCHARGE DISTANCE	15 m
PRODUCT DIMENSIONS (H W D)	1300 mm X 595 mm X 690 mm
PRESSURE TEST	5 yearly
HOSE LENGTH	5 m
VALVE	Nickel coated Brass
CYLINDER	Stainless Steel, UV Powder Coat
TROLLEY	Steel, UV Powder Coat
TYRES	Pneumatic
APPROVALS	AS 4265

* 9.0L of this extinguishant has obtained a 3A:20B rating under test conditions for a portable extinguisher given in AS 1850.



APPLICATION

- Suitable for A Class Fires - (paper, wood, textiles)
- Suitable for B Class Fires - (flammable liquid fires such as oils, petrols and solvents)
- Dangerous if used on energised electrical equipment
- Appropriate for use in:
 - High coverage areas
 - Airports and remote airstrips
 - Fuel depots
 - Power stations
 - Mining sites
 - Marine terminals, offshore platforms
 - Motor race events
 - Rail / road loading facilities

FIRE BLANKETS

The vast majority of domestic fires occur as a result of cooking. Stove and oven fires can quickly escalate out of control, putting both life and property in serious danger. It is highly recommended to always have stored, a Fire Blanket that is close to hand in the case of an emergency. Fire Blankets are particularly useful for smothering cooking oil fires, fat pan fires or for wrapping around a person whose clothing is on fire. When completely covering the fire, the Fire Blanket will starve oxygen supply to the fire helping to extinguish it. All Blankets are Australian Standards approved.



SMALL – 1M x 1M

PRODUCT CODE	FB10
DIMENSIONS	1.0 m x 1.0 m
MATERIAL	Woven fiberglass fire resistant fabric
APPROVALS	AS/NZS 3504



MEDIUM – 1.2M x 1.2M

PRODUCT CODE	FB12
DIMENSIONS	1.2 m x 1.2 m
MATERIAL	Woven fiberglass fire resistant fabric
APPROVALS	AS/NZS 3504



LARGE – 1.2M x 1.8M

PRODUCT CODE	FB1218
DIMENSIONS	1.2 m x 1.8 m
MATERIAL	Woven fiberglass fire resistant fabric
APPROVALS	AS/NZS 3504



EXTRA LARGE – 1.2M x 1.8M

PRODUCT CODE	FB1818
DIMENSIONS	1.8 m x 1.8 m
MATERIAL	Woven fiberglass fire resistant fabric
APPROVALS	AS/NZS 3504



APPLICATION

- Suitable for F Class Fires (cooking oils and fats)
- Ideal for use in the home, caravan or boat - small cooking fires and small clothing fires only.
- Fire Blankets are for single use only
- The Fire Blanket can be fixed to the wall or inside of cupboard

FIRE HOSE REELS & ACCESSORIES

Fire hose reels are located to provide an accessible and controlled supply of water to combat everyday fire risks (A Class type). A control nozzle attached to the end of the hose enables the operator to control the direction and flow of water to the fire. Firex offer a range of fixed and swing arm hose reels, together with an array of related hose reel accessories. Firex Fire Hose Reels are certified to AS/NZS 1221.



FIREX FIRE HOSE REEL FIXED - 36 MTR

SPECIFICATIONS



PRODUCT CODE	FXHRSTD36
HOSE LENGTH & INTERNAL DIAMETER	36 m X 19 mm
HOSE CONSTRUCTION	Ribbed PVC
REEL PLATE DIAMETER	550 mm
INTERNAL WATERWAY	Galvanised Steel
SUPPORT ASSEMBLY	Zinc plated Steel
INLET PIPE & UNION	Galvanised Steel
ISOLATION VALVE	Zinc coated Brass
HOSE GUIDE ARM	Zinc plated
NOZZLE	Jet and Spray twist action Brass nozzle
WALL MOUNTING BRACKET	Steel, Red Powder Coat
SHIPPING DIMENSIONS (H W D)	600 mm X 600 mm X 260 mm
OVERALL MASS	21 kg
SUPPLIED WITH	Isolation Valve with nozzle retainer, Male/Female Union Assembly, Hose Guide Arm and Wall Mounting Bracket
APPROVALS	AS/NZS 1221



APPLICATION

- Suitable for A Class Fires (paper, wood, textiles)
- Ideal for use in large high risk areas

FIRE HOSE REEL SWIVEL ARM - 36 MTR

SPECIFICATIONS



PRODUCT CODE	FXHRS36
HOSE LENGTH & INTERNAL DIAMETER	36 m X 19 mm
HOSE CONSTRUCTION	Ribbed PVC
REEL PLATE DIAMETER	550 mm
INTERNAL WATERWAY	Galvanised Steel
SUPPORT ASSEMBLY	Zinc Plated Steel
INLET PIPE & UNION	Galvanised Steel
ISOLATION VALVE	Zinc coated Brass
HOSE GUIDE ARM	Zinc Plated
NOZZLE	Jet and Spray twist action Brass nozzle
WALL MOUNTING BRACKET	Steel, Red Powder Coat
SHIPPING DIMENSIONS (H W D)	600 mm X 600 mm X 260 mm
OVERALL MASS	22 kg
SUPPLIED WITH	Isolation Valve with nozzle retainer, Male/Female Union Assembly, Hose Guide Arm and Wall Mounting Bracket
APPROVALS	AS/NZS 1211



APPLICATION

- Suitable for A Class Fires (paper, wood, textiles)
- Ideal for use in large high risk areas

FIRE HOSE REEL FIXED LKS - 36 MTR

SPECIFICATIONS



PRODUCT CODE	FHRSTD LKS
HOSE LENGTH & INTERNAL DIAMETER	36 m X 19 mm
HOSE CONSTRUCTION	Ribbed PVC
REEL PLATE DIAMETER	555 mm
PLATE CONSTRUCTION	CR-F Steel, Red Powder Coat
INTERNAL WATERWAY	Brass
GUIDE ARM	Zinc Plated
BRACKET	Easi-Fit, Galvanised
INLET PIPE	Galvanised
NOZZLE	Lever-action brass nozzle
ISOLATION VALVE	DR Brass, 25 mm Male/Female, Stainless Steel Interlock and handle
PRODUCT DIMENSIONS (DIA. X DEPTH)	555 mm X 239 mm
APPROVALS	AS/NZS 1221
MANUFACTURED	In Australia



APPLICATION

- Suitable for A Class Fires (paper, wood, textiles)
- Ideal for use in large high risk areas

FIRE HOSE REEL FIXED STAINLESS STEEL - 36 MTR

SPECIFICATIONS



PRODUCT CODE	FXHRSTD36SS
HOSE LENGTH & INTERNAL DIAMETER	36 m X 19 mm
HOSE CONSTRUCTION	Ribbed PVC
REEL PLATE DIAMETER	555 mm
PLATE CONSTRUCTION	Stainless Steel
INTERNAL WATERWAY	Stainless Steel
GUIDE ARM	Stainless Steel
BRACKET	Stainless Steel
INLET PIPE	Stainless Steel
NOZZLE	Lever-action brass nozzle
ISOLATION VALVE	Stainless Steel, 25 mm Male/ Female, Stainless Steel Interlock and handle
PRODUCT DIMENSIONS (DIA. X DEPTH)	555 mm X 239 mm
APPROVALS	AS/NZS 1221



APPLICATION

- Suitable for A Class Fires (paper, wood, textiles)
- Stainless Steel Fire Hose Reel suitable for Marine environments
- Ideal for use in large high risk areas

HOSE REEL HOSE (BLACK) 19MM X 36M

SPECIFICATIONS



PRODUCT CODE	FHRHOSE
HOSE LENGTH & INTERNAL DIAMETER	36M X 19MM
HOSE CONSTRUCTION	BLACK, RIBBED PVC
OVERALL MASS	11KG



APPLICATION

- The Firex replacement fire hose is ideal for replacing worn, damaged or tired hoses (19mm internal diameter)

FIRE HOSE REEL ACCESSORIES

HOSE REEL NOZZLE JET BRASS 19MM TAPERED



PRODUCT CODE	FHRNB19TA
TYPE	TWIST ACTION - JET
TAIL INLET SIZE	19MM
MATERIAL	BRASS

APPLICATIONS:

Suitable for use with most 19mm fire hose.
Attach with hose clamp.

HOSE REEL NOZZLE SPRAY BRASS B/RUBBER 13MM



PRODUCT CODE	FHRNB13
TYPE	TWIST ACTION – SPRAY
TAIL INLET SIZE	13MM
MATERIAL	BRASS

APPLICATIONS:

Suitable for use with most 13mm fire hose.
Attach with hose clamp.

HOSE REEL NOZZLE SPRAY BRASS B/RUBBER 19MM



PRODUCT CODE	FHRN19
TYPE	TWIST ACTION – SPRAY
TAIL INLET SIZE	19MM
MATERIAL	BRASS

APPLICATIONS:

Suitable for use with most 19mm fire hose.
Attach with hose clamp.

HOSE REEL NOZZLE SPRAY BRASS B/RUBBER 25MM



PRODUCT CODE	FHRNB25
TYPE	TWIST ACTION – SPRAY
TAIL INLET SIZE	25MM
MATERIAL	BRASS

APPLICATIONS:

Suitable for use with most 25mm fire hose.
Attach with hose clamp.

FIRE HOSE REEL ACCESSORIES

HOSE REEL NOZZLE JET BRASS LEVER ACTION 19MM



PRODUCT CODE	FHRNBLA
TYPE	LEVER ACTION – JET
TAIL INLET SIZE	19MM
MATERIAL	BRASS

APPLICATIONS:

Suitable for use with most 19mm fire hose.
Attach with hose clamp.

HOSE REEL NOZZLE SPRAY PLASTIC 19MM



PRODUCT CODE	FHRNP
TYPE	TWIST ACTION - SPRAY
TAIL INLET SIZE	19MM
MATERIAL	PLASTIC

APPLICATIONS:

Suitable for use with most 19mm fire hose.
Attach with hose clamp.

HOSE REEL NOZZLE SPRAY PLASTIC 19MM



PRODUCT CODE	FHRNPA
TYPE	TWIST ACTION - SPRAY
TAIL INLET SIZE	19MM
MATERIAL	BRASS

APPLICATIONS:

Suitable for use with most 19mm fire hose.
Attach with hose clamp.

CABINETS & ACCESSORIES

For keeping fire extinguishers readily visible and easily accessed, a fire cabinet is ideal. Our range of fire extinguisher cabinets includes models that are easy-to-use, sturdy and durable. Each Firex cabinet is constructed from high quality sheet metal finished in high gloss baked enamel paint with silk screen white detail and signage. Firex also offer a range of high quality smaller sized cabinets for logbooks, sprinkler spares, miscellaneous etc. In addition, we offer 003 lock and keys suitable for each cabinet.



FIRE EXTINGUISHER CABINETS

FIRE EXTINGUISHER CABINET METAL - 4.5KG



PRODUCT CODE	FXCAB45
DIMENSIONS W X D X H (MM)	280 X 210 X 590

APPLICATIONS:

Suits up to 4.5kg Extinguishers sizes

FIRE EXTINGUISHER CABINET METAL - 9.0KG



PRODUCT CODE	FXCAB90
DIMENSIONS W X D X H (MM)	280 X 240 X 765

APPLICATIONS:

Suits up to 9.0kg DCP, 9.0L AW & AF,
5.0kg CO2 Fire Extinguisher sizes

FIRE EXTINGUISHER CABINETS

FIRE EXTINGUISHER CABINET PLASTIC DOUBLE - 4.5KG



PRODUCT CODE	FXCAB60P
DIMENSIONS	

APPLICATIONS:

- Suitable for marine environments
- Suits 4.5kg DCP and 3.5kg CO2 Extinguisher sizes

FIRE EXTINGUISHER CABINET PLASTIC DOUBLE – 9.0KG



PRODUCT CODE	FXCAB90PD
DIMENSIONS	

APPLICATIONS:

- Suitable for marine environments
- Suits 9.0kg DCP, 9.0L AW and AF, 7.0L WC, 5.0kg CO2 Extinguisher sizes

FIRE EXTINGUISHER CABINET PLASTIC - 4.5KG



PRODUCT CODE	FXACB60P
DIMENSIONS	700(h) x 290(w) x 260(d) mm

APPLICATIONS:

- Suitable for marine environments
- Suits 4.5kg DCP and 3.5kg CO2 Extinguisher sizes

FIRE EXTINGUISHER CABINET PLASTIC - 9.0KG



PRODUCT CODE	FXCAB90P
DIMENSIONS	830(h) x 300(w) x 260(d) mm

APPLICATIONS:

- Suitable for marine environments
- Suits 9.0kg DCP, 9.0L AW and AF, 7.0L WC, 5.0kg CO2 Extinguisher sizes

HOSE REEL CABINETS

FIRE HOSE REEL CABINET LOCKABLE



PRODUCT CODE	FHRCAB003
DIMENSIONS	H 1050mm x W 750mm x D 370mm

APPLICATIONS:

- This Fire Hose Reel cabinet is suited to wall mounting
- Lockable cabinet to protect your fire hose reel from unauthorised use
- Suits Firex Fire Hose Reels

FIRE HOSE REEL CABINET – BACKING PLATE REPLACEMENT

PRODUCT CODE	FHRCABBP
DIMENSIONS	

APPLICATIONS:

Fire hose reel cabinet backing plate for FHRCAB.



FIRE HOSE REEL CABINET



PRODUCT CODE	FHRCAB
DIMENSIONS	H 1000mm x W 765mm x D 380mm

APPLICATIONS:

- This Fire Hose Reel cabinet is suited to wall mounting
- Suits Firex Fire Hose Reels

HOSE REEL CABINETS

FIRE HOSE REEL NOZZLE & ISOLATION VALVE LOCKABLE BOX




PRODUCT CODE	FXBOXFHRNV
DIMENSIONS	H 250mm x W 250mm x D 160mm

APPLICATIONS:

Lockable box to prevent unauthorised use
of fire hose reel nozzle & isolation valve

FIRE HOSE REEL NOZZLE LOCKABLE BOX

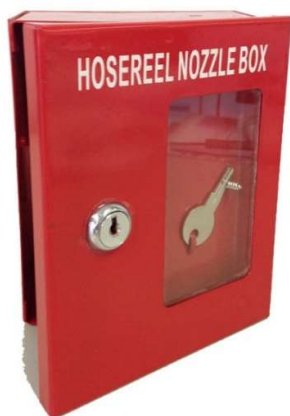

PRODUCT CODE	FXBOXFHRN
DIMENSIONS	H 160mm x W 130mm x D 60mm

APPLICATIONS:

Lockable box to prevent unauthorised
use of fire hose reel nozzle

MISCELLANEOUS CABINETS

SPRINKLER SPARES CABINET



PRODUCT CODE FXCABSSM

APPLICATIONS:

Metal cabinet for storing sprinkler head spares

EMERGENCY KEY STORAGE BOX - METAL



PRODUCT CODE BKGLASSKEYH

APPLICATIONS:

Storage box for storing Emergency keys - with Breakglass panel

EMERGENCY KEY STORAGE BOX - PLASTIC



PRODUCT CODE BGKBOXP

APPLICATIONS:

Storage box for storing Emergency keys - with Breakglass panel

CABINET ALARM



PRODUCT CODE CABALARM

APPLICATIONS:

Anti-theft cabinet alarm

HYDRANT VALVES, HOSES & FITTINGS

Our range of hydrant valves, hoses and fittings is suitable for all states in Australia. Soliciting ideas and specifications from fire authorities, hydraulic consultants, installation experts and government departments, Firex products have been designed to fit specific applications across many industries. Fire Hoses, Hydrants and Fittings come in a vast range of shapes and sizes to fulfill each of the State's fire brigade requirements and regulations. We stock fire hose and hydrant fittings, that include Hydrant Adaptors, Hydrant Straps, Hose Straps, Hydrant Spanners, Fire Hose Couplings, Branch pipes, Fire Nozzles, Storz Fittings, Storz Adaptors, Storz Couplings, Coupling Washers and much more. Our Hydrant Adaptors, Fire Hose Couplings, Branch pipes and Hydrant equipment are manufactured in various threads.



HYDRANT LANDING VALVES



HYDRANT LANDING VALVE NSWFB/SA RG WITH STORZ & CAP

PRODUCT CODE	HLVKNSWFBRG
INLET	Roll Groove
COMPATABILITY	NSW FB & SA
SUPPLIED WITH	Forged Alloy Storz Adapter, Nylon Cap
APPROVALS	AS 2419.2



HYDRANT LANDING VALVE NSW BSP 64mm THREAD x 4.88 PITCH WITH CAP

PRODUCT CODE	HLVNSWBSP64
INLET	BSP Inlet
COMPATABILITY	NSW
SUPPLIED WITH	Nylon Cap
APPROVALS	AS 2419.2



HYDRANT LANDING VALVE QLD RG WITH CAP

PRODUCT CODE	HLVKQLDRG
INLET	Roll Groove
COMPATABILITY	QLD
SUPPLIED WITH	Nylon Cap
APPROVALS	AS 2419.2

HYDRANT LANDING VALVES



HYDRANT LANDING VALVE QLD BSP WITH CAP

PRODUCT CODE	HLVQLDBSP
INLET	BSP
COMPATABILITY	QLD
SUPPLIED WITH	Nylon Cap
APPROVALS	AS 2419.2



HYDRANT LANDING VALVE "COCK" PITCH VIC/TAS RG WITH STORZ & CAP

PRODUCT CODE	HLVKVICSTRG
INLET	Roll Groove
COMPATABILITY	VIC & TAS
SUPPLIED WITH	Forged Alloy Storz Adapter, Nylon Cap
APPROVALS	AS 2419.2



HYDRANT LANDING VALVE WA/NT 65mm BIC RG WITH PLUG

PRODUCT CODE	HLVWARG
INLET	Roll Groove
COMPATABILITY	WA & NT
SUPPLIED WITH	Nylon Plug
APPROVALS	AS 2419.2