

	Proxylab	17/12/2024
	AP NAVAJO	

Proxylab – AP NAVAJO

SOMMAIRE

1	Configuration post WEB	2
1.1	Attribution interfaces.....	2
1.2	Attribution adresse IP	2
2	Configuration WEB	2
2.1	Dashboard	2
2.2	Installation du service	3
2.3	Status des Interfaces.....	4
2.4	Règles du PARE FEU	5
2.5	Table de routage	5
2.6	DNS Forwarder	6
2.7	Server NTP	6
2.8	HA-PROXY.....	6

1 Configuration post WEB

1.1 Attribution interfaces

Nous devons attribuer les interfaces pour chaque réseaux LAN et WAN :

```
WAN (wan) -> em1
LAN (lan) -> em0
```


1.2 Attribution adresse IP

Nous devons attribuer les adresses IP sur les interfaces :

```
WAN (wan) -> em1 -> v4/DHCP4: 192.168.50.221/24
LAN (lan) -> em0 -> v4: 172.18.4.2/27
```


2 Configuration WEB

2.1 Dashboard

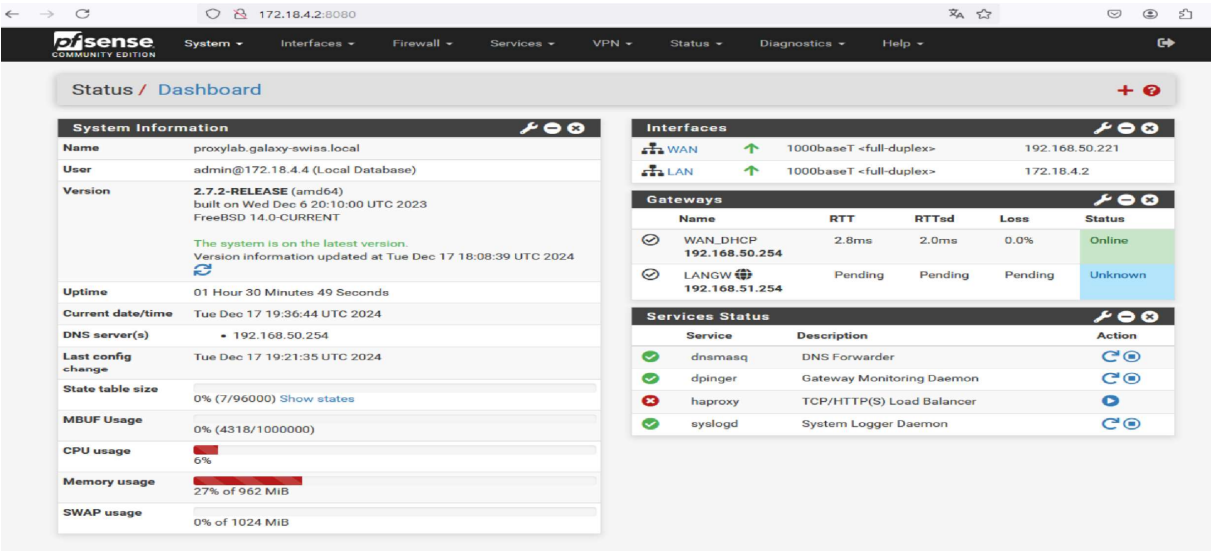


2.2 Installation du service

Allez dans « Package Manager »

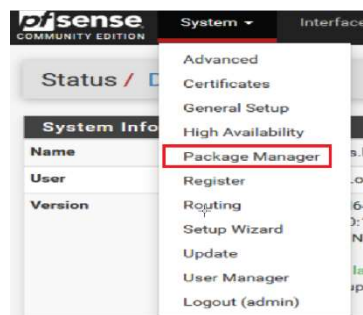

Rendez-vous dans « Available Packages » et reherchez haproxy

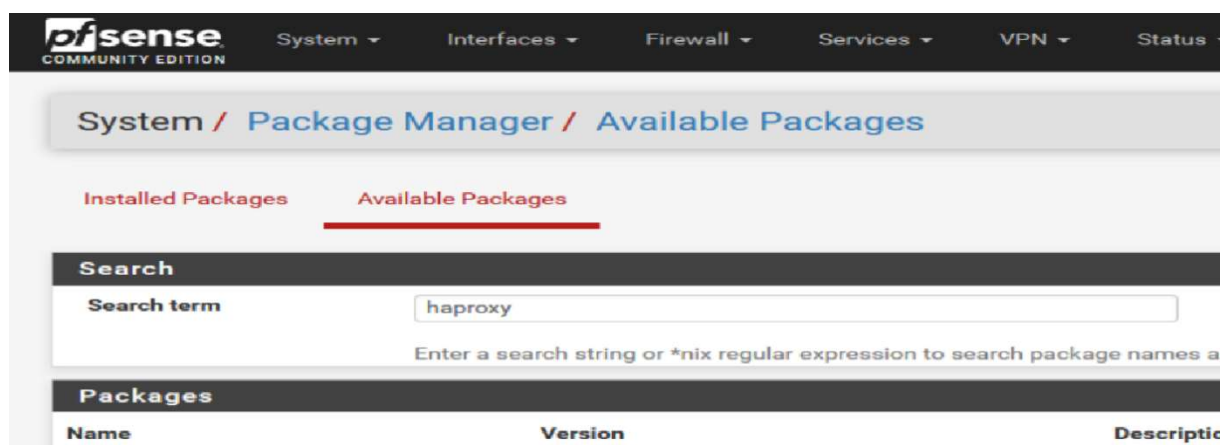

Installez-le et maintenant il apparaîtra sur l'onglet service



2.3 Status des Interfaces

Pour la WAN

WAN Interface (wan, em1)

Status

up

DHCP

up ☐ Relinquish Lease

MAC Address

08:00:27:89:ad:6b

IPv4 Address

192.168.50.221

Subnet mask IPv4

255.255.255.0

Gateway IPv4

192.168.50.254

IPv6 Link Local

fe80::a00:27ff:fe89:ad6b%em1

DNS servers

192.168.50.254

192.168.50.254

MTU

1500

Media

1000baseT <full-duplex>

In/out packets

11740/11770 (343 KiB/529 KiB)

In/out packets (pass)

11740/11770 (343 KiB/529 KiB)

In/out packets (block)

874/0 (189 KiB/0 B)

In/out errors

0/0

Collisions

0

Interrupts

19246 (3/s)

Pour la LAN

LAN Interface (lan, em0)

Status

up

MAC Address

08:00:27:06:54:35

IPv4 Address

172.18.4.2

Subnet mask IPv4

255.255.255.224

IPv6 Link Local

fe80::a00:27ff:fe06:5435%em0

MTU

1500

Media

1000baseT <full-duplex>

In/out packets

5806/13488 (1.36 MiB/5.35 MiB)

In/out packets (pass)

5806/13488 (1.36 MiB/5.35 MiB)

In/out packets (block)

97/2 (12 KiB/172 B)

In/out errors

0/0

Collisions

0

Interrupts

12914 (2/s)

2.4 Règles du PARE FEU

WAN

Firewall / Rules / WAN

Floating

WAN

LAN

Rules (Drag to Change Order)

	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
☒	0/0 B	*	Reserved Not assigned by IANA	*	*	*	*	*		Block bogon networks	
☒	0/0 B	IPv4 TCP	*	*	172.18.4.3	443 (HTTPS)	*	none			
☒	10/58 KiB	IPv4 *	*	*	*	*	*	none			
☒	0/0 B	IPv4 TCP	*	*	*	80 (HTTP)	*	none			
☒	0/0 B	IPv4 TCP	*	*	172.18.4.3	80 (HTTP)	*	none		NAT test	

↑ Add

↓ Add

Delete

Toggle

Copy

Save

Separator

LAN

Firewall / Rules / LAN

Floating

WAN

LAN

Rules (Drag to Change Order)

	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
☒	7/214 KiB	*	*	*	LAN Address	80	*	*		Anti-Lockout Rule	
☒	0/3 KiB	IPv4 *	*	*	*	*	*	none			
☒	0/0 B	IPv4 TCP	LAN address	*	*	*	*	none			
☒	0/0 B	IPv4 *	LAN subnets	*	*	*	*	none		Default allow LAN to any rule	

↑ Add

↓ Add

Delete

Toggle

Copy

Save

Separator

2.5 Table de routage

Connectée

Gateways

Static Routes

Gateway Groups

Gateways

	Name	Default	Interface	Gateway	Monitor IP	Description	Actions
☒	WAN_DHCP		WAN	192.168.50.254	192.168.50.254	Interface WAN_DHCP Gateway	
☒	LAN		LAN	172.18.4.2	172.18.4.2		
☒	MUTLAB		LAN	172.18.4.1	172.18.4.1		

Save

Add

Static

System / Routing / Static Routes

Gateways

Static Routes

Gateway Groups

Static Routes

	Network	Gateway	Interface	Description	Actions
☒	192.168.154.0/24	MUTLAB - 172.18.4.1	LAN		
☒	172.16.0.0/17	MUTLAB - 172.18.4.1	LAN		

Add

2.6 DNS Forwarder

General DNS Forwarder Options

Enable

☒ Enable DNS forwarder

DNS Query Forwarding

☐ Query DNS servers sequentially
If this option is set pfSense DNS Forwarder (dnsmasq) will query the DNS servers sequentially in the order specified (System - General Setup - DNS Servers), rather than all at once in parallel.

☐ Require domain
If this option is set pfSense DNS Forwarder (dnsmasq) will not forward A or AAAA queries for plain names, without dots or domain parts, to upstream name servers. If the name is not known from /etc/hosts or DHCP then a "not found" answer is returned.

☐ Do not forward private reverse lookups
If this option is set pfSense DNS Forwarder (dnsmasq) will not forward reverse DNS lookups (PTR) for private addresses (RFC 1918) to upstream name servers. Any entries in the Domain Overrides section forwarding private "n.n.n.in-addr.arpa" names to a specific server are still forwarded. If the IP to name is not known from /etc/hosts, DHCP or a specific domain override then a "not found" answer is immediately returned.

Listen Port

53

The port used for responding to DNS queries. It should normally be left blank unless another service needs to bind to TCP/UDP port 53.

Interfaces

All
WAN
LAN
WAN IPv6 Link-Local

Interface IPs used by the DNS Forwarder for responding to queries from clients. If an interface has both IPv4 and IPv6 IPs, both are used. Queries to other interface IPs not selected above are discarded. The default behavior is to respond to queries on every available IPv4 and IPv6 address.

2.7 Server NTP

NTP Server Configuration

Enable

☒ Enable NTP Server
You may need to disable NTP if pfSense is running in a virtual machine and the host is responsible for the clock.

Interface

WAN
LAN
Localhost

Interfaces without an IP address will not be shown.
Selecting no interfaces will listen on all interfaces with a wildcard.
Selecting all interfaces will explicitly listen on only the interfaces/IPs specified.

Time Servers

2.pfsense.pool.ntp.org

☐ Prefer

☐ No Select

Pool
Type

Add

+ Add

2.8 HA-PROXY

Configuration du reverse proxy

Frontends :

Frontends									
Primary	Shared	On	Advanced	Name	Description	Address	Type	Backend	Actions
☐	☒	☒	☐	extralab.galaxy-swiss.local		192.168.50.221:80	http	extralab.galaxy-swiss.local (default)	  

Backend :

Backends					
Advanced	Name	Servers	Check	Frontend	Actions
☒	extralab.galaxy-swiss.local	1	HTTP	extralab.galaxy-swiss.local	  