


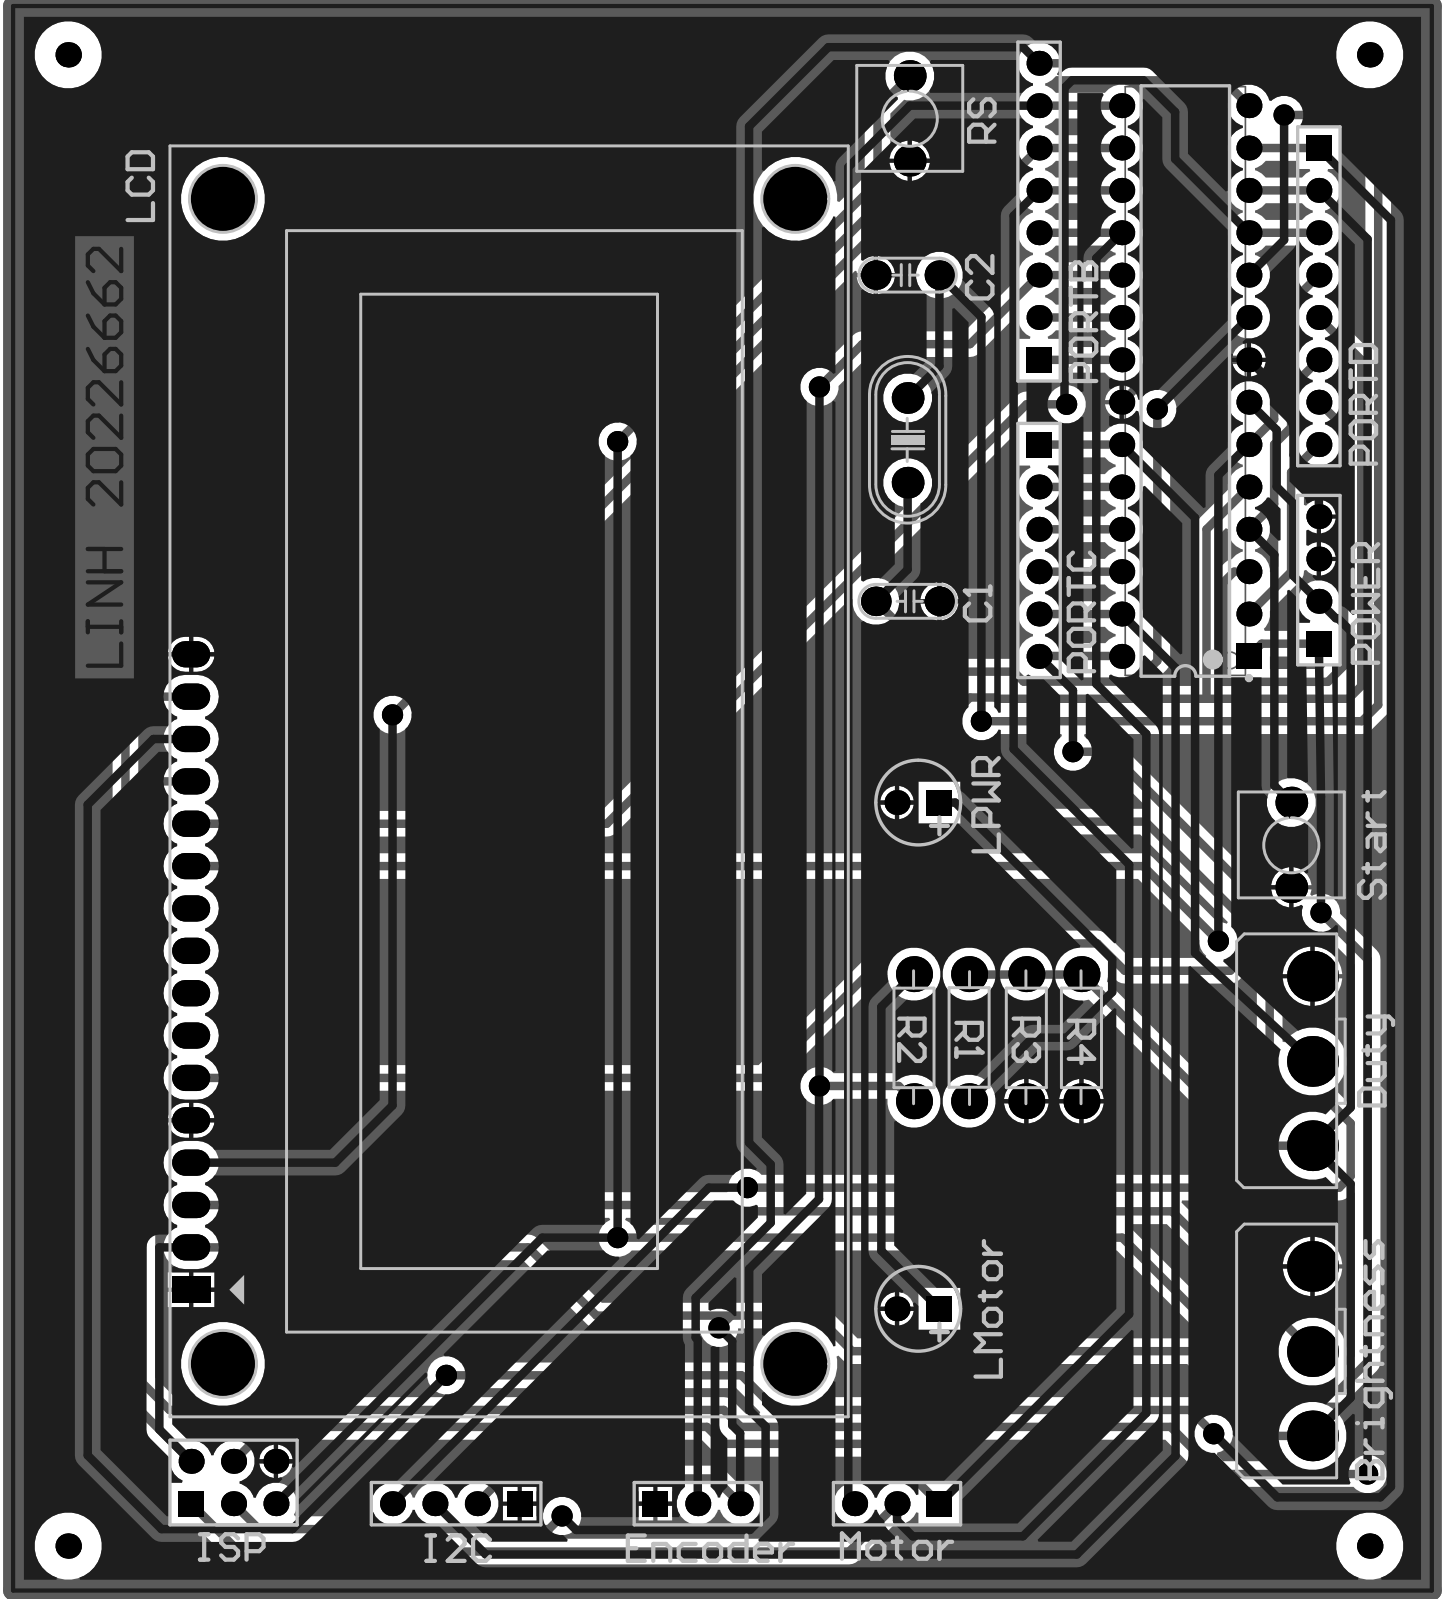

Comment	Description	Designator	Footprint	LibRef	Quantity
ATmega8A-PU	8-bit AVR Microcontroller, 8KB Flash, 512 Bytes EEPROM, 1KB SRAM, 28-pin PDIP, Industrial Grade (-40°C to 85°C)	ATMEGA8	28P3	ATmega8A-PU	1
10K	Var Resistor	Brightness, Duty	VOL-S	VOL-S	2
22uF	Cap np 682pF=> 104pF	C1, C2	CN1.5	CN1.5	2
16MHz	Crystal For all Crystal 2pin.	Crystal	XT2	XT2	1
	Header, 3-Pin	Encoder, Motor	HDR1X3	Header 3	2
	Header, 4-Pin	I2C	HDR1X4	Header 4	1
Header 3X2	Header, 3-Pin, Dual row	ISP	HDR2X3	Header 3X2	1
CD16x2A	LCD display 16 char, 2 line	LCD	LCD16X2	LCD16x2	1
LED5	LED 5mm	LMotor, LPWR	LED5MM	LED 5mm	2
Header 8	Header, 8-Pin	PORTB	HDR1X8	Header 8	1
	Header, 6-Pin	PORTC	HDR1X6	Header 6	1
	Header, 8-Pin	PORTD	HDR1X8	Header 8	1
Header 4	Header, 4-Pin	POWER	HDR1X4	Header 4	1
220	Resistor 1/4W	R1, R2	RES-1/4W-SMALL	RES1/4W	2
12K	Resistor 1/4W	R3, R4	RES-1/4W-SMALL	RES1/4W	2
SW	Switch button 2 pin	RS	SW2	SW2	1
	Switch button 2 pin	Start	SW2	SW2	1