


CHIP INDUCTOR 10000 SERIES

FECHA: Septiembre 12 2025	DWG: 10015
DRAWN: Vivi	APPROVED BY: 

Bobina	<i>B-1003-6 (Polvo de hierro)</i> <i>Largo. 0.097-0.098</i> <i>Corte: 0.053-0.054</i>
Alambre	<i>35 H.E</i>
Vueltas	<i>5.5</i>
Tipo de embobinado	<i>Close Layer</i>

MARCAR PUNTO
LASER

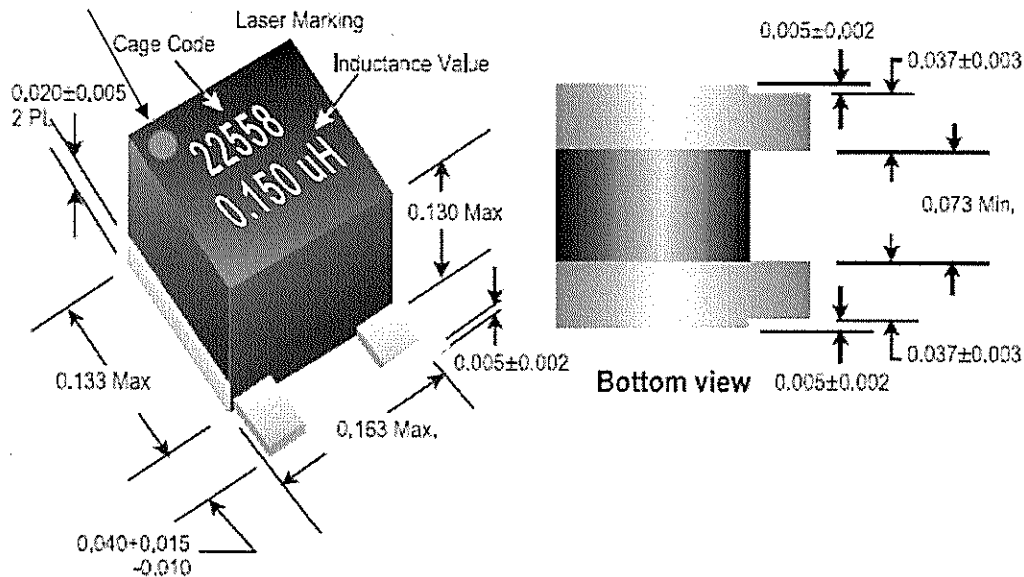

CARACTERÍSTICAS ELECTRICAS						
Inductance ±2% (µH)	Q min	Q typ	Test freq (MHz)	SRF (min) (MHz)	DCR (max) (Ohms)	Current (max) (mA)
0.150 147-153nH	75	87	50	400	0.08 (80mΩ)	790

NOTE:
