


CHIP INDUCTOR 10000 SERIES

FECHA: Octubre-08-2025	DWG: 10052
DRAWN: Fernanda	APPROVED BY: 

Bobina	<i>B-1003-2(Polvo de hierro)</i> <i>Largo: 0.096-0.098</i> <i>Corte: 0.050-0.051</i>
Alambre	44 S.E
Vueltas	214.5
Tipo de embobinado	RANDOM
Programa No.1 Traverse	Pitch 340 Lenght 94
Programa No.1 Contador	209
Tensión	6

MARCAR PUNTO
LASER

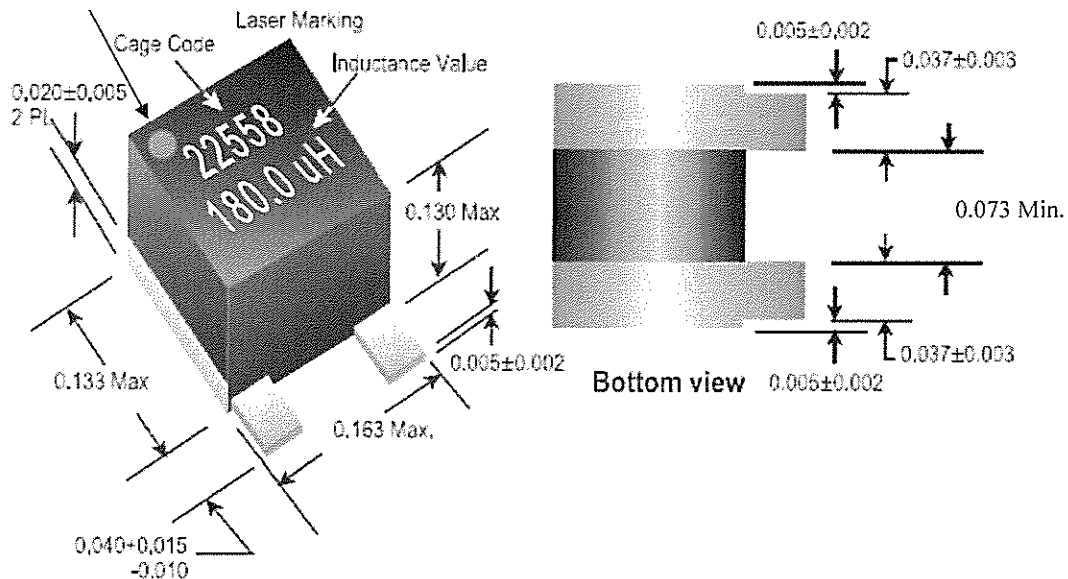

CARACTERÍSTICAS ELECTRICAS						
Inductance ±10% (μH)	Q min	Q typ	Test freq (MHz)	SRF (min) (MHz)	DCR (max) (Ohms)	Current (max) (mA)
180 (162 – 198)	40	48	0.79	5	18.0	52

NOTE:
