


CHIP INDUCTOR 10000 SERIES

FECHA: 08/07/2009	DWG: 10103
DRAWN: Alvaro	CUST. P/N:
REVISED: 	APPROVED BY: 

BOBINA	B-1003-2
ALAMBRE	43 S.E
VUELTAS	80
TIPO DE EMBOBINADO	2 Secc. No Gap

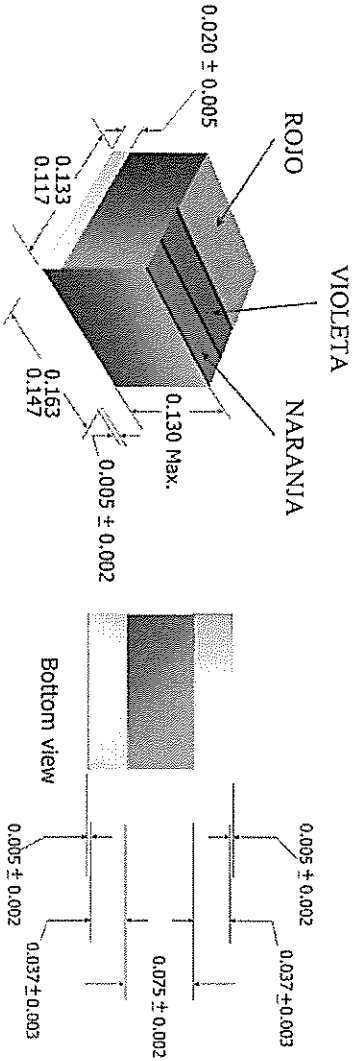

CARACTERÍSTICAS ELECTRICAS						
Inductance ±10% (μH)	Q min	Q typ	Test freq (MHz)	SRF (min) (MHz)	DCR (max) (Ohms)	Current (max) (mA)
27.0 (24.3- 29.7)	65	75	2.5	15	4.0	110

NOTE:

Nota: Testear la Orden en la maquina 4192. 