


CHIP INDUCTOR 8000 SERIES

FECHA: Nov-10-25	DWG: 8013
DRAWN: Fernanda	APPROVED BY: 

BOBINA	<i>B-8000-6 (polvo de hierro)</i> <i>Largo: 86-88 (milésimas)</i> <i>Corte: 32-33(milésimas)</i>
ALAMBRE	36 H.E.
VUELTAS	6.5
TIPO DE EMBOBINADO	Close Layer

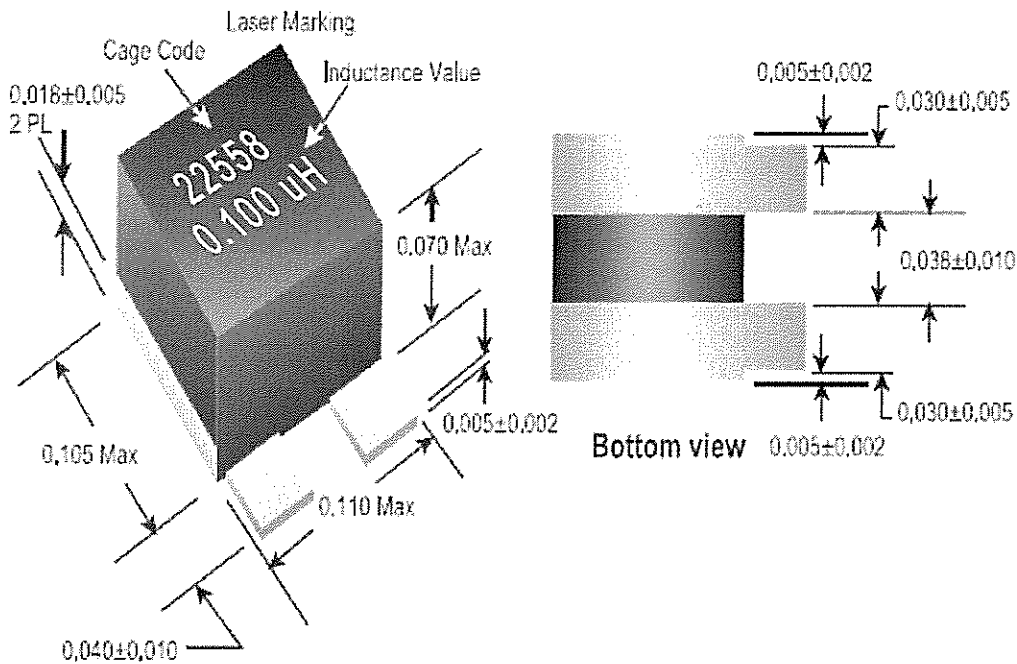

CARACTERÍSTICAS ELECTRICAS						
Inductance $\pm 10\%$ (μ H)	Q min	Q typ	Test freq (MHz)	SRF (min) (MHz)	DCR (max) (Ohms)	Current (max) (mA)
0.100 (90 - 110 nH)	47	55	50	580	0.11 (110m Ω)	470

NOTE:
